

CV- Series Valve Testers

Data Sheet

Valves 2" to 16" and up to 10,000 psi

Control valves are critical to regulating flow characteristics & mitigating load variances in your control loop. The CV series testers allow you to easily perform shell, seat, and leakage rate tests from one simple control panel. Valves are loaded in the horizontal position and then rotated 90° to eliminate trapped air before testing.



Model	Valve Size	Test PSI	Clamping
CV060	2" - 6"	3K - 10K	60 Tons
CV100	2" - 12"	3K - 10K	100 Tons
CV200	2" - 16"	3K - 10K	200 Tons

Features:

- Quick clamp and fill to save set-up time
- 3000, 6000 or 10000 psi hydro test
- 150 psi air test
- Test on either side of the valve
- Flow meters measure 10-1800 SCFH
- Bubble leak test
- Stainless steel seal plate
- Compact design at 40 ft² floor space

Options:

- Increased hydro testing capacities
- Water Recycling
- Data Acquisition System
- Safety Barriers


Applications:

- Globe Valves
- Ball Valves
- Plug Valves
- Butterfly Valves

Connections:

- All Standard Flange Types

Specifications:

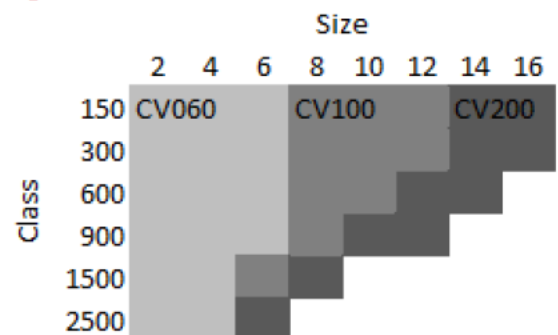

*Size based on standard valve flange size

*Capacity based on standard FT capacity @ shell test psi



www.DunnsValveTesters.com
Sales@DunnsValveTesters.com
+1 (281) 350-4767
© Copyright Dunns Valve Testers, Inc.
All rights reserved. 03/01/2021