

Specifications


Frequency range: DC-18GHz

Nominal Impedance: 50 Ohm

VSWR: 1 .20:1 max. @ 18 GHz

Oper. Temperature range ; -55C- +155C

RoHS Compliant

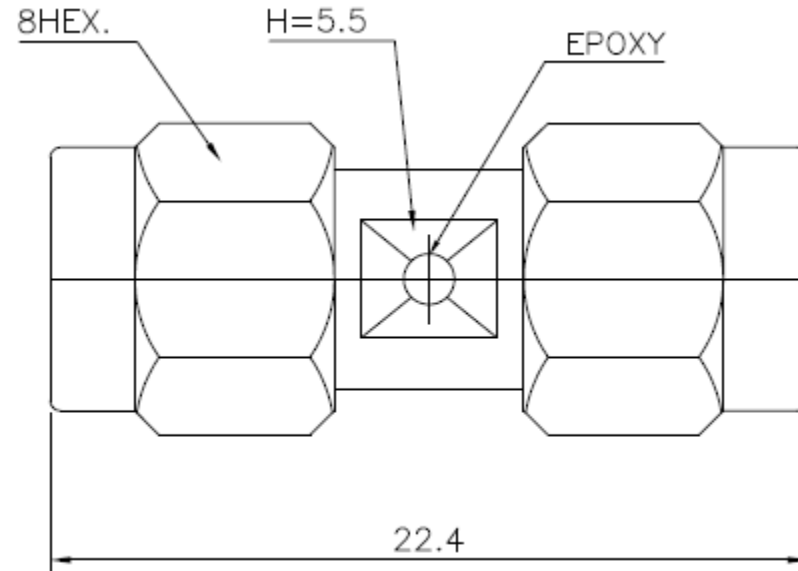

Adapter Part

Material

Plating

Coupling Cap

Stainless Steel

Gold

Body

Stainless Steel

Gold

Center contact

Brass

Gold

Insulator

PTFE

N/A



Premier RF

17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premierRF.com
 www.premierRF.com

Dimensions in mm	PART NUMBER	PRF-AD1M1M-SG
11/04/2012	DESCRIPTION	SMA MALE TO SMA MALE ADAPTER, DC-18 GHz
APPROVED		
C. Smith		