

**Specifications**

Frequency range: DC-4 GHz

Nominal Impedance: 50 Ohm


VSWR: 1 .20:1 max. @ 4 GHz

Oper. Temperature range ; -65C- +125C

**RoHS Compliant**



5/8-24UNEF-2A

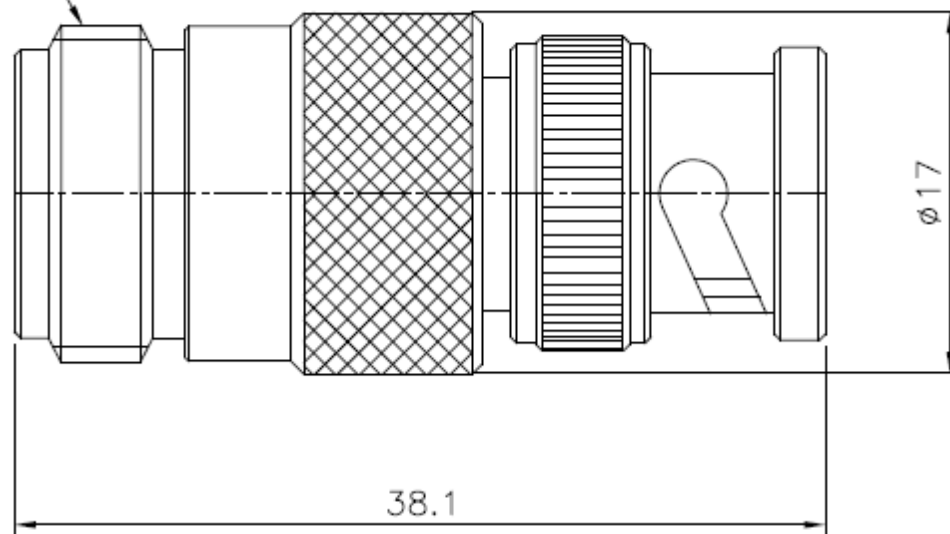

<u>Adapter Part</u>	<u>Material</u>	<u>Plating</u>
Coupling Cap	Brass	Nickel
Body	Brass	Nickel
Center contact	Beryllium Copper	Gold
Insulator	PTFE	N/A



**Premier RF**  
 17 Roslyn CT  
 Patchogue, NY 11772  
 PH: 631-447-3804  
 sales@premier rf.com  
 www.premier rf.com

Dimensions in mm	<b>PART NUMBER</b>	<b>PRF-AD2F3M</b>
03/10/2012	<b>DESCRIPTION</b>	<b>N FEMALE TO BNC MALE ADAPTER, DC-4 GHz</b>
APPROVED		
C. Smith		