

SPECIFICATIONS:

Impedance: 50 Ohm

Frequency: DC-50 GHz

VSWR:


DC-40 GHz: 1.40:1

40-50 GHz: 1.60:1

Input Power: 1 Watt

Operating temp. : -45°C - +85°C

Part	Material	Plating
Barrel & Coupling Nut	Stainless Steel	Passivated
2.4mm Connector	Beryllium Copper	Gold
Conductors	Beryllium Copper	Gold

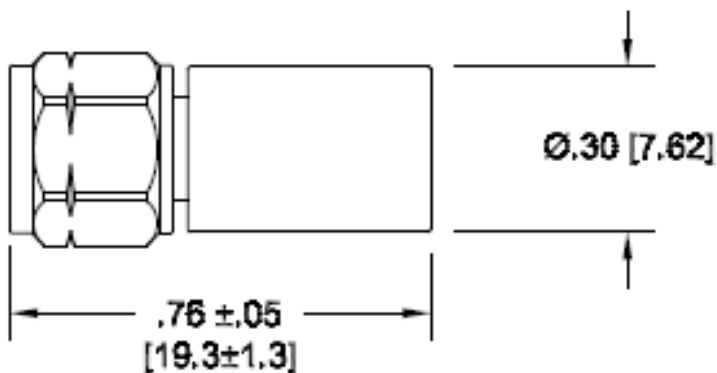

Dimensions are for reference only, and are subject to change without notice.



Premier RF
 17 Roslyn CT
 Patchogue, NY 11772
 PH: 631-447-3804
 sales@premier rf.com
 www.premier rf.com

	PART NUMBER	PRF-TE22M150-SP
02/12/2012	DESCRIPTION	2.4MM MALE TERMINATION DC-50 GHz, 1 WATT
APPROVED		
A. Ianacci		