



Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____

LED 4FT 17W Type B Series



FEATURES

- NSF approved
- Type B Double Ended
- Low thermal decay & maintenance
- No Mercury or UV
- IP20 rated
- Suitable for enclosed fixtures
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

NSF Model Numbers:

- LOC-T84FT-17W50K-G B
- LOC-T84FT-17W65K-G B

CONSTRUCTION:

Glass body and soft light.

OPTICAL SYSTEM:

Bridgelux 2835 LED chips. 240° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. double ended is available which can be compatible with shunted or non-shunted sockets. -20°C to 45°C, -4°F to 113°F.

INSTALLATION & MOUNTING:

Type B double ended.




ORDERING NUMBER	CCT	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
rLE-4T8B-17-50	5,000K	17W	2,200LM	130LM/W	80	0.9	15%	32W
rLE-4T8B-17-65	6,500K	17W	2,200LM	130LM/W	80	0.9	15%	32W

LED 4FT 17W Type B Series



Series	Type	Wattage	CCT Options	Lens	Power
rLE	T8 4 Foot	17W	5000K 6500K	Frosted Glass	Type B

MEASUREMENTS

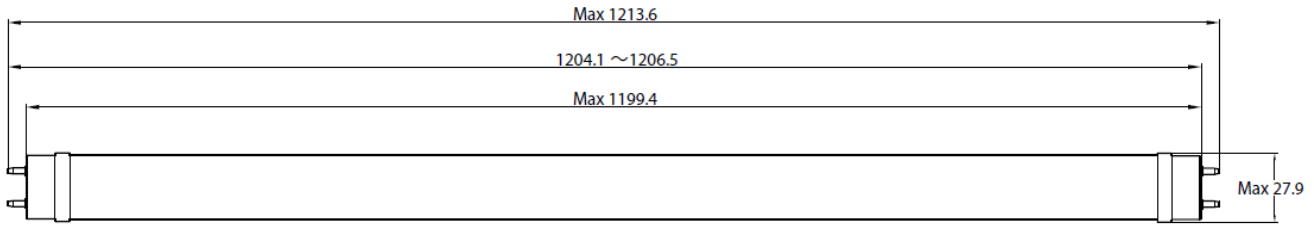

PHOTOMETRIC DATA

