

## Mirafi® S-Series Nonwoven Polypropylene Geotextiles for geomembrane liner protection, landfill gas collection, and landfill drainage systems

TenCate™ develops and produces materials that function to increase performance, reduce costs and deliver measurable results by working with our customers to provide advanced solutions.

The Difference Mirafi® S-Series Nonwoven Geotextiles Make:

- **Construction.** Mirafi® S-Series polypropylene nonwoven geotextiles easily conform to the ground or trench surface for trouble-free installation.
- **Strength.** Mirafi® S-Series geotextiles withstand installation stresses with high puncture and tear resistance.
- **Drainage.** High permittivity properties provide high water flow rates while providing excellent soil retention.
- **Environmental.** Mirafi® S-Series geotextiles are chemically stable in a wide range of aggressive environments.
- **Cost Effective.** Mirafi® S-Series geotextiles provide economical solutions to many civil engineering applications including a cost-effective alternative to graded-aggregate filters.

### APPLICATIONS

Mirafi® S-Series nonwoven geotextiles are used in a wide variety of applications in the environmental market. These include separa-

tion, filtration, and protection applications.

Mirafi® S-Series nonwovens are used in critical subsurface drainage systems, soil separation, permanent erosion control, HDPE and other geomembranes in landfill construction. These geotextiles provide the required puncture strength and abrasion resistance to withstand installation and application stresses to create an effective long-term solution. Other applications for Mirafi® S-Series nonwovens in landfill applications include leachate collection/removal systems and for gas collection and venting systems.

Nonwoven geotextiles play a critical role in the collection of liquids in waste containment systems. The nonwoven geotextiles prevent clogging of the collection pipes and drainage aggregates. The successful removal of these liquids is critical to the performance of the landfill site. Mirafi® S-Series geotextiles assist in maintaining an outlet for gases to escape from below the liner systems. Gases may also travel within the nonwoven fabrics laterally until it reaches a vent. For these collection systems to be effective, they must have a properly designed protective filter. Mirafi® S-Series Nonwoven Geotextiles allow designers flexibility in finding an economic source of a specific aggregate gradation and assuring that the in-place aggregate provides effective filter performance.



Mirafi® S-Series Nonwoven Geotextiles

### INSTALLATION GUIDELINES\*

Mirafi® S-Series should be handled and deployed in a way that prevents damage to the geotextile. The subgrade surface should even and free of debris of any kind. Adjacent panels of Mirafi® S-Series geotextile shall be overlapped, sewn or heat-seamed unless another method of seaming is specified by the engineer. It is important that overlapped panels of nonwoven geotextile be continuously joined to prevent any migration of soil through the overlaps. Overlap requirements for Mirafi® S-Series geotextiles should be specified by the project engineer or agency or follow the most current AASHTO M288 geotextile installation guidelines in absence of project specifications. In windy conditions, the outside edges of deployed panels of Mirafi® S-Series geotextile should be weighted down with sandbags or an equivalent manner as directed by the project engineer or agency. The sandbags should remain in place until the adjacent geotextile panel is fastened or until an overlying layer of material is placed.

\* These guidelines serve as a general basis for installation. Detailed instructions are available from your TenCate™ representative.




## Mirafi® S-Series Nonwoven Polypropylene Geotextiles

for geomembrane liner protection, landfill gas collection, and landfill drainage systems


| Property / Test Method                             | Units  | S600        | S800       | S1000      | S1200      | S1600       |
|--|--|-------------|------------|------------|------------|-------------|
| <b>MECHANICAL PROPERTIES</b>                       |  |             |            |            |            |             |
| <b>Grab Tensile Strength</b><br>ASTM D 4632        |  |             |            |            |            |             |
| Strength @ Ultimate                                | N (lbs)  | 0.712 (160) | 1024 (230) | 1179 (265) | 1380 (310) | 1891 (425)  |
| Elongation @ Ultimate                              | %  | 50          | 50         | 50         | 50         | 50          |
| <b>Trapezoidal Tear Strength</b>                   |  |             |            |            |            |             |
| ASTM D 4533  | N (lbs)  | 289 (65)    | 401 (90)   | 445 (100)  | 534 (120)  | 645 (145)   |
| <b>CBR Puncture Strength</b>                       |  |             |            |            |            |             |
| ASTM D 6241  | N (lbs)  | 2003 (450)  | 2670 (600) | 3115 (700) | 4005 (900) | 5340 (1200) |
| <b>UV Resistance after 500 hrs.</b><br>ASTM D 4355 |  |             |            |            |            |             |
|  | % strength   | 80          | 80         | 80         | 80         | 80          |
| <b>HYDRAULIC PROPERTIES</b>                        |  |             |            |            |            |             |
| <b>Apparent Opening Size (AOS)</b>                 |  |             |            |            |            |             |
|  | US Sieve   | 80          | 100        | 100        | 100        | 100         |
| ASTM D 4751  |  |             |            |            |            |             |
| <b>Permittivity</b>                                | mm sec <sup>-1</sup>                               | .18         | 0.15       | 0.15       | 0.15       | 0.15        |
|  |  | 1.5         | 1.36       | 1.0        | 0.9        | 0.7         |
| ASTM D 4491  |  |             |            |            |            |             |
| <b>Flow Rate</b>                                   |  |             |            |            |            |             |
| ASTM D 4491  | l/min/m <sup>2</sup><br>(gal/min/ft <sup>2</sup> ) | 4481 (110)  | 4074 (100) | 3056 (75)  | 2648 (65)  | 2037 (50)   |
| <b>Packaging</b>                                   |  |             |            |            |            |             |
| Roll Width   | m (ft)   | 4.5 (15)    | 4.5 (15)   | 4.5 (15)   | 4.5 (15)   | 4.5 (15)    |
| Roll Length  | m (ft)   | 91 (300)    | 91 (300)   | 91 (300)   | 91 (300)   | 91 (300)    |
| Est. Gross Weight                                  | kg (lbs)   | 104 (230)   | 130 (286)  | 164 (361)  | 189 (417)  | 240 (530)   |
| Area   | m <sup>2</sup> (yd <sup>2</sup> )                  | 418 (500)   | 418 (500)  | 418 (500)  | 418 (500)  | 418 (500)   |

\*NOTE: Mechanical Properties and Hydraulic Properties shown are Minimum Average Roll Values (MARV). Apparent Opening Size (AOS) properties shown are Maximum Average Roll Values. (Values and methods could change without notice)


### Mirafi® S-Series Nonwoven Geotextiles

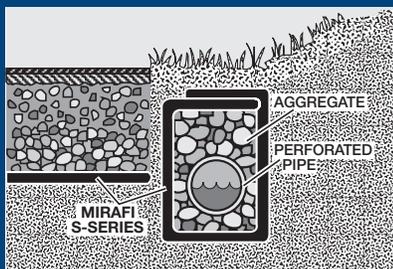

Cut-off/Interceptor Drain

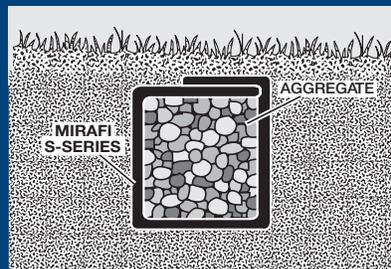

French Drain Without Pipe

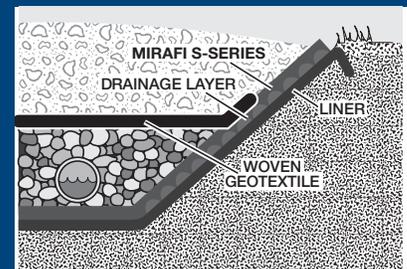

Liner Protection Within a Landfill

TenCate™ Geosynthetics North America assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate™ Geosynthetics North America disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of TenCate Geosynthetics North America.

PDS.S0510

365 South Holland Drive  
Pendergrass, GA 30567  
Tel 800 685 9990  
Tel 706 693 2226  
Fax 706 693 4400  
www.mirafi.com

