

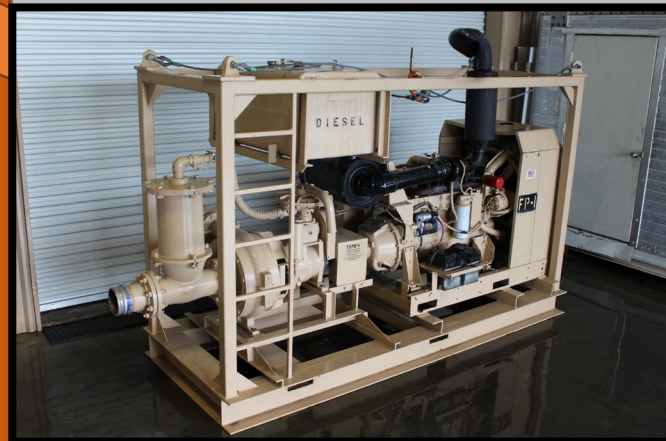


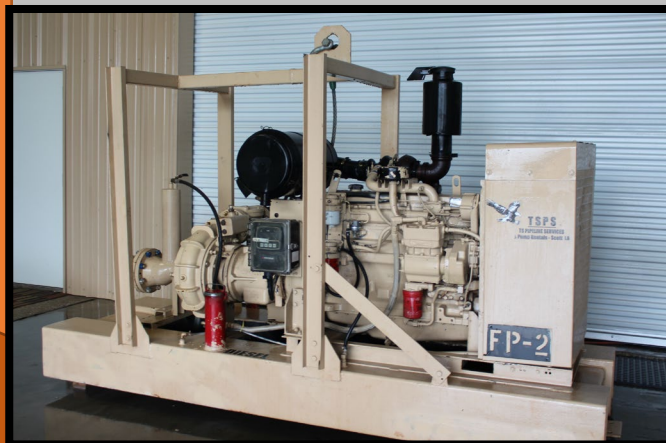

# Tier 2

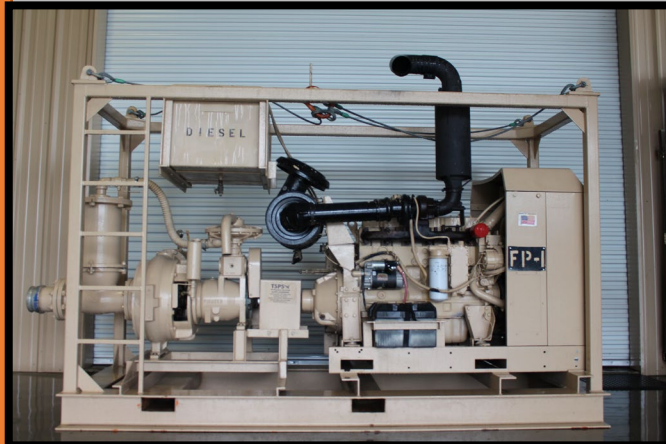


## Displacement (Fill) Pump Tier 2

This style of pump is mainly used for filling a pipeline with water prior to performing the actual Hydrotest. This tier of fill pump is best used for smaller to medium applications.



These units are intended for Medium Bore Long Lines, Large Bore Short Lines, and Large Fabrication Systems



(20,000-250,000) Gal  
Effective  
Displacement Range



(500-1800) GPM  
Flow Rate



3" - 4" Discharge/  
Tie-in Ports

It all starts with a  
phone call.

Contact us Today.

**337-935-6082**