



1		2		3	
TECHNICAL SPECIFICATION		METERIAL		FINISH	
FREQUENCY RANGE	DC~18GHz	Inner conductor	Beryllium copper	Gold	
IMPEDANCE	≥5000MΩ	Insulator	PEI	——	
OPERATING TEMP	-55℃~+70℃	Body	Stainless steel 303	Passivated	
VSWR	≤1.25	Nut	Stainless steel 303	Passivated	

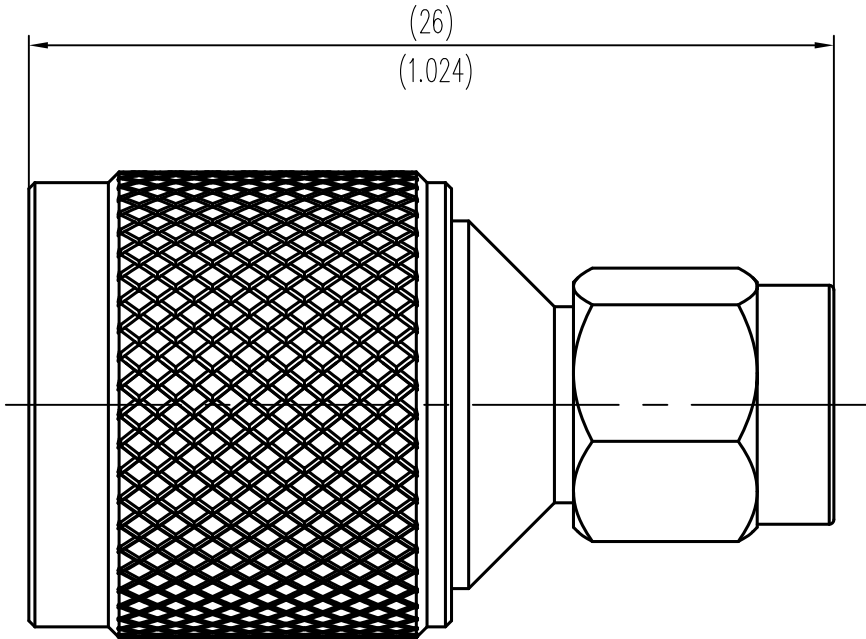

UNLESS OTHERWISE SPECIFIED
1) ALL DIMENSIONS ARE AFTER PLATING.
2) BREAK CORNERS & EDGES.005 R. MAX.
3) CHAM. 1ST & LAST THREADS.
4) SURFACE ROUGHNESS 63 √ MIL-STD-10.
5) DIA S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .004 T.I.R.
6) REMOVE ALL BURRS

DRAWN:

CHECKED:

STANDARDIZATION:

APPROVED:



LANJIAN ELECTRONICS, INC

DWG.NO. TNC-SMA-MM

TITLE: SIZE 4:1

CAGE CODE: SHEET 1/1

PROPRIETARY
THE INFORMATION CONTAINED IN THIS DRAWING
IS THE SOLE PROPERTY OF LANJIAN, INC.
WITHOUT THE WRITTEN PERMISSION OF
LANJIAN ELECTRONICS , INC IS PROHIBITED.