



ERA OILFIELD
SERVICES lubricants

LITHIUM MOLYBDENUM DISULFIDE GREASE

PERFORMANCE CHARACTERISTICS

- EXTREME PRESSURE GREASE
- LOW TEMP APPLICATIONS
- LOW TEMP HIGH PRESSURE PERFORMANCE
- HIGH WEAR RESISTANCE
- REDUCES FRICTION COEFFICIENT BETWEEN MOVING PARTS
- REDUCES FRICTION RESISTANCE BETWEEN MOVING PARTS
- HIGH MECHANICAL STABILITY
- HIGH OXIDATION STABILITY
- LONG LIFE APPLICATION
- ENVIRONMENTALLY SAFE
- CONTAINS ZERO HEAVY METALS
- CONTAINS ZERO NITRITES

GENERAL APPLICATIONS

- BEARINGS
- COUPLINGS
- GENERAL MOVING PARTS
- HIGH LOAD MOVING PARTS
- HIGH PRESSURE MOVING PARTS
- GEARBOXES ALL TYPES
- SUITABLE FOR LOW TEMP AT HIGH LOAD
- EXCELLENT GENERAL LOW TEMP GREASE FOR MINING AND HEAVY INDUSTRIAL PLANT

OPERATING TEMPERATURE

- -20 C TO 120 C

PRODUCT COMPOSITION

- HIGH QUALITY MINERAL OIL
- ADVANCED FATTY ACID LITHIUM SOAP
- ANTI OXIDANTS
- MOLYBDENUM DISULPHIDE ADDITIVE

ERA Oilfield
Services

lubricants

66/69 Moo 4, Soi 17, Phayun, Ban
Chang, Rayong, Thailand
21130
Phone: +66 8 4345 8730
www.info@eraoilfieldservices.com



LITHIUM
MOLYBDENUM
DISULFIDE
GREASE

Lubricants at work for you


LITHIUM MOLYBDENUM DISULFIDE GREASE

- COST EFFECTIVE
- DESIGNED HIGH LOAD / HIGH PRESSURE
- HIGH FRICTION REDUCTION
- HIGHLY STABLE
- PREMIUM PRODUCT
- LOW TEMP APPLICATIONS
- MINING AND HEAVY INDUSTRIAL PLANT
- LONG LIFE APPLICATION
- NO HEAVY METALS OR NITRITES

Finding the right lubricant, when you need it, at a price that meets your budget and one that performs to the highest technical performance requirements.

ERA, have over 12 years of experience supplying heavy industry, drilling, mining and production.

We now expand our excellence to ensure that our clients have the best lubricants to maximise asset lifespan and improve asset performance.

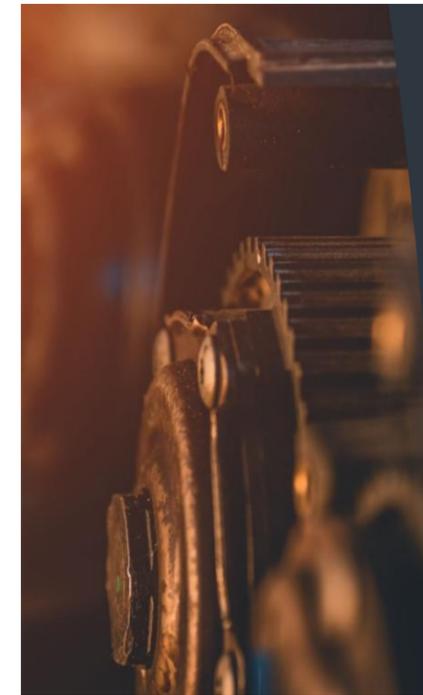

CUSTOM SOLUTIONS

- Marine
- Oil and Gas
- Construction
- Automotive
- Heavy Industrial
- Mineral Mining
- Factory Production
- Metal Machining

ERA SOLUTIONS

- FACTORY DIRECT
 - ERA BRANDED SOLUTIONS
 - LOGISTICS MANAGEMENT
 - DIRECT DELIVERY GLOBALLY
 - COST EFFECTIVE UNIT AND VOLUME
- PRICING
- CONTINUOUS CLIENT SUPPORT
 - CERTIFIED PRODUCT RANGE TO INTERNATIONAL STANDARDS

Lubricant solutions for your industry needs

TECHNICAL PERFORMANCE DATA FOR LITHIUM MOLYBDENUM DISULFIDE GREASE

WORKING CONE PENETRATION (1 – 10mm)

- Standard GB / T269
- #0 329
- #1 276
- #2 236

DROPPING POINT (DEGREES CELSIUS)

- Standard GB / T4929
- #0 193 C
- #1 196 C
- #2 206 C

WATER LOSS % (@ 79C PER HOUR)

- Standard SH / T0109
- #0 3.5%
- #1 1.25%
- #2 1.25%

EXTREME PRESSURE PERFORMANCE

- Standard SH / T0202
- 4 BALL MACHINE METHOD
- Pe VALUE = N
- #0 618
- #1 618
- #2 618

KEY APPLICATION AND GENERAL USAGE

- HEAVY PLANT
- HEAVY LOAD SURFACES
- GENERAL HP GREASE INDUSTRIAL
- GENERAL HP GREASE FOR MINING
- HEAVY DUTY GEAR BOXES
- HEAVY DUTY BEARINGS
- HEAVY DUTY COUPLINGS

GENERAL INDUSTRIAL APPLICATIONS

- MINING
- MINERAL DRILLING PLANT
- OIL AND GAS PLANT
- HEAVY PLANT SUPPORT
- HEAVY INDUSTRIAL

To find out more contact us directly.



CONTACT US

CONTACT US VIA WEB:

WWW.ERAOILFIELDSERVICES.COM

CONTACT US VIA EMAIL:

INFO@ERAOILFIELDSERVICES.COM
JIM.REID@ERAOILFIELDSERVICES.COM

CONTACT US VIA PHONE:

+66 8 4345 8730

