




WALL SAFE

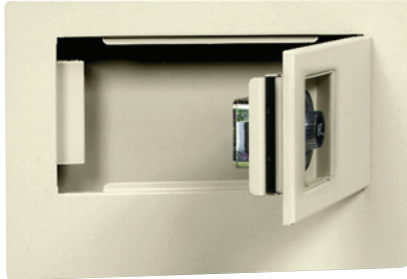

- Wall safe is constructed of heavy gauge steel with all locking and hinge points constructed of dual reinforced steel
- The door face (lip) and lock area are 14 gauge steel, with the interior box being 18 gauge steel
- True flush mounted with the hinge and lock below the surface
- Finished with a texture powder coat painting process in neutral sand colour
- Combination lock is a 3-wheel zinc die cast safe lock
- Weight: 13 lbs
- Inside area: 475 cubic inches
- Inside dimensions: 3.75" x 8.5" x 14"
- Door opening: 11.5" x 5.5"
- Face: 10.75" x 16.25"
- Wall cut out 8.75" x 14.25"

MFG #	TYPE	EZ #
WS100C	Combo	035601

FILE CABINET SECURE LOCKING BARS



SLB44

- Security locking bar for file cabinets is quickly installed on steel or wood file cabinets, blueprint cabinets, or tool cabinets
- Made of heavy duty 1/2" x 1 1/2" channel steel

SLB44

- For 4-drawer cabinets
- Size: 51.5" length
- Weight: 6 lbs

SLB45

- For 5-drawer cabinets
- Size: 59.875" length
- Weight: 7 lbs

MFG #	DRAWERS	EZ #
SLB44	4	005178
SLB45	5	044529

CYLINDER PROTECTION



DG2


DG3

- DorGard II™ provides protection for lock cylinders on narrow stile aluminum doors
- Cast steel components create a "vault" around the cylinder, virtually eliminating the possibility of unauthorized entry by removal of the cylinder or cylinder plug
- Cast stainless steel face plate protects against drill attack
- Plug protector made of case hardened steel rotates freely in the face plate, protecting against forcible removal of the plug
- Affixed with hardened steel bolts through the door
- DorGard III™ has all the features above and includes a latch protection plate with security pin
- **DorGard II™ has been specified in the blueprints for banks in Canada!**

MFG #	CYLINDER	SIZE	FINISH	EZ #
DG2AXS10	1"	1.5"W x 4.5"H	Silver	061703
DG2BXS10	1-1/8"	1.5"W x 4.5"H	Silver	061709
DG3APS10	1"	3"W x 8.625"H	Silver	061705



MORTISE DEADBOLT

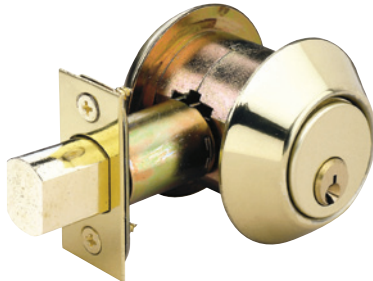

45 1 4 04 03

- Heavy duty cylinder housing, reinforced free turning collars
- Cylinders are retained by set screws, allen wrench is furnished
- Armored front shields set screws, solid brass trim
- Uses standard mortise cylinder with Adams Rite type cam
- Fits doors from 1-3/8" to 1-3/4", thicker doors use longer cylinders
- 1" throw bolt with 2 hardened steel pins

MFG #	FINISH	KEYWAY	EZ #
SINGLE CYLINDER DEADBOLT			
45 1 4 04 03 5 2 5 WA KD	Brass	Weiser	061563
45 1 4 04 26D 5 2 5 SC KD	Satin Chrome	Schlage	061570
45 1 4 04 26D 5 2 5 WA KD	Satin Chrome	Weiser	061564
DOUBLE CYLINDER DEADBOLT			
45 2 4 04 26D 5 2 5 SC KD	Satin Chrome	Schlage	061574
45 2 4 04 26D 5 2 5 WA KD	Satin Chrome	Weiser	061567

REPLACEMENT BOLTS & FACEPLATES



4500



4510



4540
4550

- Replacement bolts and faceplates for 4500 series deadbolts

MFG #	TYPE	BACKSET	EZ #
4500 26D5000	Standard	2-3/8"	035909
4510 26D5001/5012	Standard	2-3/4"	008854
4540 26D 5014	Drive-In	2-3/8"	008857
4550 26D 5001	Drive-In	2-3/4"	008858

RIM LOCKS



220 53 51



530 53 41




535 53 41

- Door thickness: 1-1/4" to 2-1/4"
- Completely reversible
- **220 53 51**: Has latch hold back function
- **530 & 535**: Jimmy & pry proof rim locks

MFG #	TYPE	BACKSET	EZ #
220 53 51	Night Latch	2-3/8"	102960
530 53 41	Single Cylinder Jimmyproof	2-1/2"	040612
535 53 51	Double Cylinder Jimmyproof	2-1/2"	007332

FILE CABINET BARS



- Offers protection to both lateral and vertical file cabinets to secure sensitive documents
- Install by attaching the clevis pins to the cabinet
- Lock by sliding bar over clevis pins and securing with padlocks
- Accepts padlock with 3/8" shackle diameter or less
- Stocked in black

MFG #	DRAWERS	EZ #
F2503 B	3	035647
F2504 B	4	035648

SWING AWAY FILE CABINET BARS



FCB4

- The OEM swing away file bar is fully reversible and is constructed of a heavy 16 gauge formed steel
- Chrome plated to provide a pleasing look
- Securely locked with a padlock

MULTI-POINT LOCKING DESIGN

The red inner slide bar interlocks with the specially designed locking lug hinge at each drawer opening to engage bar in locked position.

SPRING-OPEN ACTION

A slight upward motion of the red inner slide bar releases all lock points, permitting the built-in spring loaded hinge to swing bar clear of drawer openings. Engineered to give sufficient clearance for unrestricted access to adjacent files when locked or unlocked.




NO STORAGE - ACCIDENT - DAMAGE PROBLEM


Since file cabinet bars become an integral part of the file cabinet, and swing clear of drawer openings, they solve the problem of storing heavy bars in the office.

SIMPLE INSTALLATION

Installed with sheet metal screws or pop rivets. Whichever method is used, the integrity of the fastener is protected, since the points of attachment are completely covered by the bar in the closed position, effectively preventing surreptitious entry. The bar can be installed without opening the file cabinet or disturbing its' contents, all in a matter of minutes.



BAR IN UNLOCKED POSITION



BAR IN LOCKED POSITION

MFG #	DRAWERS	LENGTH	EZ #
FCB1	1	11"	036437
FCB2	2	21-1/2"	036438
FCB3	3	33-1/2"	036439
FCB4	4	45"	036440
FCB5	5	56"	036441