


# Kluge ComFold Automatic Folding & Gluing Systems

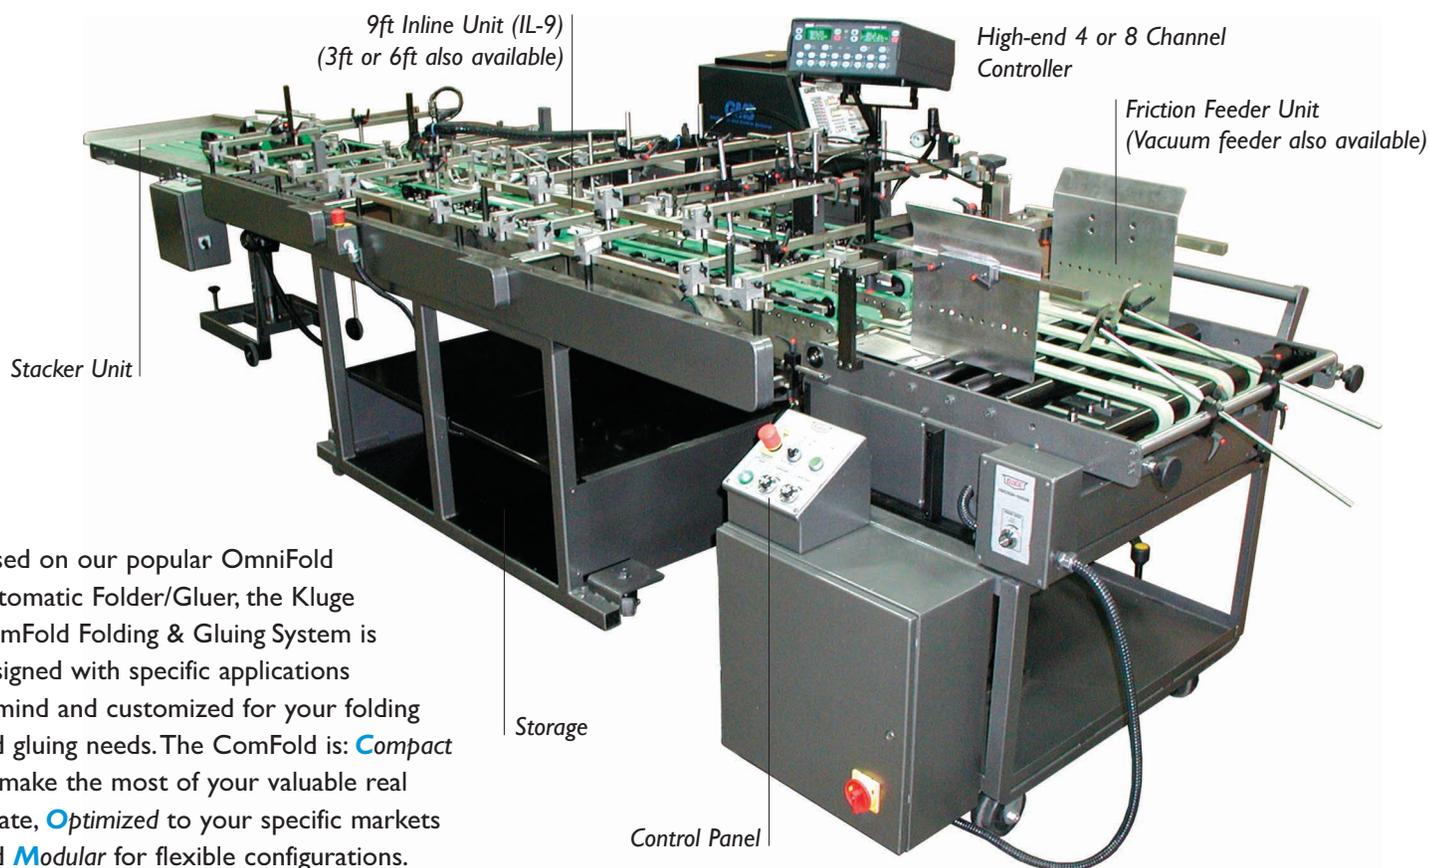

Based on our popular OmniFold Automatic Folder/Gluer, the Kluge ComFold Folding & Gluing System is designed with specific applications in mind and customized for your folding and gluing needs. The ComFold is: **C**ompact to make the most of your valuable real estate, **O**ptimized to your specific markets and **M**odular for flexible configurations.

## Modules and features

- Friction Feeder - Stock is fed from the bottom of the pile using sheet separator calipers and belts
- Vacuum Feeder - Includes dual vacuum wheels and blow pipes. Tool-less technology allows for simple manifold position adjustment.
- Electrical Controls - From the control panel, the user can operate the start, stop, jog and speed controls of all modular sections
- High-end 4 or 8 Channel Controller - Used to operate a variety of devices such as hot or cold glue and taping heads
- 3ft (IL-3), 6ft (IL-6) and 9ft (IL-9) Inline Units - Kluge Inline Units provide additional converting length. This feature provides the base unit to which accessories can be fixed.
- Stacker Unit - Compresses, counts & batches finished product
- Fold Hook Kit - For various auto-lock bottom applications
- Multiple Friction Fed Tipping and Placing Options
- High-speed Automatic Tape Head
- Airgate Folding Kit
- 18" and 33" Top Belt Drives
- Hot, Cold and Fugitive Glue Systems
- CE Compliance Package

## Common applications

- **Cartons:** Standard side seam cartons, cartons with internal integrated partitions, tuck top, auto-lock bottom, very small cartons and very narrow cartons
- **Media and Mailing:** CD/DVD jackets, sleeves, wallets, and other carriers, with or without tape, small return envelopes, fold-over reply cards and greeting cards sealed with fugitive glue or velcro
- **Tipped and Inserted Products:** Cartons created around preconverted items, CD/DVD carriers created around CDs and other items, products created around tipped-on items such as credit/gift cards and postcards using fugitive glue

## ComFold Automatic Folder/Gluer Specifications

Average Length (approx.)	23' - 27' (7010 mm - 8230 mm)
Width	72" (1830 mm)
Height	72" (1830 mm)
Operating Speed	450 fpm
Maximum Sheet Size	29"w x 32" (740 mm x 820 mm)
Minimum Sheet Size	5.5"w x 5.5" (140 mm x 140 mm)
Stock Range	.006 - .024 (200 - 500 gsm) coated/uncoated
Electrical	220-230V, single phase, 40amp
Air	90 psi @ 15 cfm

Brandtjen & Kluge, Inc., 539 Blanding Woods Road, St. Croix Falls, WI 54024  
Toll-free in U.S./Canada: (800) 826-7320 or (715) 483-3265 | sales@kluge.biz

ComFold is a registered trademark of Brandtjen & Kluge, Inc.

© 2007 Brandtjen & Kluge, Inc.

COM188

**KLUGE®**