


SC MOBILE WASH SKID

SC SERIES: DIESEL HEATED, GAS OR DIESEL ENGINE

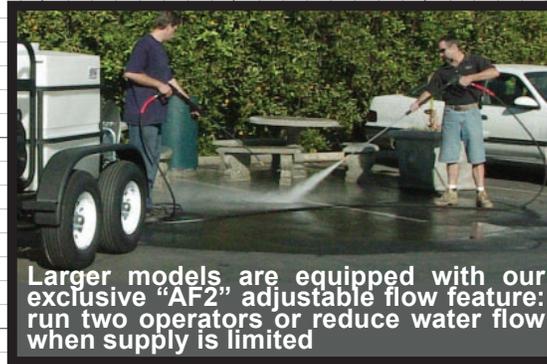

DESIGNED FOR THE NEEDS OF A CLEANING PROFESSIONAL

HYDROMTEK.US

MOBILE WASH SKID

SELF CONTAINED - HOT/COLD WATER: with on-board 3000w generator

SC
SERIES

■ Rugged "Pro-TECT-it" Frame:

Hydro Tek's unique "Pro-TECT-it" frame of 1/4", heavy gauge steel, with durable electrostatically applied powder coat finish.

■ Stainless Steel Panels:

These rugged and durable panels offer lifetime corrosion resistance and protection of your valuable investment from the harshest environments. Keeps your machine looking like new for years to come.

■ Heating System:

Schedule 80 coil. Rugged construction suitable for "over the road use" works in harmony with the double wall stainless steel, ceramic insulated housing. Virtually indestructible construction and industry leading performance — years of uninterrupted, worry free service.

■ Industrial Engines:

Efficient OHV gas engines with electric key start, low oil shutdown, and cast iron cylinder for maximum duty and performance. Some models equipped with a durable, water-cooled diesel engine with key-switch shutdown, for enhanced longevity and single fuel source.

■ Fuel Tanks:

Heavy Duty "roto-molded" rust free fuel tanks with fuel filter to protect against contaminated fuel. Extended run time (up to 8hrs.) eliminates interruptions. High capacity 8 gallon gas and 18 gallon diesel fuel tank decrease refueling and operator down time.

■ Total Relief Unloader - Remote Mounted:

Flow sensitive unloader allows pressure to build up gradually as trigger gun is activated eliminating "pressure spikes" and improving operator control and safety. When the gun is released, entire system pressure is relieved, enhancing system life and eliminating engine starting problems. The unloader is panel mounted eliminating heat failure and vibration. Balanced regulating unloader on 2-gun and 4000psi systems.

■ NEMA4- Water Tight Control Panel:

ETL certified to UL1776 Class 2, for use in wash-down area, exceeding industry standards. Special Hydro Tek control box features easy to use controls and provides instant access to electronics.

■ 2 Gun Compatible:

(Refer to specifications chart on right for available models)

Allows the operator to operate two pressure guns simultaneously, creating a multi-purpose machine, increasing efficiency and time. Unique split flow design balances pressure spikes. The adjustable flow feature also allows the operator to conserve water when needed

■ 110v Diesel Fired Burner with On-Board 3000 watt Generator:

Provides automatic, high intensity ignition and reliable power for the heating system. Supplemental power outlets from the generator (GFCI Protected) offer the operator additional electrical power to run lights or accessories. (D12 models have an efficient 12V burner system that offers and economical alternative and still provides maximum burner performance - not compatible with auxiliary accessories)

■ Belt Driven Pump:

High torque, V-belt driven pump, low RPM, cooler and quieter operation for continuous duty performance.

■ More Standard Features:

- Burst disc technology for operator safety
- Adjustable thermostat
- Heavy duty gun and wand with nozzle storage and 50' hose
- Insulated quick couplers & 3 or more nozzles
- Hour meters are included on all diesel models

Unmatched Durability: The SC is a proven model manufactured and refined for over two decades.



Intertek



ETL Listed
Certified to UL 1776
Certified to
CAN / CSA B140.11

Specifications

Model	PSI	GPM	Temp.	CC	Engine
SC30005VH	3000	5.0	250° F	570	Vanguard Gas
SC30008HAF**	3000	7.8/2	200° F	630	Honda Gas
SC30009KAF**	3000	8.5/2	200° F	725	Kohler Gas
SC35005VC	3500	4.5	250° F	570	Vanguard Gas
SC35005VG	3500	4.7	250° F	570	Vanguard Gas
SC35006VG	3500	5.5	250° F	627	Vanguard Gas
SC35006KG	3500	5.5	250° F	725	Kohler Gas
SC35006HG	3500	5.5	250° F	630	Honda Gas
SC35008KAF**	3500	7.7/2	200° F	725	Kohler Gas
SC40006VAF*	4000	5.5	200° F	627	Vanguard Gas
SC40006HAF*	4000	5.5	200° F	630	Honda Gas
SC25009DAF**	2500	8.7/2	200° F	719	Kubota Diesel
SC30006D12+	3000	5.5	200° F	599	Kubota Diesel
SC30008DAF**	3000	7.6/2	200° F	719	Kubota Diesel
SC35006D12+	3500	5.5	200° F	599	Kubota Diesel
SC35006DAF*	3500	5.5	200° F	599	Kubota Diesel
SC40005DAF*	4000	5.0	200° F	599	Kubota Diesel
SC40006D12+	4000	5.5	200° F	599	Kubota Diesel
SC50005D	5000	4.5	200° F	719	Kubota Diesel

* Two gun system compatible, **Includes two guns, wands, hoses

+ 12V diesel fired burner, no generator (additional 12V skids available in SS Series). Specifications may vary, consult factory for custom models

Dimensions: 51"x34"x41" without wheel kit

Optional Accessories:

Hour Meter, soap injection, stainless frame, custom skid color, Hydro Twister® concrete cleaner, wet sandblast, stainless hose reel, wheel kits, machine covers, trailers & tank skid systems, 12v AGM sealed battery

Hydro Vacuum Wastewater Recovery: The SC Series generator will power the Hydro Vacuum AZV system to capture, filter and recycle used wash water, saving time, money and the environment. (Honda powered or 12v models without generator not compatible, use a separate generator and an RZV)



Wheel kit options available

DISTRIBUTED BY:

HYDRO TEK .US
CLEANING EQUIPMENT MFG.

2353 Almond Avenue Redlands CA 92374
800.274.9376 fx909.799.9888 www.hydrotek.us

SC SERIES 12/12 HYDRO TEK ©