


Natural Daylight Solutions Ltd

NDS Ultra Barrel Vault

Glazing & Glazing bars thermally isolated from the kerb/upstand for minimal risk of condensation. Fully gasketted system for air-tightness. Full water management system.

System:	Thermally Broken
Finish:	Mill Finish (Standard) PPC Optional Extra
Rise:	Flexible confirmed during design
Part L:	Compliant
Glazing:	Solid or Multiwall Polycarbonate
U. Value:	1.05 – 1.91 (Multiwall & Triple glazed solid)
Width:	Min 800mm - Max 4000mm
Fragility:	Non-Fragile to ACR(M)001
Airtightness:	BS EN 1025
Weather tightness:	BS EN 14963
CE:	CE marked to BS EN 14963
Kerb/Upstand:	Available optional extra
Ventilation:	Available optional extra i.e. Full width, Dual Vents or singular part width

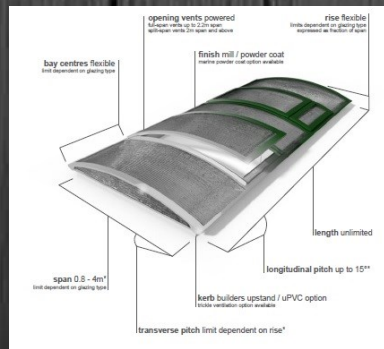

Suite 20, Fairfield Enterprise Centre
Lincoln Way
Fairfield Industrial Estate
Louth
Lincolnshire
LN11 0LS
T: 0333 772 0609
M: 07834 010311

www.naturaldaylightsolutions.com
sales@naturaldaylightsolutions.com

