

BC- REPLACING A GAS GAUGE

YOU MAY WANT TO CHANGE YOUR KPA GAS GAUGE FOR THE FOLLOWING REASONS:


1. YOU ARE CONVERTING ROASTER FROM LPG TO NG
2. YOUR GAUGE HAS STOPPED WORKING OR BEEN BLOWN OUT IF USING THE WRONG TYPW LPG REGULATOR

DEPENDING ON THE SIZE OF ROASTER YOU MAY BE ABLE TO REACH THE INSIDES FROM EITHER THE MOTOR ROOM UTILITY DOOR (BC-8 THRU 35) OR GOING UNDERNEATH ROASTER OR REMOVING IT FROM THE OUTSIDE CAREFULLY SO AS NOT TO DAMAGE THE GAS LINES


GENERALLY TOIL WILL NEED TWO 14MM WRENCHES AND A HEX METRIC KEY SET AS WELL AS GAS TAPE AND OR LEAK LOCK COMPOUND.

2.

USING TWO 14MM WRENCHES LOOSEN CAREFULLY THE GAUGE AND CONNECTORS FROM GAS LINE

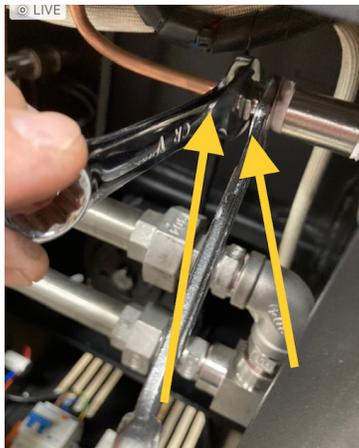

PREFERRED WAY TO REPLACE GAUGE IS TO ACCESS IT INTERNALLY

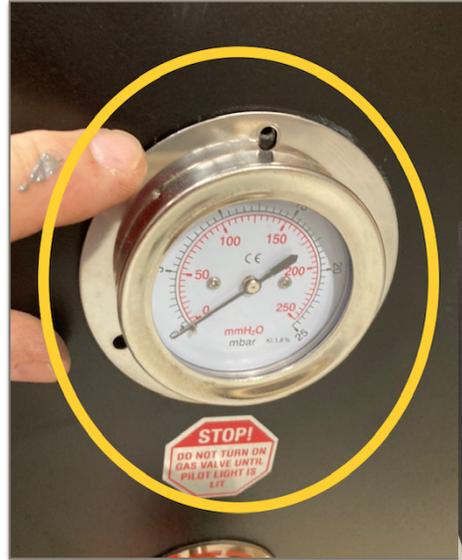

1.


WITH A METRIC HEX KEY SET REMOVE THE OUTER SCREWS ON GAUGE



BC- REPLACING A GAS GAUGE

3.

ONCE GAS LINE IS LOOSE THE
REMOVE GAUGE AND REMOVE ITS
CONNECTORS

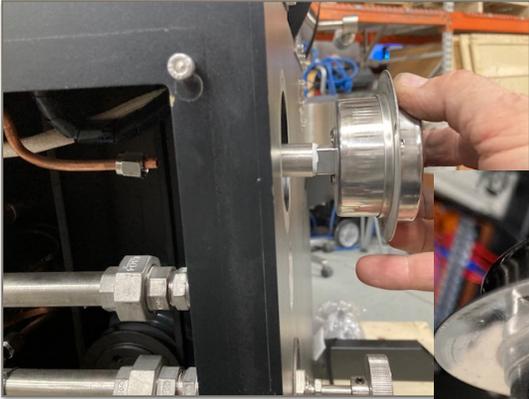

4.

ONCE CONNECTORS ARE REMOVED
PUT GAS TAPE ON NEW GAUGE
AND ANY OTHER THREADED
PARTS:



