



## Space Requirements

Dimensions (unit: mm)


### ■ bizhub C364(C284/C224)+PC-210(PC-110/PC-410/DK-510)+DF-624

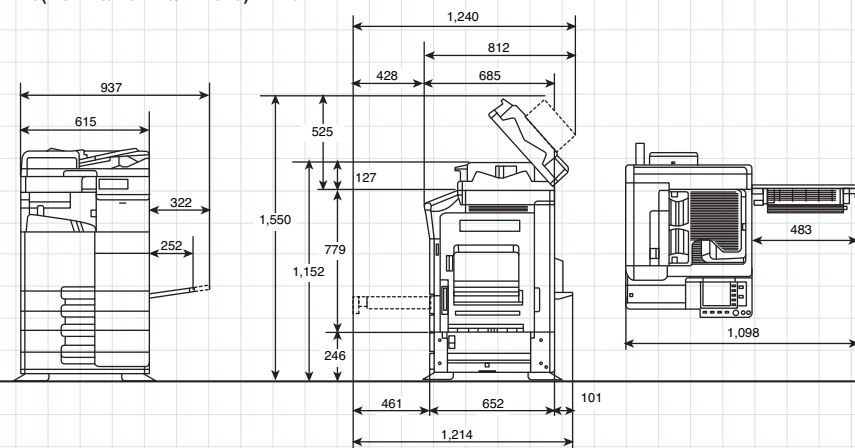

### ■ bizhub C364/C284/C224+DF-701+PC-210(PC-110/PC-410/DK-510)+FS-533+IC-414 (C364/C284 only)

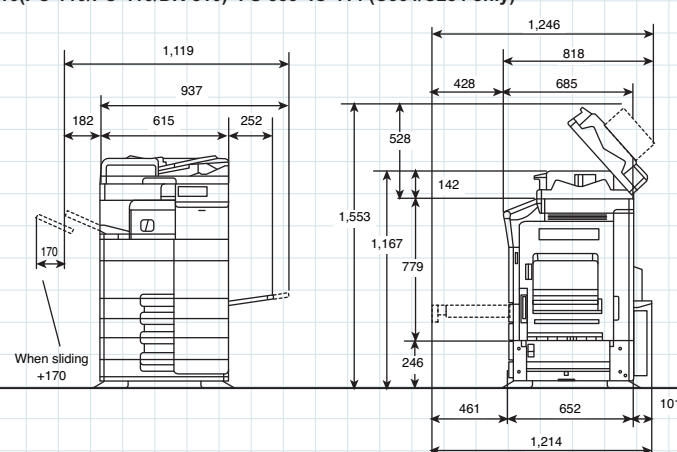


### ■ bizhub C364/C284/C224+PC-210(PC-110/PC-410/DK-510)+DF-624+MK-730+FS-534

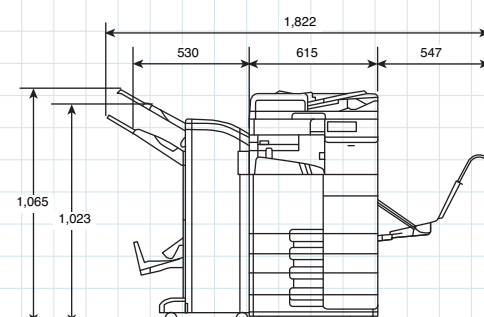

# bizhub C364/C284/C224 Spec Sheet

## System

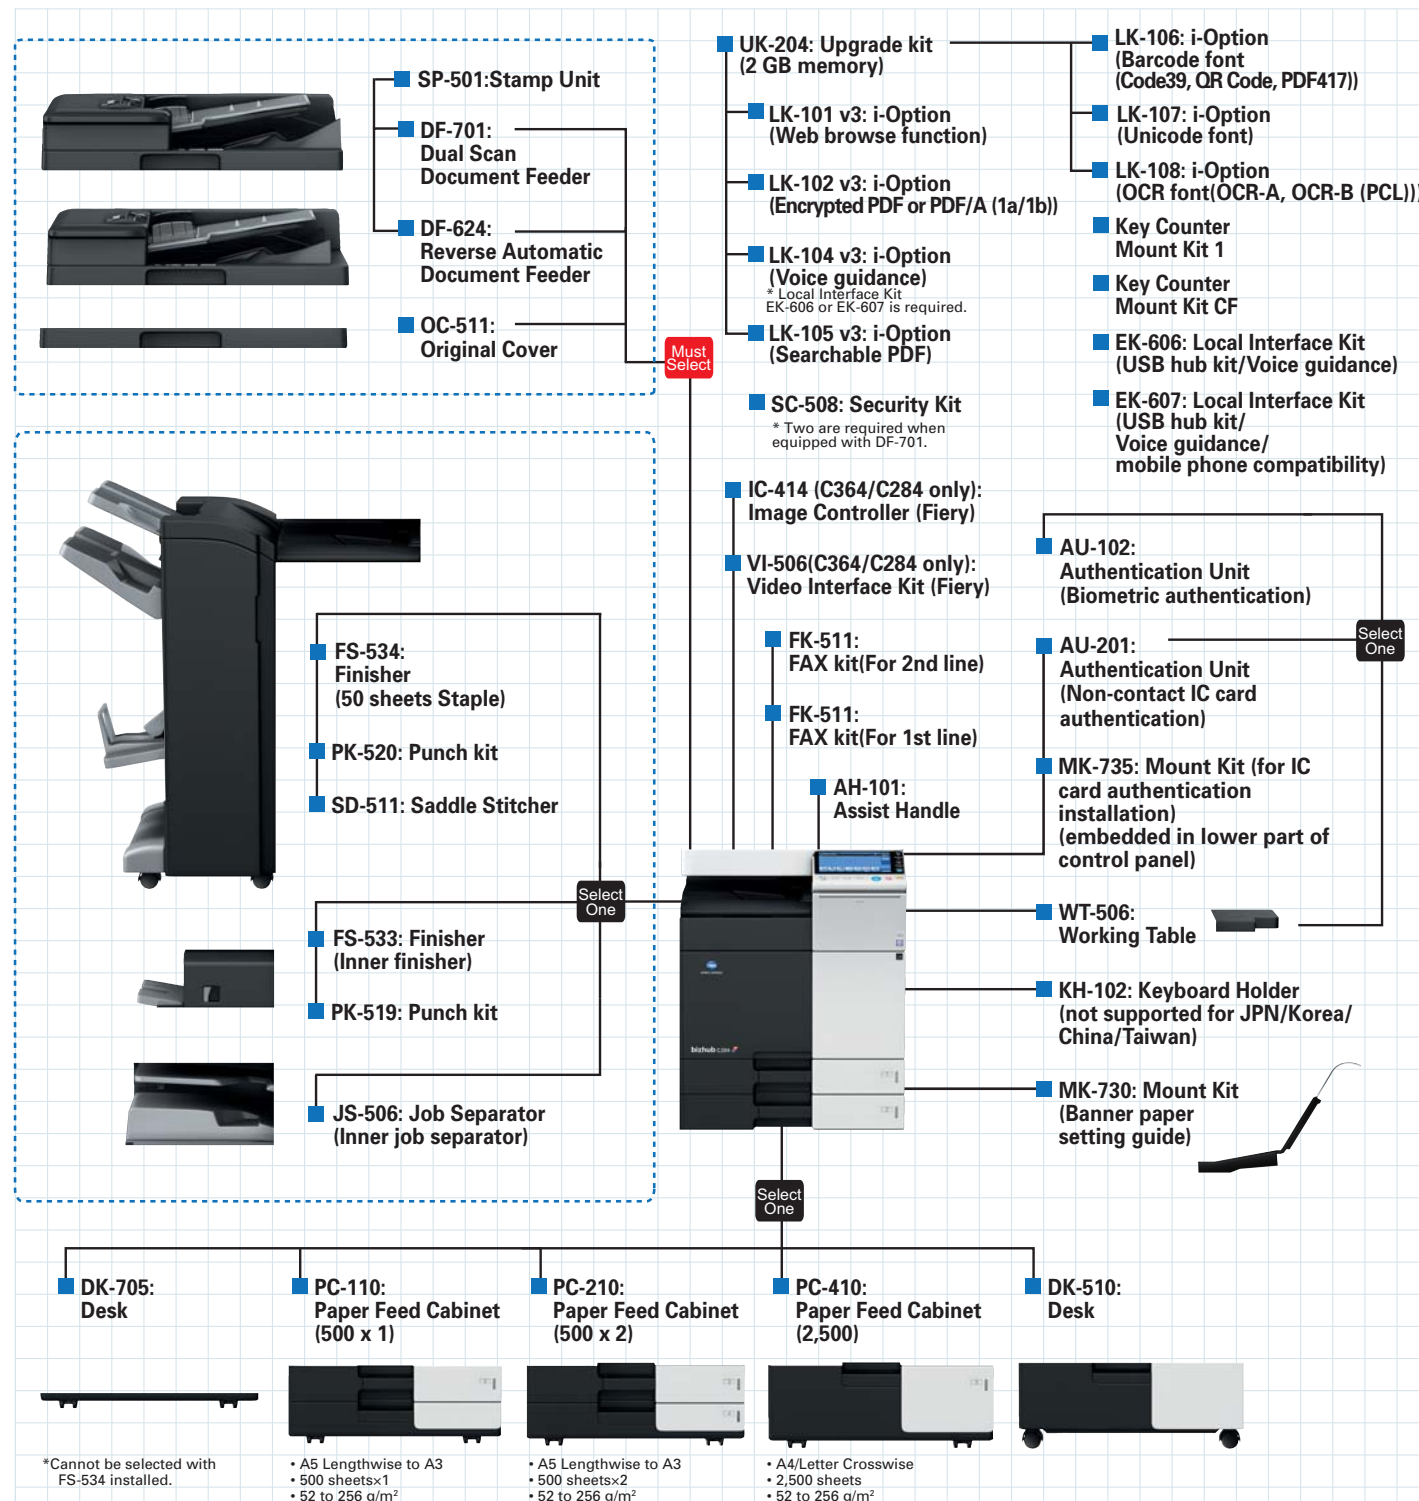

Note: Some options are not listed.

**Select One** One of the options may be selected (not mandatory).  
**Must Select** Once of the options must be selected (mandatory).

Giving Shape to Ideas

# Specifcations

## bizhub C364/C284/C224 General Specifications

		bizhub C364	bizhub C284	bizhub C224	
Type		Console Full Colour Printer/Copier/Scanner			
Colour Support		Full Colour			
Resolution	Scan Print	Main: 600dpi × Sub: 600dpi			
		Copy: Main: 600 dpi × Sub: 600 dpi / Print: Main; 1,200 dpi × Sub; 1,200 dpi			
Memory Capacity (Std./Max.)					
HDD					
Gradation					
Original Type					
Max. Original Size					
Output Size					
Image Loss					
Warm-Up Time					
*Warm-up time may vary depending on the operating environment and usage.					
*The time required to start printing when both the main power andsub-power switches are turned from OFF to ON. (23°C, std. voltage)					
*The time required to start printing when the main power switch isON and the sub-power switch is turned from OFF to ON. (23°C, std.voltage)					
First Copy Out Time					
*A4/Letter crosswise, full size, using the first tray, scanning from theoriginal glass surface.					
Copy Speed (A4/Letter Crosswise)		Colour/B&W: 36 ppm			
Copy Magnification		Fixed Same Magnification	1: 1±0.5% or less		
	Scaling Up	1: 1.154/1.224/1.414/2.000			
	Scaling Down	1: 0.866/0.816/0.707/0.500			
	Preset	3 types			
	Zoom	25 to 400% (in 0.1% increments)			
Paper Capacity (80 g/m²)	Lengthwise Crosswise Individual Settings	25 to 400% (in 0.1% increments)			
	Tray 1	500 sheets (up to A3)			
	Tray 2	500 sheets (up to SRA3)			
Multiple Bypass Tray		150 sheets (up to SRA3)			
Max. Paper Capacity (80g/m²)		3,650 sheets			
Paper Weight	Tray 1 / 2	52 to 256 g/m²			
	Multiple BypassTray	60 to 300 g/m²			
Multiple Copy		1 to 9,999 sheets			
Auto Duplex	Type	Non-Stack			
	Paper Size	Width: 100 to 320 mm, Length: 148 to 457.2 mm			
	Paper Weight	52 to 256 g/m²			
Power Requirements		AC220 to 240 V 8 A (50 to 60 Hz)			
Max. Power Consumption		1.58 kW or less			
Dimensions [W] × [D] × [H]		615 × 685 × 779 mm (24-1/4" × 27-1/2" × 30-3/4")			
Weight		Approx. 85 kg (187-1/2 lb)			
Space Requirements* [W] × [D]		937 × 1,214 mm (37" × 47-3/4")			

\*1) Without options, with paper trays pulled out, and multiple bypass tray, auxiliary tray

## Internet Fax(Standard)

Protocol	SMTP, POP
Connection Mode	Full-Mode
Sending Paper Size	A3, B4, A4
Recording Paper Size	Max. A3
Resolution	200 × 100 dpi, 200 × 200 dpi, 400 × 400 dpi, 600 × 600 dpi
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)
Colour	Support Colour Internet Fax
Format	Send: TIFF-F, Receive: TIFF-F Colour/Grey Scale: TIFF (RFC3949 Profile-C)

## IP Address Fax (FK-511 required)

Protocol Transmission	SMTP
Sending Paper Size	A3, B4, A4
Resolution	200 × 200 dpi, 400 × 400 dpi, 600 × 600 dpi
Format	Send: TIFF-F, Receive: TIFF-F Colour/Grey Scale: TIFF (RFC3949 Profile-C)

## Printer Specifications (Standard)

		bizhub C364	bizhub C284	bizhub C224
Type		Embedded		
CPU		MPC8536 1.0 GHz		
Memory		MPC8536 1.0 GHz		
HDD		MPC8536 800 MHz		
Print Speed		Shared with the copier		
Print Resolution		250 GB (Shared with the copier)		
PDL		Same as Copy Speed (when using the same original)		
Protocol		1,200 × 1,200 dpi		
Support OS		PCL5e/c, PCL6 (Ver. 3.0), XPS Ver. 1.0		
Fonts	PCL	TCP/IP, IPX/SPX (NDS support), SMB (NetBEUI), LPD, IPP1.1, SNMP, HTTP		
		Windows 2000 / XP / XP 64bit / Vista / Vista 64bit / 7 / 7 64bit / Server 2003 / Server 2003 64bit / Server 2003 R2 / Server 2003 R2 64bit / Server 2008 / Server 2008 64bit / Mac OS 9.2 / Mac OS X 10.2/10.3/10.4 (Power PC) / Mac OS X 10.5 (Power PC/Intel) / Mac OS X 10.6/10.7 (Intel) Linux		
	PS	4 Japanese fonts (HG Mincho L/HG P Mincho L/HG Gothic B/HGP Gothic B), 80 Roman fonts		
Interface		2 Japanese fonts (HG mincho L/HG Gothic B), 137 Roman Type1 fonts		
Interface		Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB 1.1, USB 2.0, USB Host		

## Image Controller IC-414 (For bizhub C364/C284 Only)(Optional) \* Optional Video Interface Kit VI-506 is required.

Type	Embedded Fiery E100
CPU	Intel Pentium E5300 2.60 GHz
Memory	2 GB
HDD	160 GB
Print Speed	Same as Copy Speed (when using the same original)
Print Resolution	600 dpi, 1,200 dpi
PDL	Adobe PostScript3 version3019, PCL6/PCL5 (for overseas only)
Protocol	Ethernet (Apple Talk, TCP/IP), HTTP/HTTPS, SSL/TLS for HTTPS, SMB, Port9100 (Bi-Directional), IPP, LDAP, IPV6, SNMP v3
Support OS	Windows XP / Server 2003 / Vista / Server 2008 / Server 2008 R2 64bit / 7 Mac OS X 10.4.11, 10.5.x, 10.6.x
Fonts	Adobe PS 138 Roman fonts, Agfa PCL 80 Roman fonts and 1 bitmap font, 2 Japanese fonts (Morisawa) (for JPN only), Additional PCL 35 fonts, Euro Currency Resident Font
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB

## Scanning Specifications (Standard)


Type	Full-Colour Scanner		
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)		
Driver	TWAIN Driver, HDD, TWAIN Driver		
Protocol	TCP/IP, FTP, SMB, SMTP		
Scanning Speed	Colour/B&W: 80 opm --- DF-624(300dpi, A4/Letter Crosswise) Colour/B&W: 160 opm --- DF-701(300dpi, A4/Letter Crosswise)		
Scanning Size	Max. A3 (11" × 17")		
Output Format	TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, PPTX, Searchable PDF, PDF/A, Linearised PDF		
Scanning Resolution	Push	200dpi/300dpi/400dpi/600dpi	
	Pull	100dpi / 200dpi / 300dpi / 400dpi / 600dpi	
Main Functions	Scan to E-Mail, Scan to FTP, Scan to BOX (HDD), Scan to PC (SMB), Network TWAIN, Scan to WebDAV, Scan to Me, Scan to Home, Scan to USB, Scan to Scan Server, Scan to Web Service (WSD-Scan), Device Profile for Web Services (DPWS)		
Other Functions	Multi-Method Send, Authentication at the time of E-Mail send (SMTP authentication, POP before SMTP), S/MIME, Annotation		

## Fax Kit FK-511 (Optional)

Communication	Super G3		
Compatible Lines	Public Switch Telephone Network, Private Branch Exchange, Fax Communication Line		
Line Density	G3 (8 dot/mm × 3.85 line/mm, 600 × 600 dpi)		
Modem Speed	2.4 to 33.6 kbps		
Compression	MH/MR/MMR/JBIG		
Sending Paper Size	Max. A3 (Long Length Support: Max.1,000 mm)		
Recording Paper Size	Max. A3 Long Length Max. 1,000 mm --- following the page division ---		
Transmission Speed	Less than 3 sec. (A4, V.34, 33.6 kbps, JBIG)		
Scanning Speed	55 opm (A4/Letter, 600 dpi)		
Memory	Shared with the copier		
Number of Abbr. Dials	2,000		
Number of Program Dials	400		
Number of Group Dials	100		
Sequential Multiple Station Transmission	Max. 600		

# Specifcations

## Reverse Automatic Document Feeder DF-624 (Optional)

Type	Circulatory duplex system		
Support Paper Size	A3 to A6 Lengthwise, 11" x 17" to 5-1/2" x 8-1/2", Foolscap (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13"), 8K, 16K		
Mixed Size	Support		
Original Set	Centre guide		
Resolution	600dpi support		
Support Paper Weight	Simplex: 35 to 128 g/m <sup>2</sup> Duplex/Mixed Original: 50 to 128 g/m <sup>2</sup> FAX Mode: 35 to 128 g/m <sup>2</sup> (Simplex), 50 to 128 g/m <sup>2</sup> (Duplex)		
Paper Capacity	Max. 100 sheets (80 g/m <sup>2</sup> )		
Productivity (A4/Letter Crosswise)	Simplex	Copy: Colour/B&W: 55 opm (600 dpi) Scan: Colour/B&W: 80 opm (300 dpi)	
	Duplex	Copy: Colour/B&W: 26 opm (600 dpi) Scan: Colour/B&W: 37 opm (300 dpi)	
Power Requirements	Supplied from the MFP main body		
Max. Power Consumption	60 W or less		
Dimensions [W] x [D] x [H]	611.2 x 503.6 x 130 mm (24" x 19-3/4" x 5")		
Weight	Approx. 9 kg (19-3/4 lb)		

## Reverse Automatic Document Feeder DF-701 (Optional)

Type	Single pass simultaneous duplex system		
Support Paper Size	A3 to A6 Lengthwise, 11" x 17" to 5-1/2" x 8-1/2", Foolscap (8-1/2" x 13-1/2", 200 mm x 330 mm, 8-1/8" x 13-1/4", 8-1/2" x 13", 8-1/4" x 13", 8" x 13), 8K, 16K		
Mixed Size Original Set	Support		
Resolution	Centre guide		
Support Paper Weight	600 dpi support		
	Simplex: 35 to 163 g/m <sup>2</sup> , Duplex: 50 to 163 g/m <sup>2</sup>		
	Mixed Original: 50 to 128 g/m <sup>2</sup>		
	FAX Mode: 35 to 163 g/m <sup>2</sup> (Simplex), 50 to 163 g/m <sup>2</sup> (Duplex)		
Paper Capacity	Max. 100 sheets (80 g/m <sup>2</sup> )		
Productivity (A4/Letter Crosswise)	Simplex	Copy: Colour/B&W: 55 opm (600 dpi) Scan: Colour/B&W: 80 opm (300 dpi)	
	Duplex	Copy: Colour/B&W: 110 opm (600 dpi) Scan: Colour/B&W: 160 opm (300 dpi)	
Power Requirements	Supplied from the MFP main body		
Max. Power Consumption	74.5 W or less		
Dimensions [W] x [D] x [H]	611.2 x 503.6 x 130 mm (24" x 19-3/4" x 5")		
Weight	Approx. 12 kg (26-1/2 lb)		

## Finisher FS-533 (Optional)

Type	Finisher		
Support Paper Type		Thin paper/Plain paper (52 to 90 g/m²), Thick paper (91 to 300 g/m²), Transparency, Postcard (JPN only), Envelope, Label sheet, Letterhead paper, Long length paper, Tabpaper	
Support Paper Size		SRA3 to A5, B6 Lengthwise, A6 Lengthwise Thick paper, Foolscap* (8-1/2" × 13-1/2", 200 mm × 330 mm, 8-1/8" × 13-1/4", 8-1/2" × 13", 8-1/4" × 13", 8" × 13), 8K, 16K, Long Length Paper (210 × 457.3 mm to 297 × 1,200 mm) * Set by Customer engineer	
Mode		Sort, Group, Offset Sort, Offset Group, Staple	
Stacking Capacity		500 sheets (52 to 90 g/m², A4 Lengthwise or smaller) 250 sheets (52 to 90 g/m², B4 or larger) 10 sheets (91 to 300 g/m², special paper)	
Staple Capacity		50 sheets (52 to 90 g/m², A4 Lengthwise or smaller) 30 sheets (52 to 90 g/m², B4 or larger) 2 sheets (91 to 209 g/m², as cover pages)	
Power Requirements		Supplied from the MFP main body	
Max. Power Consumption		40 W or less	
Dimensions [W] × [D] × [H]		472.5 × 583.5 × 194.7 mm (18-1/2" × 23" × 7-3/4")	
Weight		Approx. 12 kg (26-1/2 lb)	

## Finisher FS-534 (Optional)

Type	Finisher		
Support Paper Type		Thin paper/Plain paper (52 to 90 g/m²) , Thick paper (91 to 300g/m²), Transparency, Envelope, Label sheet, Letterhead paper, Long length paper, Tab paper	
Support Paper Size		SRA3 to A5, B6 Lengthwise, A6 Lengthwise Thick paper, Foolscap* (8-1/2" × 13-1/2", 200 mm × 330 mm, 8-1/8" × 13-1/4", 8-1/2" × 13", 8-1/4" × 13", 8" × 13), 8K, 16K, Long Length Paper (210 × 457.3 mm to 297 × 1,200 mm) * Set by Customer engineer	
Mode		Sort, Group, Offset Sort, Offset Group, Staple	
Stacking Capacity	Output tray 1 (Sub tray)	200 sheets (52 to 90 g/m²) 20 sheets (91 to 300 g/m², special paper)	
	Output tray 2 (Main tray)	3,000 sheets (52 to 90 g/m², A4 Lengthwise or smaller, B5 or larger) *2,000 sheets when SD-511 is installed 1,500 sheets (52 to 90 g/m², B4 or larger) 500 sheets (52 to 90 g/m², A5 or smaller) 20 sheets (91 to 300 g/m², special paper)	
	Output tray 3 (Relay Unit top surface)	100 sheets (52 to 90 g/m²) 20 sheets (91 to 300 g/m², special paper)	
Staple Capacity		50 sheets (Plain Paper 52 to 90 g/m²) 48 sheets (Plain paper 52 to 90 g/m²) + 2 sheets (Thick paper 91 to 209 g/m²) 30 sheets (Thick paper 91 to 120 g/m²) 15 sheets (Thick paper 121 to 209 g/m²)	
Power Requirements		Supplied from the MFP main body	
Max. Power Consumption		56 W or less	
Dimensions [W] × [D] × [H]		528 × 641 × 1,023 mm (20-3/4" × 25-1/4" × 40-1/4")	
Weight		Approx. 40 kg (88-1/4 lb)	