


**The Brightest and Toughest T5-4 Lamp Fluorescent Fixture on the Market**

**Description**


- 95.5% Efficiency Miro-4 Super Reflector for T5-4 Lamp.
- Durable .063 Aluminum is Tog-Locked for maximum strength. (No assembly required).
- Fixture is well vented for maximum heat dissipation and longer electrical component life.
- Knockouts for end wiring and occupancy sensors. Optional Gripper hanging system.
- Wire guard or Acrylic lens will take the hit from balls and hockey pucks.
- Life time warranty on fixture housing.
- Size 4" High x 18 5/8" Wide x 48 1/2" Long x .063 Aluminum or 22 Gage Galvanized Steel.

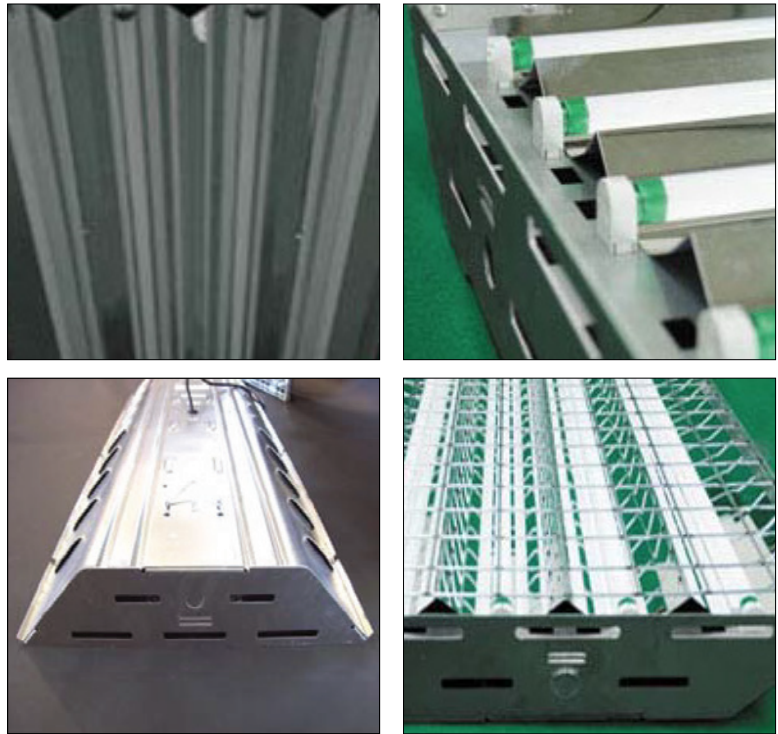

**BL-T5-4L Ordering Information: (Example: BL-T5-4L/277/A/W6/L7/15P/ACL/LI/GHK6)**

Lamp	Specify Voltage	Specify Fixture	Whip & Plug	Options
4 4L	120 to 480	Steel	6' W6	Lamp Included LI
6 6L		Aluminum	9' W9	Wire Guard WG
8 8L			12' W12	Acrylic Lens ACL
			20' W20	Pendent Mount Bracket PM
			15 Amp 125V L5-15P	Gripper Hanging Kit GHK
			15 Amp 277V L7-15P	6'
			20 Amp 480V L8-20P	8'
				10'
				12'

T5-4 Lamp IES File

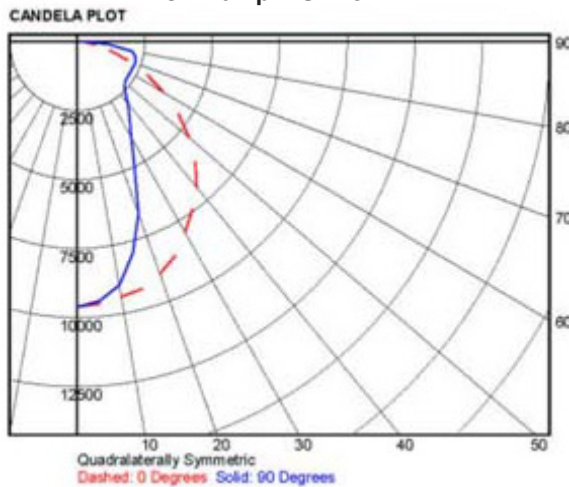

**SUMMARY DATA**

EFFICIENCY (Total):	95.5 %
EFFICIENCY (Downlight):	95.5 %
EFFICIENCY (Uplight):	0.0 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.24
SPACING CRITERION (90-Deg.):	0.81
LUMENS/LAMP:	5000
NO. OF LAMPS:	4
LUMINOUS OPENING:	RECTANGULAR
Width:	1.55 (Feet)
Length:	4.05
Height:	0.00
INPUT WATTS:	236
RP-1-83 VDT CONFORMANCE:	NON-CONFORM#

**ZONAL LUMEN SUMMARY**

Zone	Lumens	% Lamp	% Luminaire
0 - 30	6411.4	32.1	33.6
0 - 40	9508.4	47.5	49.8
0 - 60	14606.0	73.0	76.4
60 - 90	4503.8	22.5	23.6
0 - 90	19109.8	95.5	100.0
90 - 180	0.0	0.0	0.0
0 - 180	19109.8	95.5	100.0



**PATENTED**

[www.bestlights.com](http://www.bestlights.com)



**Fixture Warranty**  
 Best Lights, Inc. warranty fixtures to be free from defects in material and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing parts. Light bulbs and ballast on separate warranty.