



415 Pembroke Circle, Alpharetta, GA 30004

## Installation Guidelines

**Packaging** – check your product for all parts



Installation. (10010C, 10011, 10022, 10024) all others skip to step three)

**Step one** - Thread quick connect to supply line (longest supply line) do not cross thread, attach hose. (10010C, 10011, 10022, 10024)

Cross threading will cause leaking plumbers dope may be used



**Step two** – Pull on line to test engagement (10010C, 10011, 10022, 10024) Disconnect to install faucet.



**Step three** – Attach Hot (red) and Cold (blue) supply lines hand thread the supply line and gently tightened with a wrench.



**Step four** – Place Deck Gasket onto sink



**Step five** – Feed of the (hot and cold) lines through the (faucet hole 1 3/8 inch in diameter)


Note: Remove lock down nut prior to threading hoses.



**Step six** – Feed Water Lines Though Lock Down Nut (L) and Hand tighten to counter.



**Step seven** – Using Philips Head Screw Driver, tighten screws located on Lock Down Nut

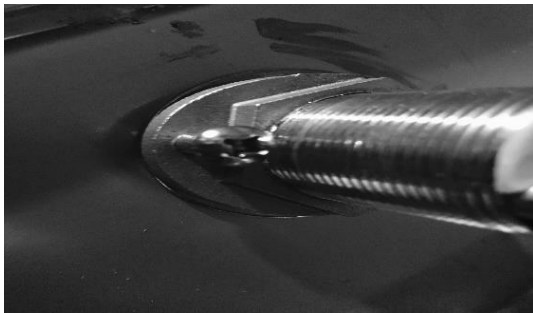

**Step eight** – Hand thread water lines to supply and gently tighten with wrench (Teflon tape may be used)



**Step Nine** – Reconnect the water line to the quick connect for the spray wand



**Step ten** – Attach Weight (I) on hose for spray wand at the lowest point on the supply line. (10010C, 10011, 10022, 10024)



## **TURN ON SUPPLY LINES AND TEST YOUR CONNECTIONS FOR LEAKS.....**

**Enjoy your new faucet!**

