


COMMERCIAL MOWER ATTACHMENT SERIES

INSTRUCTIONS D'TTACH MAINTENANCE JACK (DTMJ) *Hitch Not Included*

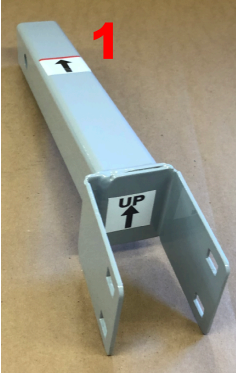

Assemble D'ttach Maintenance Jack

Install (1) Hitch Tube, in the up position onto the (2) Jack Assembly aligning to the "X" (3). Fasten using supplied carriage bolts and flange nuts with a 9/16 wrench.

***Note* Make sure to torque securely and Retorque after first use.**



Install D'ttach Maintenance Jack

Once Maintenance Jack is assembled, insert Maintenance Jack into existing D'ttach hitch


Remove (4) Snapper Pin to utilize the "drop leg". Reinsert Snapper Pin to closest available hole to eliminate quite a few inches of cranking.

Crank clockwise to raise and counter clockwise to lower.

****Always make sure hitch tube is securely torque to maintenance jack to avoid injury.****

COMPLETELY ASSEMBLED AND INSTALLED MAINTENANCE JACK

Hitch Pin not included with attachments. Hitch Pins sold with Hitches only. Replacement Hitch Pins Available for purchase.

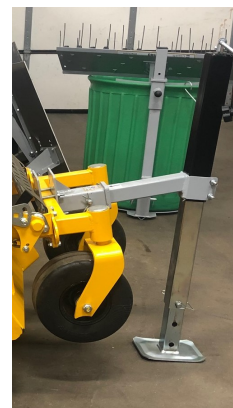

Visit www.dttach.com/support.html

for Product Support, IPL's, Product Literature, Instructions & Tutorial Videos

D'ttach MFG. 83-A Comsewogue Rd, E. Setauket, NY 11733 631-642-7445

Follow Us @dttachmfg



DTMJ INSTRUCTIONS.FS