



SHEERWEAVE®
BY PHIFER

STYLE
7700R / 7750R

RESIDENTIAL

7700R - BLACKOUT FABRIC
7750R - LIGHT-FILTERING FABRIC

WEAVING
EXCELLENCE
WITH
INNOVATION



Code	Color	SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind)	
		TS	RS	AS	TV	SINGLE 1/4 CL	INSULATING 1 HA
STYLE 7700R - BLACKOUT							
TB1	Crystal	0	70	30	0	0.24	0.19
TB2	Sand	0	57	43	0	0.31	0.23
TB3	Concrete	0	44	56	0	0.38	0.27
TB4	Chalk	0	59	41	0	0.30	0.23
TB5	Graphite	0	44	56	0	0.38	0.26
TB6	Pewter	0	22	78	0	0.50	0.32
TB7	Onyx	0	6	94	0	0.58	0.37



PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



MIF Seal of Approval



PVC FREE



SAFE USE



ENERGY SAVING



PHTHALATE FREE


TS = Solar Transmittance
RS = Solar Reflectance
AS = Solar Absorptance
TV = Visual Transmittance

SHGC = Solar Heat Gain Coefficient

1/4 CL = 1/4" Clear Glass
1 HA = 1" Heat Absorbing Glass

Fabrics Installed Internally
Zero-Degree Profile Angle

For additional performance values,
test references and technical
definitions visit us at phifer.com.

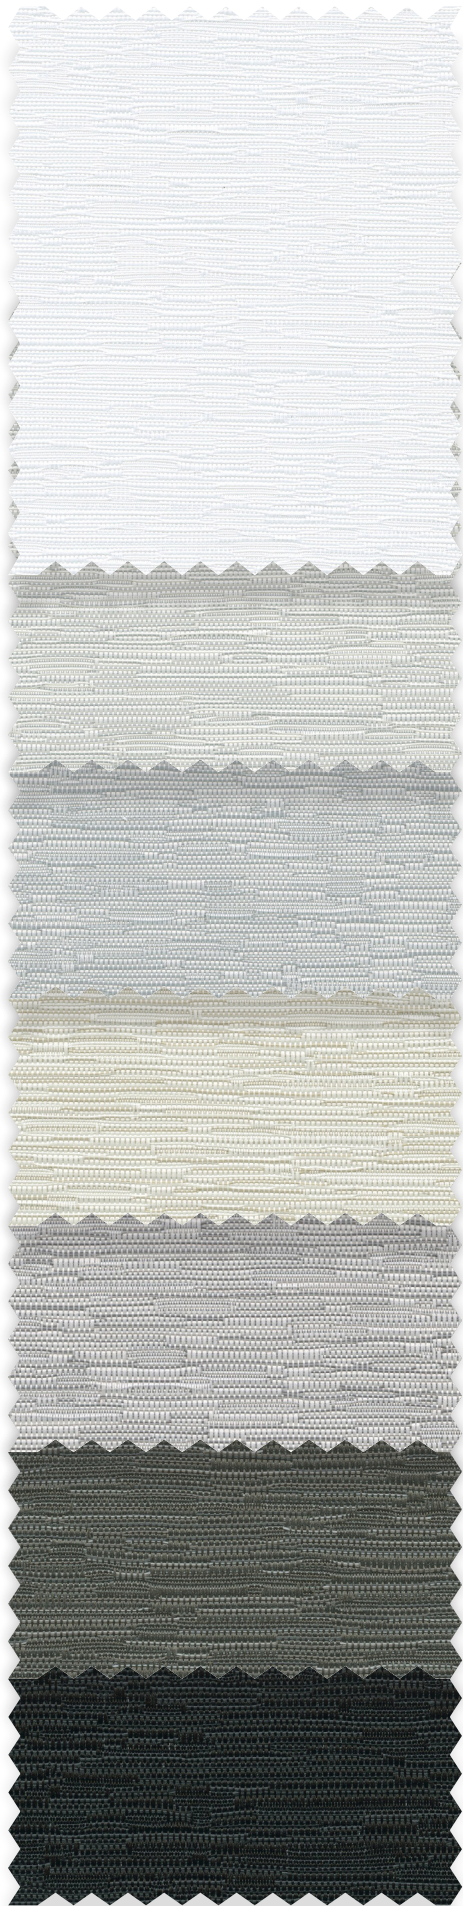

STYLE
7700R

TB1
Crystal

TB4
Chalk


TB3
Concrete

TB2
Sand

TB5
Graphite

TB6
Pewter

TB7
Onyx

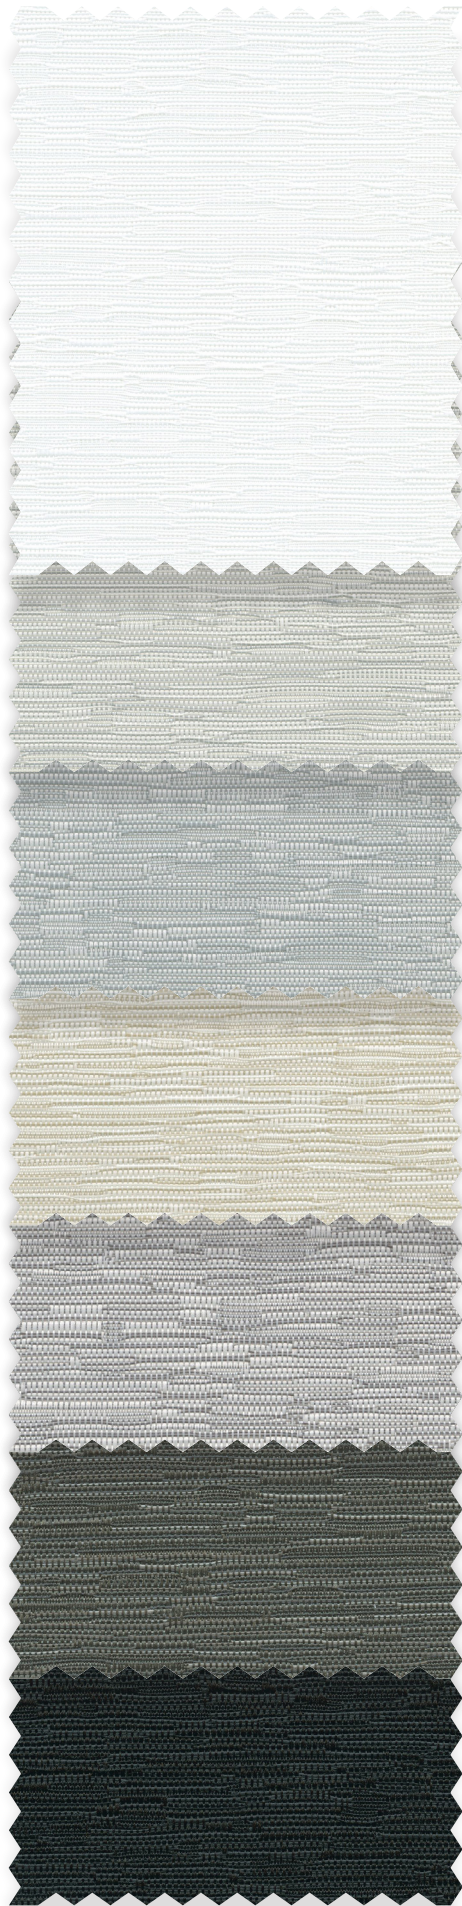

STYLE
7750R

TL1
Crystal

TL4
Chalk

TL3
Concrete

TL2
Sand

TL5
Graphite

TL6
Pewter

TL7
Onyx

STYLE 7700R / 7750R SPECIFICATIONS

Featuring a soft, textured pattern evoking the look of grasscloth, Style 7700R offers a PVC-free blackout option for total light blockage. Style 7750R filters natural light while maintaining the look of the face fabric of Style 7700R. A color-coordinated backing ensures the same neutral fabric color is shown toward both the interior of the room and glass.

These fabrics are suitable for roller shades, Roman shades and panel track systems and are ideal for residential use.

STYLE 7700R FIRE CLASSIFICATION California Technical Bulletin 117

STYLE 7250R FIRE CLASSIFICATION California Technical Bulletin 117 IBC Section 803.1.1 (Class A Rating)
 NFPA 101 (Class A Rating)

Fire classifications are subject to change. Please go to phifer.com for the most current information.

BACTERIA AND FUNGAL RESISTANCE ASTM G21 ASTM E 2180

ENVIRONMENTAL CERTIFICATION GREENGUARD GREENGUARD Gold
 Certified to these standards for low chemical emissions into indoor air during product usage

SAFE USE ANSI/WCMA A 100.1-2007 for lead content US Consumer Product Safety Commission Section 101
 RoHS/Directive 2002/95/EC

WARRANTY 5-year interior

UV PROTECTION Seal of Approval by the Melanoma International Foundation (MIF) for effectiveness in preventing sun damage to the skin or eyes

CLEANING INSTRUCTIONS Fabric should be regularly dusted/vacuumed as appropriate. If commercial spot cleaners are used, they must first be tested and allowed to dry on an inconspicuous area to ensure compatibility.

*Railroading this fabric is not recommended.
 Colors may vary slightly from swatch samples. All variations are within industry standards.*

STYLE	7700R	7750R
WIDTHS	118" 300 cm	118" 300 cm
ROLL LENGTH	22 Linear Yards 20 Linear Meters	22 Linear Yards 20 Linear Meters
COMPOSITION	100% Polyester with Acrylic Flocked Backing	100% Polyester with Acrylic Flocked Backing
MESH WEIGHT	13.6 oz/yd ² 461 g/m ²	8.8 oz/yd ² 298 g/m ²
FABRIC THICKNESS	0.028 in 0.71 mm	0.023 in 0.58 mm
OPENNESS FACTOR	Opaque	Light-filtering
ACOUSTICAL VALUE	NRC .05 / SAA .04	NRC .55 / SAA .57

PHIFER
 INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403-1700 USA
 Phone: 205.345.2120 • FAX: 205.391.0799
 Toll Free USA/Canada: 1.800.221.5497
phifer.com • ISO Registered



© SheerWeave is a registered trademark of PHIFER INCORPORATED.
 ™ UL, the UL logos and the UL mark are trademarks of UL LLC.
 Photo courtesy of Blind Design, South Africa
 © PHIFER INCORPORATED V21 110322 3038202