

POLETECTOR 360™ & 540XL SPECIFICATIONS & ORDERING INSTRUCTIONS

MATERIAL PROPERTIES

- Manufactured from 100% Polypropylene. 100% recyclable.
- Excellent resistance to organic solvents, degreasing agents, acids, alkali, organic solvents, and is stain resistant.
- Impact resistant
- Easily cleaned with environmentally friendly cleaners.
- Ultraviolet additive maintains color intensity and high visibility.
- Foam inserts give progressive resistance, offering soft protection for slight bumps, and more resistance when needed to absorb harder collisions.


ORDERING INSTRUCTIONS

1. Verify if Poletector can fit diameter of light pole base.
Poletector can cover round bases up to 24" and square bases up to 18" x 18". The Poletector 540XL covers 25" to 34" round or 24" square light pole bases.
2. Determine if you need a shorter, or taller unit. Standard unit is 4-rings high, 41.27".
3. Specify square or round pole. We will custom cut top opening to your specification. Cut out will be .125" larger than the size of the light pole.*
4. Chose color: Safety Yellow, Safety Blue, Imperial Blue, Red, Grey, Safety Orange, Architectural Brown, Black.




*Contractor is responsible for providing accurate dimensions to Simon Marketing Group at the time of ordering, or, you may cut the cover to fit the pole on site.

POLETECTOR MEASURING GUIDE

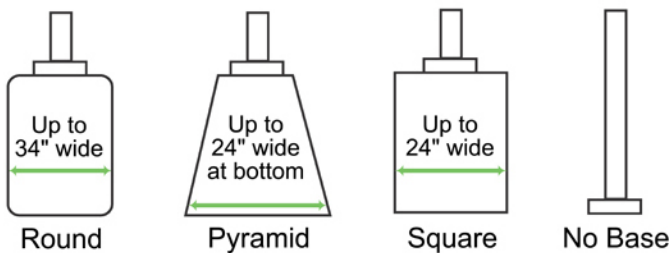

Poletector height equals top (3.27") plus each ring height (9.50"). Show below is 4-ring unit height of 41.27".

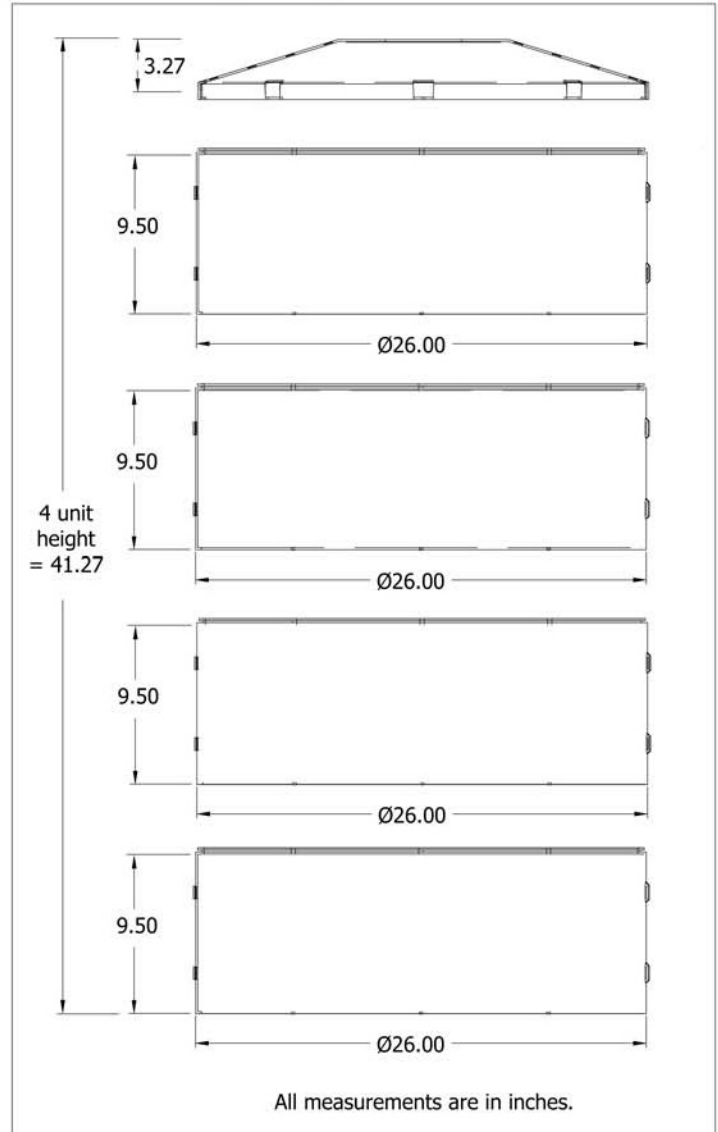

DIMENSIONS

	360	540XL
Height:	41.27" (4-ring unit)	41.27" (4-ring unit)
Outside diameter:	26"	35"
Inside diameter:	25.5"	34.5"
Wall thickness:	0.25" approx.	0.25" approx.
Weight:	25 lbs. (4-ring unit)	30 lbs. (4-ring unit)

CALL TO ORDER SHORTER OR TALLER UNITS



Simon Marketing Group, LLC
1405 White Oak Drive • Kalamazoo, MI 49008
248-855-6647

www.parkinglotsafety.com

