



STYLE

7500 / 7500R

7500 - BLACKOUT FABRIC

7500R - RESIDENTIAL  
BLACKOUT FABRIC

---

WEAVING  
EXCELLENCE  
WITH  
INNOVATION



Code	Color	SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind)	
		TS	RS	AS	TV	SINGLE 1/4 CL	INSULATING 1 HA
<b>STYLE 7500 - BLACKOUT</b>							
R13	Ice	0	68	32	0	0.24	0.20
R22	Midnight	0	68	32	0	0.24	0.20
R99	Midnight x2	4	9	87	0	0.57	0.36
S97	Orient x2	4	13	83	0	0.56	0.35
<b>STYLE 7500R - BLACKOUT</b>							
R44	Ice	0	68	32	0	0.24	0.20
R55	Midnight	0	68	32	0	0.24	0.20



PRODUCT CERTIFIED FOR  
LOW CHEMICAL EMISSIONS  
UL.COM/GG  
UL 2818



MIF Seal of Approval



STYLE 7500

TS = Solar Transmittance  
RS = Solar Reflectance  
AS = Solar Absorptance  
TV = Visual Transmittance

SHGC = Solar Heat Gain Coefficient

1/4 CL = 1/4" Clear Glass  
1 HA = 1" Heat Absorbing Glass

Fabrics Installed Internally  
Zero-Degree Profile Angle

For additional performance values,  
test references and technical  
definitions visit us at [phifer.com](http://phifer.com).

STYLE 7500

R13 Ice



R39 Cloud




R40 Porcelain



R17 Dune




R19 Stone




R41 Limestone



R97 Mist



R42 Nimbus



R43 Tundra



R20 Odyssey



R21 Orient



S97 Orient x2



R22 Midnight




R99 Midnight x2




STYLE 7500R RESIDENTIAL


R44 Ice

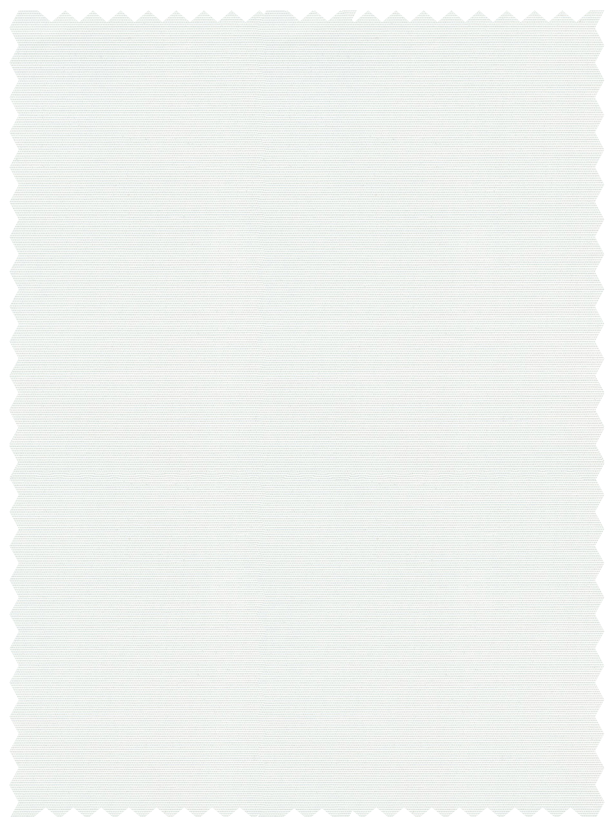

R45 Cloud




R46 Porcelain



R51 Dune




R52 Stone



R47 Limestone




R48 Mist



R49 Nimbus



R50 Tundra



R53 Odyssey



R54 Orient



R55 Midnight



# STYLE 7500 / 7500R SPECIFICATIONS

This attractive blackout fabric maintains high quality at an economical price. Style 7500 is presented in a classic range of neutral colors with a unique PVC-free composition and is ideal for commercial applications. SheerWeave Style 7500 is an excellent option when total light blockage is needed and all Style 7500 colors have an off-white backing.

New Style 7500R, a companion to the Style 7500 range, maintains the same look and feel as its namesake at substantial cost savings and is designed specifically for residential use where commercial fire certifications are not required.

<b>STYLE 7500 FIRE CLASSIFICATION</b>	California U.S. Title 19 (small scale)	NFPA 701 TM#1 (small scale)
	CAN/ULC-S 109 (large and small scale)	IBC Section 803.1.1 (Class A Rating)
	CAN/CGSB2-4.162-M80	BS 5867 Part 2 Type B Performance
	NFPA 101 (Class A Rating)	

<b>STYLE 7500R FIRE CLASSIFICATION</b>	California Technical Bulletin 117	IBC Section 803.1.1 (Class B Rating)
	NFPA 101 (Class B Rating)	

*Fire classifications are subject to change. Please go to [phifer.com](http://phifer.com) for the most current information.*

<b>BACTERIA AND FUNGAL RESISTANCE</b>	ASTM E2180	ASTM G21
---------------------------------------	------------	----------

<b>ENVIRONMENTAL CERTIFICATION</b>	GREENGUARD	GREENGUARD Gold
	Certified to these standards for low chemical emissions into indoor air during product usage	

<b>SAFE USE</b>	ANSI/WCMA A 100.1-2007 for lead content	RoHS/Directive 2002/95/EC
	US Consumer Product Safety Commission Section 101	

**WARRANTY** 5-year interior

<b>ACOUSTICAL PERFORMANCE</b>	NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with	
	ASTM C423-09a	

**UV PROTECTION** Seal of Approval by the Melanoma International Foundation (MIF) for effectiveness in preventing sun damage to the skin or eyes

**CLEANING INSTRUCTIONS** Fabric should be regularly dusted/vacuumed as appropriate. If commercial spot cleaners are used, they must first be tested and allowed to dry on an inconspicuous area to ensure compatibility.

*Railroading this fabric is not recommended.*

*Colors may vary slightly from swatch samples. All variations are within industry standards.*

STYLE	7500	7500R
<b>WIDTHS</b>	118" 300 cm	118" 300 cm
<b>ROLL LENGTH</b>	30 Linear Yards 27.4 Linear Meters	30 Linear Yards 27.4 Linear Meters
<b>COMPOSITION</b>	100% Polyester with Acrylic Coating	100% Polyester with Acrylic Coating
<b>MESH WEIGHT</b>	12.14 oz/yd <sup>2</sup> 412 g/m <sup>2</sup>	10.7 oz/yd <sup>2</sup> 363 g/m <sup>2</sup>
<b>FABRIC THICKNESS</b>	0.016 in 0.40 mm	0.012 in 0.305 mm
<b>OPENNESS FACTOR</b>	Opaque	Opaque
<b>ACOUSTICAL VALUE</b>	NRC .00 / SAA .03	NRC .00 / SAA .03

**PHIFER**  
INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403-1700 USA  
Phone: 205.345.2120 • FAX: 205.391.0799  
Toll Free USA/Canada: 1.800.221.5497  
[phifer.com](http://phifer.com) • ISO Registered



© SheerWeave is a registered trademark of PHIFER INCORPORATED.  
™ UL, the UL logos and the UL mark are trademarks of UL LLC.  
Photo courtesy of Blind Designs, South America.  
© PHIFER INCORPORATED V21 021421 3033844