


GWX.AS2 Plus

Weigh price labeller

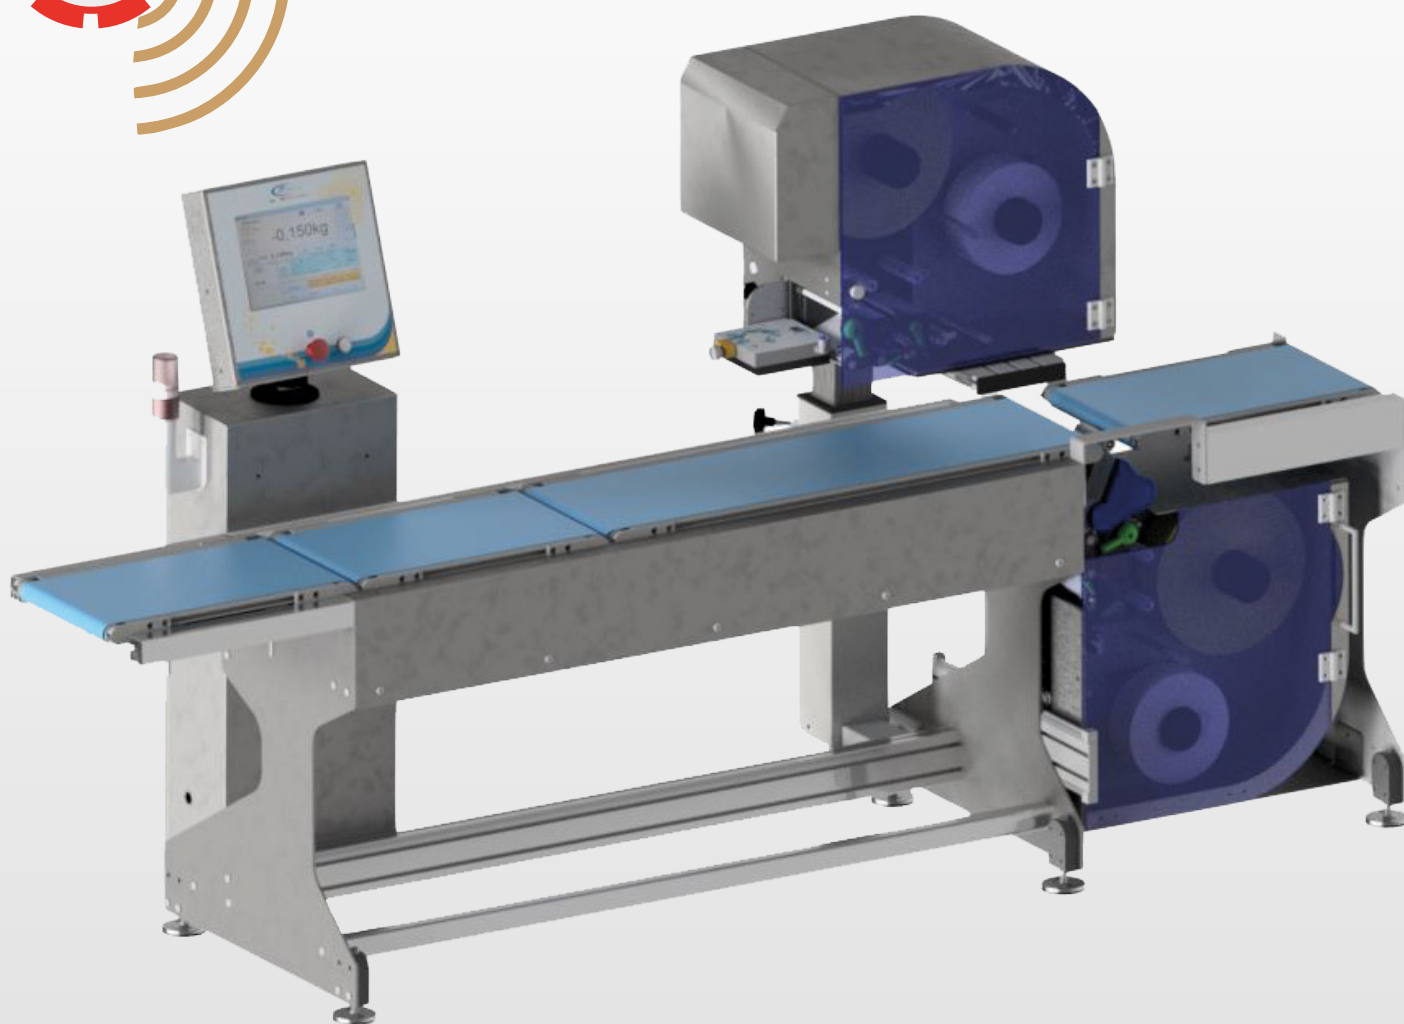

The GWX.AS2 Plus range
Weigh price labeller

RS BILANCE

Technical specifications

GWX.AS2 Plus

MAIN FEATURES

- Cadences up to: **60 ppm.**
- Capacity: 3/6/12 kg - 1/2 g.
- 4 motorized belts, with closed loop.

Model GWX.AS2 Plus useful belt size [mm]

| CADENCE | WEIGHING | LABELING | OUTPUT |
|---------|----------|-------------------|---------|
| 230x510 | 230x510 | 230x570x1000/1400 | 230x510 |
| 275x510 | 275x510 | 275x570x1000/1400 | 275x510 |
| 320x510 | 320x510 | 320x570x1000/1400 | 320x510 |

- Brushless motors and drive cards, speed up to 65 m/min.
- Working temperature: from 0 °C to + 40 °C.
- Power supply: 230 Vac (Hz 50/60).
- Consumption: 1,4 kW.
- Resistive PC/Panel 10" display.
- Structure and carpentry in aluminium and stainless steel
- Machine management by PLC.
- Print: thermal and/or direct transfer.
- Resolution: 8 dots/mm, **203 dpi** (optional: 12 dots/mm, 300 dpi).
- Print speed: 203 dpi, **457 mm/s** - 300 dpi, **300 mm/s**.
- Label sizes: from 40x40 to 110x110.
- Print width: 104 mm.
- Internal diameter of the roll: 76 mm.
- External diameter of the roll: **300 mm**.
- Label application with compressed air (**AIR BLAST**), 6 bar 60 l/min, multi-label firing chamber with mechanical adjustment and position indicator.
- Label application through **rotary pneumatic arm** with sponge application plate, consumption 4/6 bar 40 l/min.
- Horizontal, **vertical and rotational (180°)** mechanical movement of the printing unit.
- Label application with electronic motorized belt.
- Linear movement on bearings for positioning of the print head.



Selectable Functions

- **SOFTWARE:**
 - ✓ Price weight program.
 - ✓ Multi language selection.
 - ✓ Password on multiple levels.
 - ✓ Remote assistance on request.
- **PLU:**
 - ✓ Number of plu: 9999.
 - ✓ For each plu:
 - ☑ 5 text fields, each of 500 characters (for example: ingredients, allergens etc ..).
 - Able to print in bold, italic, underline, font single.
 - Supports different types of characters, not just by line.
 - Automatic parameter programming (motor speed, minimum and maximum weighing threshold, duration and expulsion delay, label and variable application along the X axis).
- **TRACEABILITY:**
 - ✓ Maximum number of lots: 9999.
 - ✓ For each lot:
 - ☑ 10 lines of 50 characters each for the data sent from the back office.
 - ☑ Or the manual entry of data (scanner for EAN128 ?).
 - ☑ Weight limit with configurable alarm.
 - ☑ Expiry date with configurable warning.
- **LABEL FORMATS:**
 - ✓ Customizable label formats: 1000. (print format can be modified on the machine).
 - ✓ Rotation of the label format: 0, 90, 180, 270.
 - ✓ Rotation of fields.
- **NUTRITIONAL DATA:**
 - ✓ Print nutritional data in table format.
 - ✓ Print data for standard dimensions (100 g) and/or per portion.
 - ✓ RDA printing.
- **TOTALS:**
 - ✓ Sub-total, general, grand total.
 - ✓ Totals for PLU.
 - ✓ Totals per traceability lot, lot/PLU.

I/O Section

- 1 USB 2.0.
- 1 Ethernet.
- 2 Electrical signals (clean contacts).

Diagnostics

- Continuous monitoring of the status of the machine and of all integrated systems (downstream consent, motor failure, overall dimensions on belts and all errors resulting from the printing system like paper end, ribbon end, paper pass and printhead wear).

Options



- 300 dpi print resolution, 300 mm/s speed.
- Bench-top labeller for totalizations.
- 2D camera for label presence.
- 2D camera for QR Code reading.
- External PROFIBUS interface, Profibus protocol with PCB.
- Communication protocol ETHERCAT.
- Pair of STAINLESS STEEL products guide.
- Piston ejector, arm or pneumatic blow.
- Collection basket in STAINLESS STEEL and plastic.
- Waste roller conveyor with collection basket.
- Notice of full collection basket.



RS BILANCE

Dimensions

GWX.A52
Plus

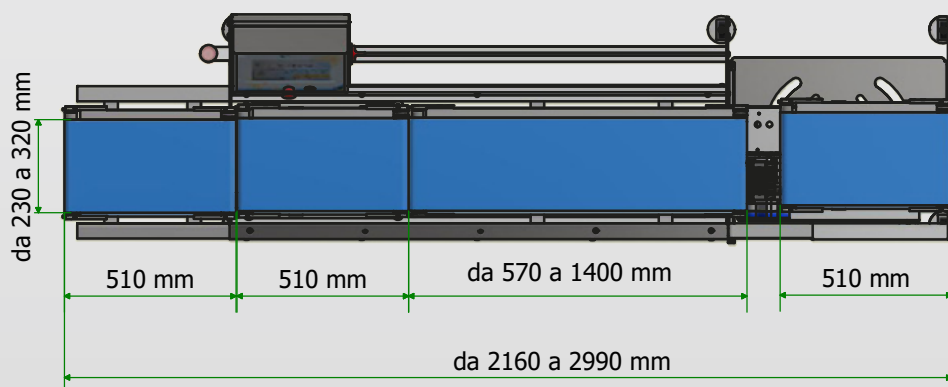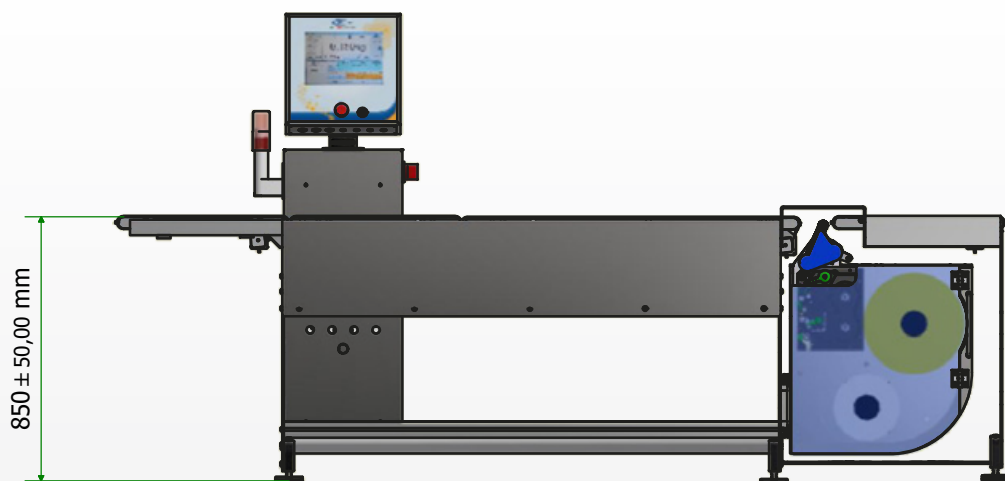

Technical specifications and images may be subject to improvements and modifications without notice.