

**Specifications**


Frequency range: DC-11 GHz

Nominal Impedance: 50 OHm

VSWR: 1 .20:1 max. @ 11 GHz

Oper. Temperature range ; -55-+145"C

**RoHS Compliant**

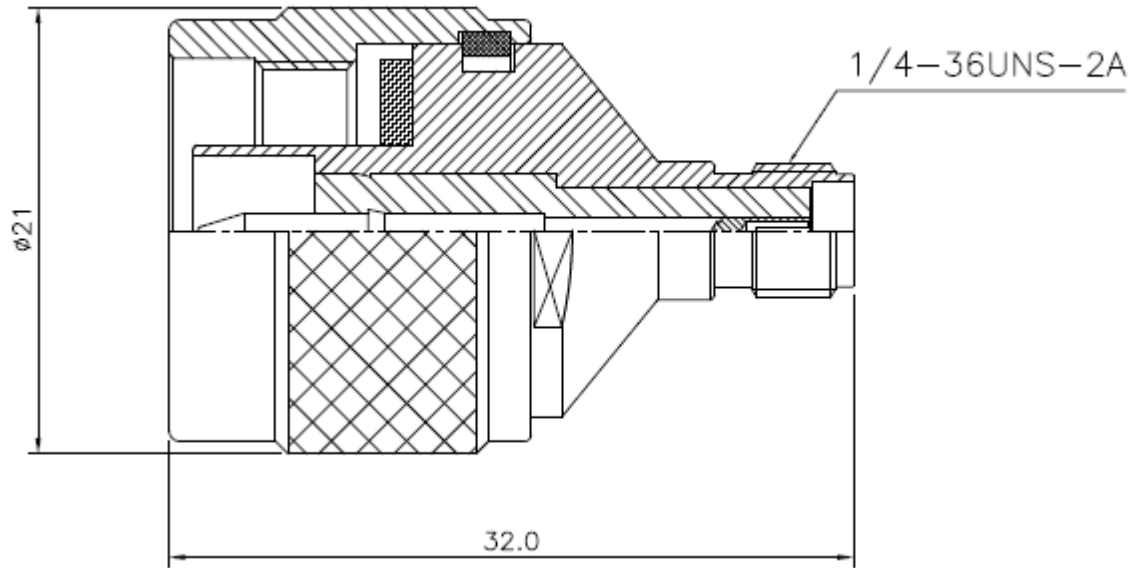

<b><u>Adapter Part</u></b>	<b><u>Material</u></b>	<b><u>Plating</u></b>
Coupling Cap	Brass	Nickel
Body	Brass	Nickel
Center contact	Beryllium Copper	Gold
Insulator	PTFE	N/A
Gasket	Silicone Rubber	N/A



**Premier RF**  
 17 Roslyn CT  
 Patchogue, NY 11772  
 PH: 631-447-3804  
 sales@premierf.com  
 www.premierf.com

Dimensions in mm	<b>PART NUMBER</b>	<b>PRF-AD1F2M</b>
03/10/2012	<b>DESCRIPTION</b>	<b>SMA FEMALE TO N MALE ADAPTER, DC-11 GHz</b>
APPROVED		
C. Smith		