
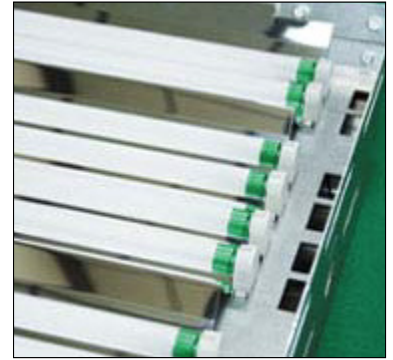


The Brightest and Toughest T8-8 Lamp Fluorescent Fixture on the Market

Description


- 93.8% Efficiency Miro-4 Super Reflector for T8-8 Lamp.
- Durable .063 Aluminum is Tog-Locked for maximum strength. (No assembly required).
- Fixture is well vented for maximum heat dissipation and longer electrical component life.
- Knockouts for end wiring and occupancy sensors. Optional Gripper hanging system.
- Wire guard or Acrylic lens will take the hit from balls and hockey pucks.
- Life time warranty on fixture housing.
- Size 4" High x 18 5/8" Wide x 48 1/2" Long x .063 Aluminum or 22 Gage Galvanized Steel.

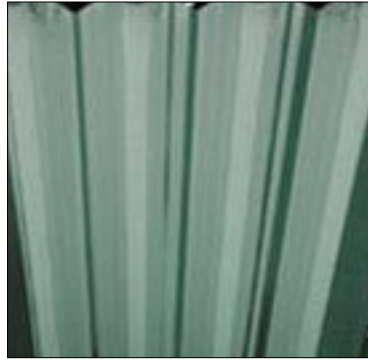

BL-T8-8L Ordering Information: (Example: BL-T8-8L/277/A/W6/L7/15P/ACL/LI/GHK6)

Lamp	Specify Voltage	Specify Fixture	Whip & Plug	Options
4 4L	120 to 480	Steel	6' W6	Lamp Included LI
6 6L		Aluminum	9' W9	Wire Guard WG
8 8L			12' W12	Acrylic Lens ACL
			20' W20	Pendent Mount Bracket PM
			15 Amp 125V L5-15P	Gripper Hanging Kit GHK
			15 Amp 277V L7-15P	6'
			20 Amp 480V L8-20P	8'
				10'
				12'

T8-8 Lamp IES File

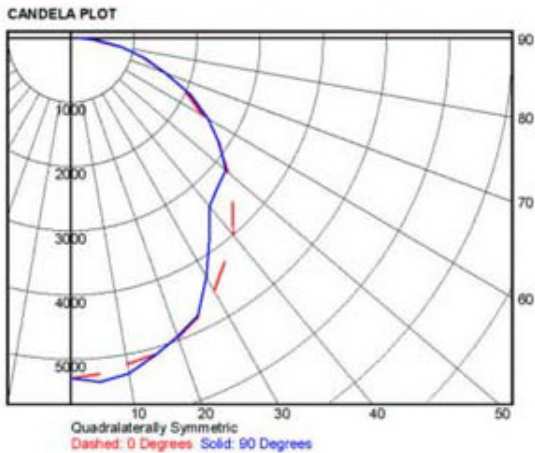

SUMMARY DATA

EFFICIENCY (Total):	89.0 %
EFFICIENCY (Downlight):	89.0 %
EFFICIENCY (Uplight):	0.0 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.27
SPACING CRITERION (90-Deg.):	1.20
LUMENS/LAMP:	2900
NO. OF LAMPS:	6
LUMINOUS OPENING: RECTANGULAR	
Width:	1.55 (Feet)
Length:	4.05
Height:	0.00
INPUT WATTS:	234
RP-1-63 VDT CONFORMANCE:	NON-CONFORM

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0 - 30	4145.5	23.8	26.8
0 - 40	6712.2	38.6	43.3
0 - 60	11804.8	67.8	78.2
60 - 90	3682.0	21.2	23.8
0 - 90	15486.8	89.0	100.0
90 - 180	0.0	0.0	0.0
0 - 180	15486.8	89.0	100.0



PATENTED

www.bestlights.com



Fixture Warranty

Best Lights, Inc. warranty fixtures to be free from defects in material and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing parts. Light bulbs and ballast on separate warranty.