

# Solid Door Reach-In Freezer



Model	Size
CFX-1	23" Unit
CFX-2	47" Unit

## STANDARD FEATURES

- Stainless steel interior and exterior, aluminum back. Option of bright white aluminum interior available.
- Freezer system keeps food at safe temperatures between -8°F and 0°F
- Self-Closing doors with 90 degree stay-open feature. Locks and keys included.
- Shelves: Adjustable heavy-duty Epoxy coated shelves.
- Option of different handles & control panels available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency
- Pre-installed heavy-duty casters with brakes
- Removable installation board makes it easy to access condenser coil for cleaning and service
- These units use HYDRO-CARBON R290 refrigerant which is environmentally friendly and more efficient than R134a/R404a refrigerant



Items	Description	Items	Description
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel	Approvals	UL-EPH
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	ABS	Refrigerant	HYDRO-CARBON R290
Interior floor	Stainless steel	Temperature range	-7°F to -1°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, Epoxy coating	Condensing unit	Bottom mounted

REFRIGERATION





# DETAILS AND DIMENSIONS

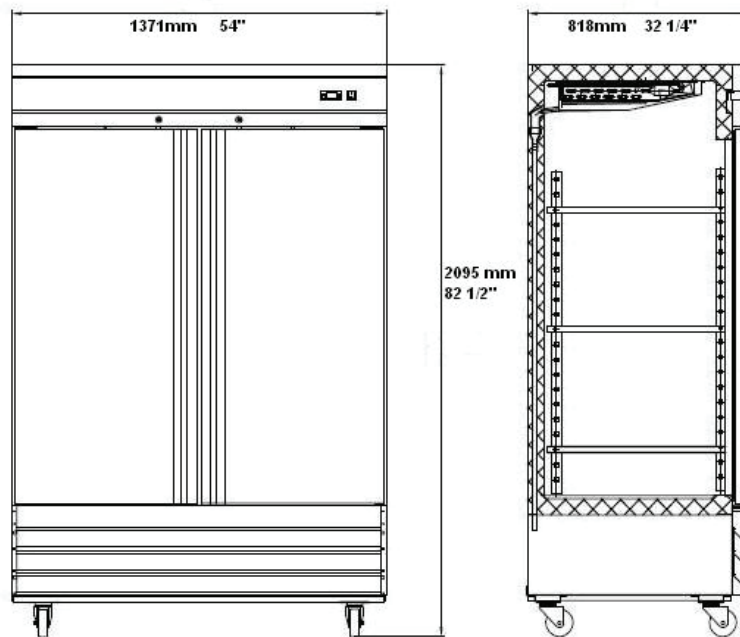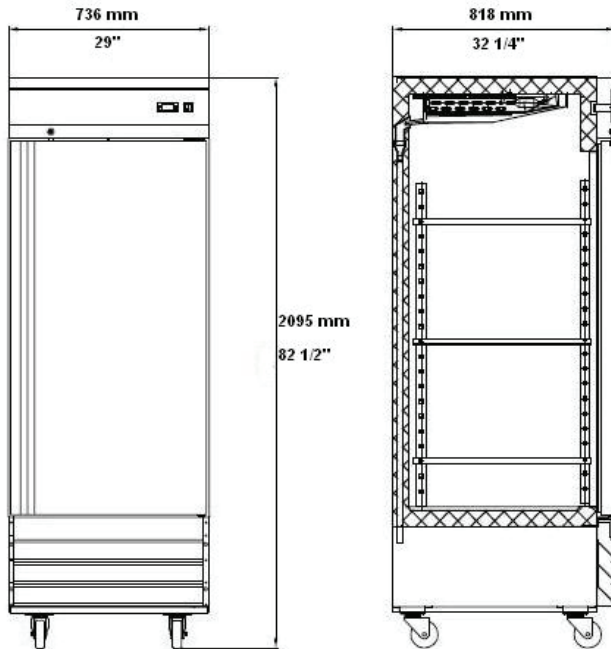

Model	Doors	Capacity (cu.ft)	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
				L	D	H						
CFX-1	1	23	3	29	32.25	82.5	1/2+	115/60/1	7.1	5-15P	10	337
CFX-2	2	47	6	54	32.25	82.5	1	115/60/1	10.7	5-20P	10	513