



ERA OILFIELD
SERVICES lubricants

GENERAL PURPOSE LITHIUM GREASE

PERFORMANCE CHARACTERISTICS

- HIGHLY VERSATILE GREASE
- EXCELLENT MECHANICAL STABILITY
- EXCELLENT OXIDATION STABILITY
- STRONG WATER RESISTANCE
- STRONG RUST RESISTANCE
- LONG LIFE IN PLACE APPLICATION
- GOOD ADHESION

GENERAL APPLICATIONS

- WET CONTACT APPLICATIONS
- GENERAL INDUSTRIAL
- AUTOMOTIVE
- MINING AND HEAVY PLANT
- GENERAL BEARING AND ROTATIONAL APPLICATIONS
- GENERAL STORAGE AND RUST PREVENTION
- GENERAL FRICTION REDUCTION

OPERATING TEMPERATURE

- -20 C TO 120 C

PRODUCT COMPOSITION

- HIGH VISCOSITY LUBRICATING OIL
- THICKENING AGENT HIGH FATTY ACID LITHIUM SOAP
- ADDITIVES FOR ANTI OXIDANT PERFORMANCE
- ADDITIVES FOR ANTI RUST PERFORMANCE
- ADDITIVES FOR COLOURING

ERA Oilfield
Services
lubricants

66/69 Moo 4, Soi 17, Phayun, Ban
Chang, Rayong, Thailand
21130
Phone: +66 8 4345 8730
www.info@eraoilfieldservices.com



GENERAL
PURPOSE
LITHIUM
GREASE

Lubricants at work for you


GENERAL PURPOSE LITHIUM GREASE

- HIGHLY VERSATILE
- GENERAL USAGE APPLICATIONS
- GOOD FRICTION REDUCTION
- HIGHLY STABLE
- STRONG WATER RESISTANCE
- LONG LIFE IN PLACE
- WET CONTACT APPLICATIONS
- STANDARD TEMPERATURE RANGE

Finding the right lubricant, when you need it, at a price that meets your budget and one that performs to the highest technical performance requirements.

ERA, have over 12 years of experience supplying heavy industry, drilling, mining and production.

We now expand our excellence to ensure that our clients have the best lubricants to maximise asset lifespan and improve asset performance.

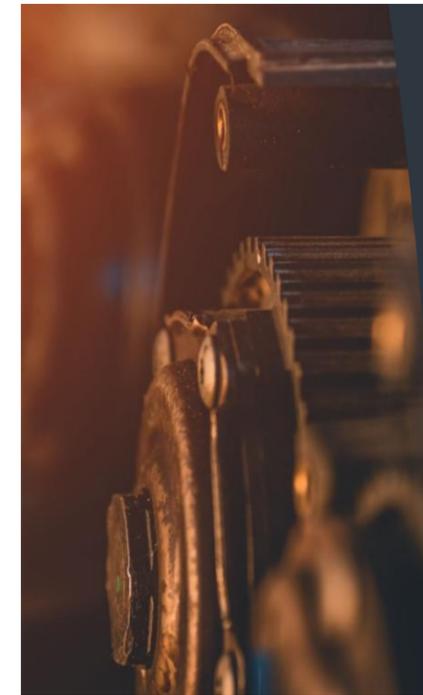

CUSTOM SOLUTIONS

- Marine
- Oil and Gas
- Construction
- Automotive
- Heavy Industrial
- Mineral Mining
- Factory Production
- Metal Machining

ERA SOLUTIONS

- FACTORY DIRECT
 - ERA BRANDED SOLUTIONS
 - LOGISTICS MANAGEMENT
 - DIRECT DELIVERY GLOBALLY
 - COST EFFECTIVE UNIT AND VOLUME
- PRICING
- CONTINUOUS CLIENT SUPPORT
 - CERTIFIED PRODUCT RANGE TO INTERNATIONAL STANDARDS

Lubricant solutions for your industry needs

TECHNICAL PERFORMANCE DATA FOR GENERAL PURPOSE LITHIUM GREASE

WORKING CONE PENETRATION (1 – 10mm)

- Standard GB / T269
- #1 320
- #2 280
- #3 232

DROPPING POINT (DEGREES CELSIUS)

- Standard GB / T4929
- #1 197 C
- #2 200 C
- #3 200 C

CORROSION RESISTANCE

- Standard SH / T325
- 58 C x 48 hrs
- Measured IN CLASS RATING
- #1 Class 1
- #2 Class 1
- #3 Class 1

EVAPORATION % (m/m)

- Standard SH / T5018
- 79 C x 1 hrs
- #1 7.0 %
- #2 7.0 %
- #3 7.0 %

KEY APPLICATION AND GENERAL USAGE

- STANDARD TEMP RANGE -20C to +120C
- WET ENVIRONMENTS
- FRICTION REDUCTION
- LONG TERM IN PLACE / STORAGE
- HIGHLY VERSATILE GREASE
- GOOD STABILITY
- RUST RESISTANCE GOOD

GENERAL INDUSTRIAL APPLICATIONS

- WET CONTACT APPLICATIONS
- GENERAL INDUSTRIAL
- AUTOMOTIVE
- MINING AND HEAVY PLANT
- GENERAL BEARING AND ROTATIONAL APPLICATIONS
- GENERAL STORAGE AND RUST PREVENTION
- GENERAL FRICTION REDUCTION

To find out more contact us directly.



CONTACT US

CONTACT US VIA WEB:

WWW.ERAOILFIELDSERVICES.COM

CONTACT US VIA EMAIL:

INFO@ERAOILFIELDSERVICES.COM
JIM.REID@ERAOILFIELDSERVICES.COM

CONTACT US VIA PHONE:

+66 8 4345 8730

