


The Brightest and Toughest T8-6 Lamp Fluorescent Fixture on the Market


Description

- 89% Efficiency Miro-4 Super Reflector for T8-6 Lamp.
- Durable .063 Aluminum is Tog-Locked for maximum strength. (No assembly required).
- Fixture is well vented for maximum heat dissipation and longer electrical component life.
- Knockouts for end wiring and occupancy sensors. Optional Gripper hanging system.
- Wire guard or Acrylic lens will take the hit from balls and hockey pucks.
- Life time warranty on fixture housing.
- Size 4" High x 18 5/8" Wide x 48 1/2" Long x .063 Aluminum or 22 Gage Galvanized Steel.

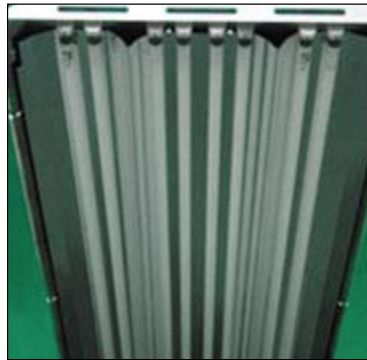

BL-T8-6L Ordering Information: (Example: BL-T8-6L/277/A/W6/L7/15P/ACL/LI/GHK6)									
Lamp	Specify Voltage	Specify Fixture	Whip & Plug		Options				
4 4L	120 to 480	Steel	ST	6'	W6	Lamp Included	LI		
6 6L		Aluminum	AL	9'	W9	Wire Guard	WG		
8 8L				12'	W12	Acrylic Lens	ACL		
				20'	W20	Pendent Mount Bracket	PM		
				15 Amp 125V	L5-15P	Gripper Hanging Kit	GHK		
				15 Amp 277V	L7-15P			6'	
				20 Amp 480V	L8-20P			8'	
								10'	
								12'	

T8-6 Lamp IES File

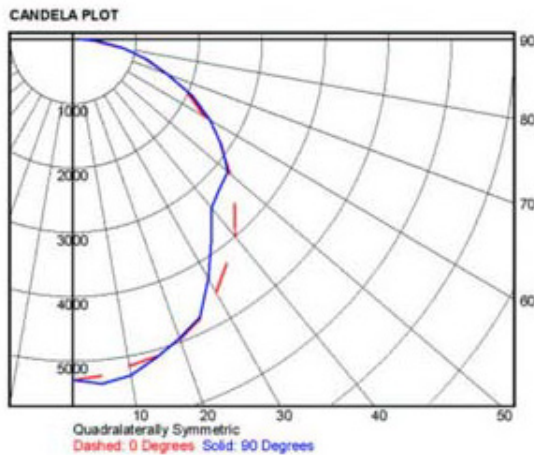

SUMMARY DATA

EFFICIENCY (Total): 89.0 %
 EFFICIENCY (Downlight): 89.0 %
 EFFICIENCY (Uplight): 0.0 %
 CIE CLASSIFICATION: DIRECT
 SPACING CRITERION (0-Deg.): 1.27
 SPACING CRITERION (90-Deg.): 1.20
 LUMENS/LAMP: 2500
 NO. OF LAMPS: 6
 LUMINOUS OPENING: RECTANGULAR
 Width: 1.55 (Feet)
 Length: 4.05
 Height: 0.00
 INPUT WATTS: 234
 RP-1-63 VDT CONFORMANCE: NON-CONFORM

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0 - 30	4145.5	23.8	26.8
0 - 40	6712.2	38.6	43.3
0 - 60	11804.8	67.8	76.2
60 - 90	3682.0	21.2	23.8
0 - 90	15486.8	89.0	100.0
90 - 180	0.0	0.0	0.0



PATENTED

www.bestlights.com



Fixture Warranty

Best Lights, Inc. warranty fixtures to be free from defects in material and workmanship under normal use and service for a period of five (5) years from date of shipment. If found to be defective by us, we will replace the non-performing parts. Light bulbs and ballast on separate warranty.