


Powerful compact thermoformer for the most demanding applications

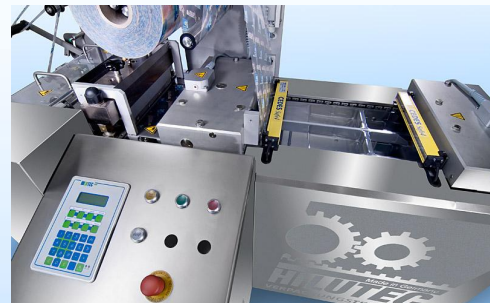

Technical data: FP-mini

➤ Machine length	2,300 mm
➤ Infeed conveyor length	400 mm
➤ Cut off length	Max. 200 mm
➤ Forming depth	Max. 100 mm
➤ Top film width	315 – 414 mm
➤ Bottom film width	320 – 420 mm
➤ Top film thickness	100 micron
➤ Bottom film thickness	200 – 300 micron
➤ Top and bottom film roll ext. dia.	Max. 300 mm
➤ Machine speed	5 – 8 cycles / minute
➤ Power	380 V 50 Hz.
➤ Air supply	6 – 10 bar
➤ Vacuum pump	63 m3 Hr.
➤ Cooling water consumption	80 – 150 lt.Hr.

General features:

- > Designed for a variety of applications.
- > Stainless steel construction.
- > Small footprint.
- > Suitable for rigid and flexible films.
- > IP-65 protection class.
- > Vacuum and (MAP) packig systems.
- > Economic film consumption.
- > Sanitary design.
- > Easy access for tool change over.