

Residential Metal Louver Utility Doors

Perfect for:

- Utility area
- > Washroom
- Storage room
- Water heater area
- Anywhere additional ventilation is desirable
- Non fire-rated openings
- *Exterior construction*


Available in:

6/8 and 8/0 high
1-3/8" and 1-3/4" thick
Bored and non-bored

Proudly Crafted in the USA!




- Integral pressed metal louvers
- ► Wood stiles for easy hardware application
- Single bore prep for cylindrical lockset 2-1/8" x 2-3/8"
- Also available with no bore
- Primed galvanized 24-gauge steel
- ▶ 11-11/16" bottom rail
- ▶ 1-3/8" and 1-3/4" thick
- ► 6/8 and 8/0 high

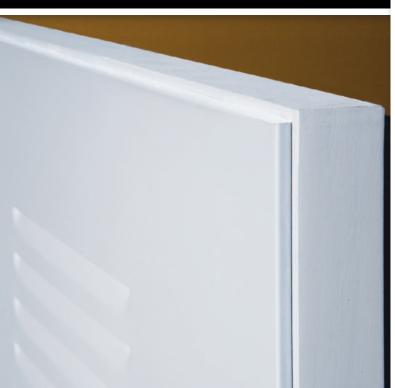


Residential Metal Louver Utility Door


This residential steel utility door features metal louvers pressed into the skin on both sides for full ventilation. Made from 24-gauge galvanized steel with internal bracing and is pre-primed to accept finish paint. Doors have softwood stiles for easy machining and typical hardware applications. Bored for lockset 2-1/8" bore with 2-3/8" backset or available with no bore. Perfect for utility applications where ventilation is desired. Kerfed bottom rail on 1-3/4" doors accepts popular door sweeps. Doors are not fire rated.




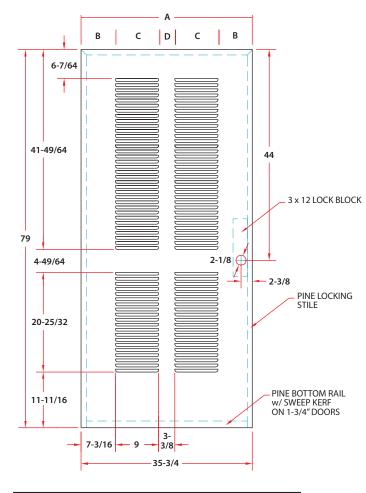

	Α	В	С	D
2′0″	23-3/4″	5-3/16″	5″	3-3/8″
2′4″	27-3/4″	5-3/16″	7″	3-3/8″
2′6″	29-3/4″	6-3/16″	7″	3-3/8″
2′8″	31-3/4″	5-3/16″	9″	3-3/8″
3′0″	35-3/4″	7-3/16″	9″	3-3/8″





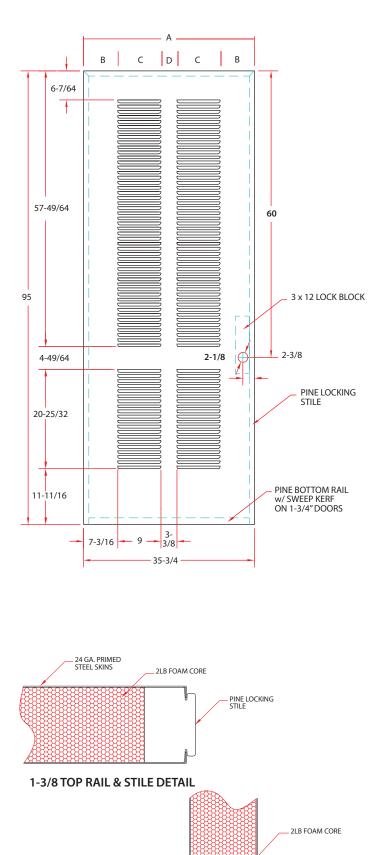

1-3/8 BOTTOM RAIL DETAIL

PINE BOTTOM RAIL

24 GA. PRIMED STEEL SKIN









ULD 913