

Convolution Network Networks for Brain Tumor Detection

Neeraj Kumari
Research Scholar
*Ramgarhia College of Engineering and
 Technology*
Phagwara, Punjab

Parminder Singh
Assistant Professor
*Ramgarhia College of Engineering and
 Technology*
Phagwara, Punjab

ABSTRACT - Extensive growth in the volume of irregular brain cells in known as brain tumor. Human brain is surrounded by stiff skull. There are various issues occurred due to growth of any tumor inside this restricted space. The malignant and benign are two main categories of the brain tumor. The skull is pressurized to enlarge from inside in case of growth of any benign or malignant tumor. This tumor leads to harm in brain and it may be dangerous to life also. The brain tumor is divided into two kinds - primary or secondary. The brain tumor detection techniques have various phases. In this research work approach of CNN is proposed for the brain tumor detection. This work takes in account some metrics for examining the competence of new algorithm.

Keywords - CNN, Brain tumor, GLCM, Segmentation

I. INTRODUCTION

Extensive growth in the volume of irregular brain cells in known as brain tumor. Human brain is surrounded by stiff skull. There are various issues occurred due to growth of any tumor inside this restricted space. The malignant and benign are two main categories of the brain tumor. The skull is pressurized to enlarge from inside in case of growth of any benign or malignant tumor. This tumor leads to harm in brain and it may be dangerous to life also. The brain tumor is divided into two kinds - primary or secondary. Brain tumors are generally divided into two categories of primary and secondary. A number of such tumors are non-cancerous (benign). Secondary tumors, on the other hand, originates due to spreading of cancerous cells in the cerebrum from other body organs. These tumors can spread to rest of the body areas. It can spread to the brain. The growth rate and the position of a brain tumor investigate its impacts on the function of nervous system. The kind of brain tumor and also its size and location have assisted in prescribing the treatment options of brain tumor [1]. At Present, digital images have tremendously influenced and impacted modern society in multiple ways. Digital image processing has emerged as a vital tool in science and technology.

The procedure of brain cancer detection is categorized generally into four phases after the selection of MRI pictures. These phases include preprocessing, segmentation, feature

extraction and classification or clustering. A block diagram describing the above four stages is presented in the Figure 1.

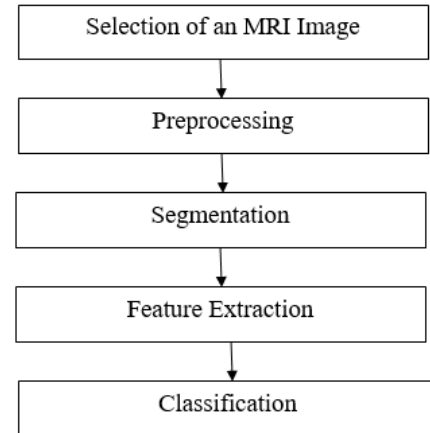


Figure.1: Crucial steps for detecting brain tumor

The quality of the brain images can be improved by applying different image preprocessing techniques. In segmentation process, an image is segmented in different regions. After image segmentation, feature extraction is to be done to extract the pattern of assessable characteristics or features of the image. Different features i.e. statistical, texture, on the basis of color and image, etc. are extracted. Classification methods are executed for classifying affected and non-affected pictures of brain [2]. These methods identify whether the abnormality present in the anomalous pictures is of malignant (cancerous) or benign (non-cancerous) type. After tumor segmentation, features are extracted from the segmented image for determining whether the tumor is low grade or high grade. There are various tumor features such as shape, size etc. which can differentiate between different tumor grades. Tumor with high grade shows more irregularity. Some popular methods of feature extraction are: Feature extraction from brain MR images using wavelets is considered as finest approach that highlights pixels in images for better results. Discrete wavelet transform (DWT) implements wavelet transform by means of a discrete group of the wavelet scales and conversions following predefined principals. In another way, this transform does the decomposition of the signal into

equally orthogonal wavelet group [11]. GLCM is a prominent texture-based algorithm for extracting features. This algorithm performs an operation on the images on the basis of second-order statistics to locate textural relationship between pixels. On the whole, this operation is performed using two pixels. GLCM algorithm finds out the frequency of combinations of these pixels' intensity levels.

II. LITERATURE REVIEW

Shrutika Santosh Hunnur, et.al (2017) analyzed that one of the parts of the image processing in medical field was the processing of MRI that was the most promising field from last few days [16]. In the initial stage, the tumor was detected. The thresholding technique was suggested to diagnose tumor within brain. The suggested method was implemented in effective way for detecting and extracting the tumorous area from MR scans which were taken from the database of patient. It was demonstrated as helpful tool for the physicians who worked in this field.

Mircea Gurbină, et.al (2019) described that the CWT, DWT and Support Vector Machines were utilized to execute a system of the brain tumor detection and prevention [17]. The recommended technique was employed for differentiating the between the benign or malign. The MRI of brain was implemented to study some kinds of brain tumors. Various wavelet transforms and SVM were carried out for detecting and classifying the brain tumors of magnetic resonance images. It was essential to classify MR scans accurately and automatically for clinical inspection and understanding.

Shrutika Santosh Hunnur, et.al (2017) studied that one of the parts of the image processing in medical field was the processing of MRI that was the most talented field from last few days [18]. In the primary step, the detection tumor was performed. The thresholding technique was suggested to diagnose tumor within brain. The presented scheme was implemented in effective way for detecting and extracting the tumorous area from MR scans which were taken from the database of patient. It was demonstrated as helpful tool for the physicians who worked in this field.

Mahesh Swami, et.al (2020) presented a hybrid algorithm on the basis of image processing and segmentation to process a radiograph CT and MRI images so that the brain tumor detection was performed [19]. Google open source brain scans were utilized to obtain the database and MATLAB v2019 was implemented to construct the system for Windows. At first, image processing was summarized for medical imaging in this work. In the engineering analysis, it was demonstrated that this algorithm had obtained 100% sensitivity, 89.66% similarity and 87.50% accuracy. The formation of a profitable

and easy to use scheme for physicians had suggested in this work.

Parveen, et.al (2015) recommended a novel hybrid method which was planned on the basis of SVM and FCM to classify the tumor [20]. The SVM was integrated with the FCM and a hybrid method in the recommended algorithm to forecast the brain tumor. The contrast improvement and mid-range stretch were improvement methods that had employed to improve the image in this algorithm. The skull striping was performed applying double thresholding and morphological operations. The image was segmented with the deployment of FCM clustering so that the suspicious area was detected in MRI image of brain. The GLRLM was carried out for extracting the attribute from the brain image. Later on, SVM was implemented to classify MR scans of brain and the accurate and more effectual outcome had obtained at the last.

T. M. Shahriar Sazzad, et.al (2019) suggested a computer assisted scheme in which the brain tumor was detected by integrating MRI gray-scale images [21]. An automated approach was suggested in this study that comprised enhancement at the preliminary phase for minimizing the gray-scale color variations. The unwanted noises were eliminated using filter operation as much as possible for assisting superior segmentation. The OTSU segmentation based on threshold was carried out as a substitute of color segmentation because of the testing of grayscale images in this study. At last, the attribute information was offered by pathology experts. This information was carried out for recognizing ROI. It was indicated in the results of experiments that the suggested approach had potential to provide superior performance in comparison with existing available approaches with respect to accuracy while maintaining the acceptable accuracy rate of pathology experts.

Mahesh Kurnar, et.al (2018) analyzed that the one of the well-known research areas was to segment brain tumor in the field of medical imaging system [22]. Brain tumor detection was very valuable for discovering the correct size and location of tumor. This paper suggested K-means approach to detect the tumorous area on the basis of segmentation and morphological operation. First of all, pre-processing of MRI scanned image was performed. Afterward, the image was transferred for clustering using K-means. The morphological operator was implemented for extracting the tumor. At last, retrieved tumorous area was computed.

A Reema Mathew, et.al (2017) emphasized on suggesting and executing a well-organized system so that the tumorous area can be diagnosed and classified [23]. All steps of image processing were comprised in this work. The anisotropic

diffusion filters were utilized to pre-process the magnetic resonance image of brain. The attributes based on DWT were extracted during in feature extraction stage. The taken-out attributes were provided in form of input in the next phase of segmentation. The tumor was segmented and classified using SVM.

Luxit Kapoor, et.al (2017) studied that the fundamental purpose of medical imaging was the significant and accurate information was extracted from these images with the least error possible [24]. The Magnetic Resonance Image was one of the highly-trustworthy and secure among several kinds of clinical imaging methods. The exposure of body was not included in it to any sorts of harmful radiation. Later on, the processing of MRI was done and the tumor was segmented. The utilization of numerous diverse methods was comprised in the segmentation of tumor. The entire procedure for the detection of tumor from an MR scan was divided into four diverse categories. The research done by other professionals was reviewed in this survey and compiled into one paper.

Digvijay Reddy, et.al (2018) described that the dicom MRI was obtained as an input and utilized to taken out abnormal brain cells [25]. The denoising of medical image was carried out by applying different techniques of pre-processing. Further, image clustering was performed using k-means approach. The morphological operations were utilized eliminate the skull from this clustered image so as the tumor cells were recognized easily. Finally, thresholding was applied to this medical scan and then level set segmentation was employed for extracting the abnormal tissues. The TP, TN, FP, recall and FN were various performance metrics that had computed so as the accuracy of the outcomes was quantified.

III. RESEARCH METHODOLOGY

This work aims to devise a new algorithm for brain tumor detection. First of all, MR scans are used as input. Then, region-based segmentation with a classification algorithm is applied on these scans so that the brain tissues can be classified into normal and abnormal. This applies k-mean clustering and CNN for segmentation and classification respectively. the approach of CNN will be applied which can categorize and localize the cancer part. CNNs represent a subcategory of the discriminative deep architecture. This algorithm efficiently performs the processing of data in dual size by means of grid-shape topology. The design of CNNs is based on the animal visual cortex. The CNNs is based on TDNNs. In TDNN, the sharing of weights is carried out in a time-based size to reduce the calculation. In these networks, the convolution has taken the place of general matrix multiplication in normal neural networks. This leads to the reduction in number of weights also the complexity of the

network. CNNs are the initial completely effective deep learning architecture because of the efficacious training of the hierarchical layers. The CNN design promotes spatial relations for reducing the number of network parameters and uses standard back propagation algorithmic approaches for improving the network performance. CNN model requires minimum pre-processing and this is the one more benefit of this approach.

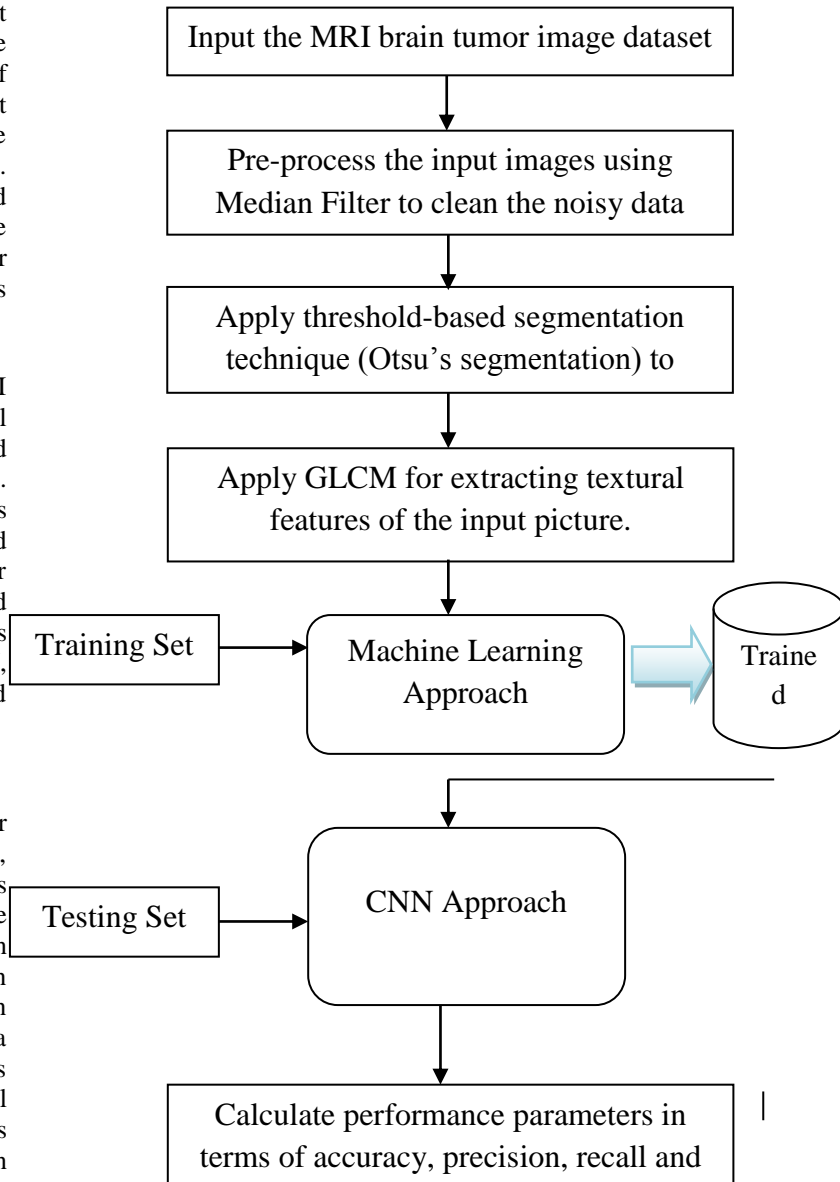


Figure 2: Proposed Methodology

IV. RESULT AND DISCUSSION

The dataset of four different patients have been collected from the hospital. They have diagnosed with specific types of brain tumor. They are having malignant tumor and are without surgery. The data were taken from the Midnapur Diagnostics Private Limited at R. G. Kar Medical College and Hospital, Kolkata (West Bengal). From the entire database 20 MRI images have been searched in which the Brain Tumor is clearly visible.

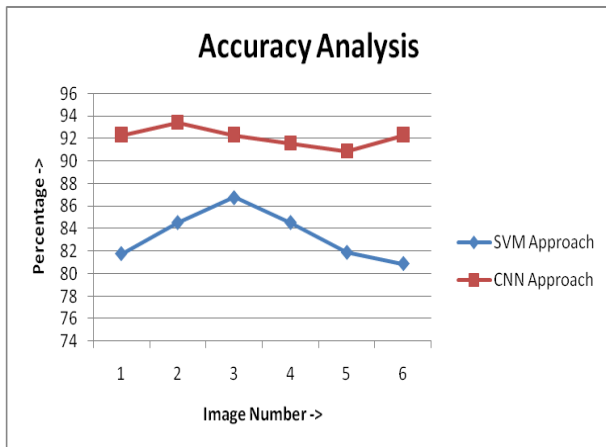


Figure 3: Accuracy Analysis

Figure 3 shows accuracy-based comparison among existing SVM and the proposed method of CNN. The SVM technique will give accuracy of 82 percent and proposed method has high accuracy of 93 percent

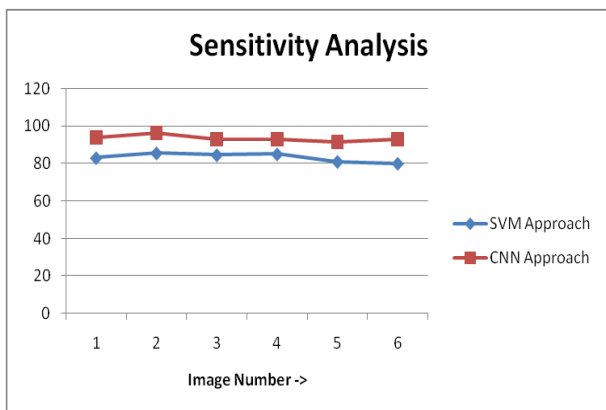


Figure 4: Sensitivity Analysis

As shown in figure 4, the sensitivity of existing method which is SVM is compared with the proposed method of CNN. The

SVM technique will give sensitivity of 82 percent and proposed method has high accuracy of 93 percent

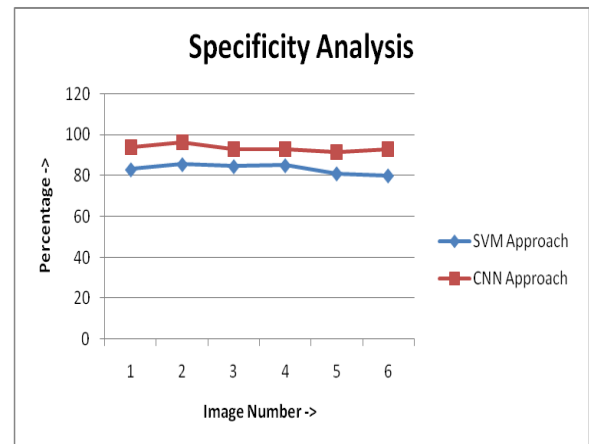


Figure 5: Specificity Analysis

As shown in figure 5, the specificity of existing method which is SVM is compared with the proposed method of CNN. The SVM technique will give specificity of 82 percent and proposed method has high accuracy of 93 percent

V. CONCLUSION

Medical image processing gains popularity due to various types of disease detection, prediction and classification. The processing and evaluation of normal as well as abnormal images is the major objective of medical image processing which helps in diagnosing the tumor affected regions from brain image dataset. The threshold-based segmentation technique will be applied for the image segmentation which remove skull from the MRI image. The textural feature extraction algorithm called GLCM will be applied for the feature extraction. For the localization and categorization of tumor region from MRI image, the machine learning algorithms will be applied in the final phase. Computer vision and machine learning toolbox are used by the proposed method when implemented in MATLAB simulator. For detecting the tumor portion, the performance of proposed and existing lesion localization and characterization approaches will be compared at the end. Certain performance parameters like precision, recall and accuracy will be calculated for analyzing the performance of proposed approach.

VI. REFERENCES

- [1] S. Muthuselvi and P. Prabhu, "Digital Image Processing Techniques: A Survey", 2016, International Multidisciplinary Research Journal

- [2] Kavita, Ritika Saroha, Rajani Bala, Ms. Sunita Siwach, "Review paper on Overview of Image Processing and Image Segmentation", 2013, International Journal of Research in Computer Applications and Robotics
- [3] Kulkarni, P.M., Naik, A.N., Bhadvankar, "A.P., Review Paper on Image Processing Techniques", 2015, International Journal for Scientific Research & Development, volume 3, issue 10
- [4] Basavaprasad B, Ravi M, "A Study on the Importance of Image Processing and Its Applications", 2014, International Journal of Research in Engineering and Technology (IJERT), Volume: 03, Issue: 03
- [5] Deepa, Akansha Singh, "Review of brain tumor detection from MRI images", 2016, 3rd International Conference on Computing for Sustainable Global Development (INDIACom)
- [6] Sidra Akbar, Shahzad Nasim, Sarwar Wasi, Syed Muhammad Ussama Zafar, "Image Analysis for MRI Based Brain Tumor Detection", 2019, 4th International Conference on Emerging Trends in Engineering, Sciences and Technology (ICEEST)
- [7] K. Bhima, A. Jagan, "Analysis of MRI based brain tumor identification using segmentation technique", 2016, International Conference on Communication and Signal Processing (ICCSP)
- [8] Aby Elsa Babu, Anandu Subhash, Deepa Rajan, Femi Jacob, Parvathy A Kumar, "A Survey on Methods for Brain Tumor Detection", 2018, Conference on Emerging Devices and Smart Systems (ICEDSS)
- [9] R. Lavanyadevi, M. Machakowsalya, J. Nivethitha, A. Niranjil Kumar, "Brain tumor classification and segmentation in MRI images using PNN", 2017, IEEE International Conference on Electrical, Instrumentation and Communication Engineering (ICEICE)
- [10] Navpreet Kaur, Manvinder Sharma, "Brain tumor detection using self-adaptive K-means clustering", 2017, International Conference on Energy, Communication, Data Analytics and Soft Computing (ICECDS)
- [11] AstinaMinz, Chandrakant Mahobiya, "MR Image Classification Using Adaboost for Brain Tumor Type", 2017, IEEE 7th International Advance Computing Conference (IACC)
- [12] L. Ramya, N. Sasirekha, "A robust segmentation algorithm using morphological operators for detection of tumor in MRI", 2015, International Conference on Innovations in Information, Embedded and Communication Systems (ICIIECS)
- [13] Virupakshappa, Basavaraj Amarapur, "An Automated Approach for Brain Tumor Identification using ANN Classifier", 2017, International Conference on Current Trends in Computer, Electrical, Electronics and Communication (CTCEEC)
- [14] D Suresha, N Jagadisha, H S Shrisha, K S Kaushik, "Detection of Brain Tumor Using Image Processing", 2020, Fourth International Conference on Computing Methodologies and Communication (ICCMC)
- [15] E Praveen Kumar, V Manoj Kumar, M G Sumithra, "Tumour detection in brain MRI using improved segmentation algorithm", 2013, Fourth International Conference on Computing, Communications and Networking Technologies (ICCCNT)
- [16] Shrutika Santosh Hunnur, Akshata Raut, Swati Kulkarni, "Implementation of image processing for detection of brain tumors", 2017, International Conference on Computing Methodologies and Communication (ICCMC)
- [17] Mircea Gurbină, Mihaela Lascu, Dan Lascu, "Tumor Detection and Classification of MRI Brain Image using Different Wavelet Transforms and Support Vector Machines", 2019, 42nd International Conference on Telecommunications and Signal Processing (TSP)
- [18] Shrutika Santosh Hunnur, Akshata Raut, Swati Kulkarni, "Implementation of image processing for detection of brain tumors", 2017, International Conference on Intelligent Computing and Control Systems (ICICCS)
- [19] Mahesh Swami, Divya Verma, "An algorithmic detection of brain tumour using image filtering and segmentation of various radiographs", 2020, 7th International Conference on Signal Processing and Integrated Networks (SPIN)
- [20] Parveen, Amritpal Singh, "Detection of brain tumor in MRI images, using combination of fuzzy c-means and SVM", 2015, 2nd International Conference on Signal Processing and Integrated Networks (SPIN)
- [21] T. M. Shahriar Sazzad, K. M. TanzibulAhmmed, Misbah Ul Hoque, Mahmuda Rahman, "Development of Automated

Brain Tumor Identification Using MRI Images”, 2019, International Conference on Electrical, Computer and Communication Engineering (ECCE)

[22] Mahesh Kurnar, Aman Sinha, Nutan V. Bansode, “Detection of Brain Tumor in MRI Images by Applying Segmentation and Area Calculation Method Using SCILAB”, 2018, Fourth International Conference on Computing Communication Control and Automation (ICCUBEA)

[23] A Reema Mathew, P Babu Anto, “Tumor detection and classification of MRI brain image using wavelet transform and SVM”, 2017, International Conference on Signal Processing and Communication (ICSPC)

[24] Luxit Kapoor, Sanjeev Thakur, “A survey on brain tumor detection using image processing techniques”, 2017, 7th International Conference on Cloud Computing, Data Science & Engineering – Confluence

[25] Digvijay Reddy, Dheeraj, Kiran, V. Bhavana, H.K Krishnappa, “Brain Tumor Detection Using Image Segmentation Techniques”, 2018, International Conference on Communication and Signal Processing (ICCSP)