

# Radio Interface Cable

For NCS-C250 Mobile Multi-Switcher

NCS Model Number

## NCS-250-KKA-XX


**Compatible Radios:**

**TK-760**

**TK-860**

To NCS-C250 Radio  
Input Jack

To Radio Accessory  
Connector

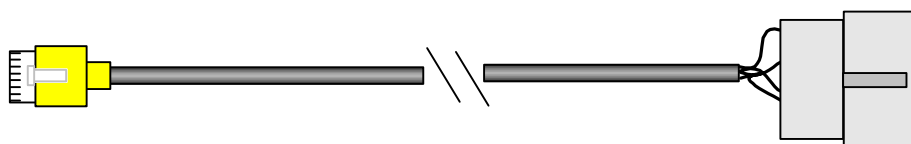

### RJ-45

Pin #	Wire Color	Function
1	White	Mic Hi
2	Green	Mic Lo
3	Brown	PTT
4	Black	Ground
5	Yellow	Rx Audio
6	Shield	Ground
7	Red	Hook Sw*
8	Orange	COR*

\*Active only if Switch Hook or  
COR Option installed.

RJ-45

Kenwood 15 Pin Connector  
P/N E09-1571-05



## Cable Wiring

### Note:

- Radio must have the Kenwood KCT-19 Accessory Cable installed in order to interface to the NCS-250-KKA-XX cable.
- To connect the COR signal to pin 13 of the KCT-19 ACC connector, solder the two anodes of D205 together. Refer to the radio's service manual for the location of this diode.