


BC LAMP REPLACEMENT

IF THE LAMP ON A BC ROASTER GOES BAD YOU CAN REPLACE THE PART. IN SOME CASES TO DO SO YOU MAY NEED TO REMOVE THE COOLING TRAY TO GET TO THE SCREWS TO REPLACE PART. PLUS THAT WILL ALLOW EASY ACCESS TO THE WIRING:

HOW TO REMOVE COOLING TRAY:

OPEN UTILITY DOOR ON BC-3-5 TO GET TO BOTTOM SIDE OF COOLING TRAY.

THERE ARE 4 THUMBSCREWS YOU WILL NEED TO REMOVE AND THEN CAREFULLY LIFT OFF TRAY IN ORDER NOT TO DAMAGE WIRING

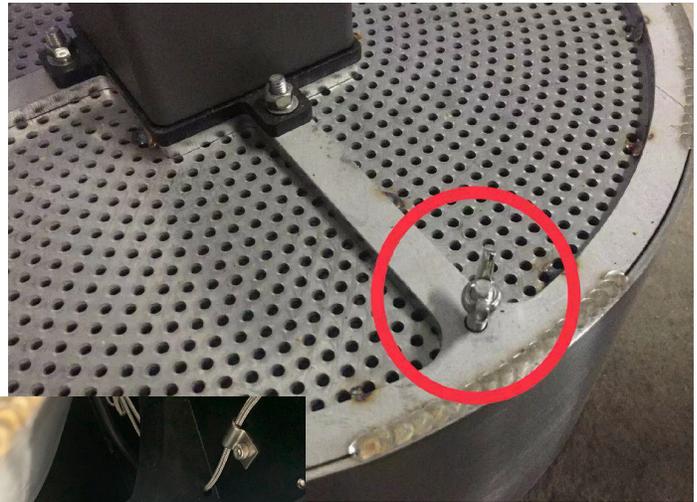

BEFORE REMOVING ANY WIRING OF OLD UNIT:

ALWAYS TAKE PICTURES WITH YOUR CELL PHONE OF THE WIRING TO AVOID MAKING MISTAKES WHEN REPLACING ANY PARTS!

THEN SIMPLY FOLLOW THE WIRING TO CONNECT. IF YOU FIND IT EASIER TO SPLICE WIRE AND USE WIRE NUTS TO CONNECT WIRES YOU CAN DO THAT AS WELL.

