

Please read this service manual carefully before installation and operation.

Rotary Blower Service Manual

Models: ZZ2M,ZZ3M,ZZ4M,ZZ5MA,ZZ6M,ZZ7M ZZ2L,ZZ3L,ZZ4L,ZZ5LA,ZZ6L,ZZ7L



2/2012



Table of Contents

1. SUMMARY	4
2. FOREWORD	5
3. SAFETY PRECAUTIONS	6
4. TECHNICAL SPECIFICATIONS	7
4.1. ROTARY BLOWER SPECIFICATIONS 4.2. AMBIENT TEMPERATURES 4.3. MAXIMUM ALLOWABLE OVERHUNG LOAD (OHL) 4.4. OIL CAPACITIES 4.5. RECOMMENDED LUBRICANT 4.6. NAMEPLATE 4.7. DIMENSIONAL DRAWINGS 4.8. PERFORMANCE CURVES 4.9. PERFORMANCE TABLES	
5. SAFETY INSTRUCTIONS	12
5.1. WARNING SYMBOLS	13
6. ARRIVAL AND USE OF THE ROTARY BLOWER	14
6.1 ARRIVAL INSPECTION	
7. MOVING AND HANDLING	15
7.1 HANDLING INSTRUCTIONS 7.2 HANDLING WITH A FORKLIFT OR PALLET JACK 7.3 HANDLING WITH A CRANE HOOK 7.4. STORAGE 7.4.1 Temporary Storage 7.4.2 Storage for longer than one year 7.4.3. Recommended Oils for Storage 7.4.4. Operating after long-term storage	
8. OPERATIONAL CHARACTERISTICS AND CONSTRUCTION	17
8.1 OPERATIONAL CHARACTERISTICS	18 19 19
9. INSTALLATION AND DESIGN REQUIREMENTS	
Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com	

All rights reserved. No part of this manual may be reproduced in any form by any means without permission from **Eurus Blower, Inc.**



9.1. Installation Requirements	20
9.2 MOUNTING CONFIGURATIONS	21
9.3. DRIVE MOTOR	22
9.3.1. Direct coupled drive with flexible coupling	
9.3.2. V-belt drive	23
9.4. SYSTEM SAFETY EQUIPMENT	24
9.4.1. Safety relief valve	24
9.4.2 Check valve	
9.4.3 Visual Indicators of Temperature and Pressure	26
9.4.4 Monitoring Device switches	26
9.4.5. Noise reduction	
10. OPERATING A ROTARY BLOWER	27
10.1. PRIOR TO STARTING UNIT FOR FIRST TIME	27
10.2. STARTING AND STOPPING THE ROTARY BLOWER	
10.3. TROUBLE SHOOTING	
10.3.1 Trouble Shooting Guide	
11. MAINTENANCE	31
11.1 RULES FOR MAINTENANCE	31
11.2. REGULAR MAINTENANCE SCHEDULE	31
11.3 OIL LEVEL CHECK	32
11.4 LUBRICATING OIL/GREASE CHANGE	
12. SPARE PARTS AND AFTER SALES	34
13. MAINTENANCE SCHEDULE SHEET	52



1. SUMMARY

Before installation and operation, read this Service Manual carefully Check package for damage. If found file claim with carrier and notify EURUS. Must be carefully when operating rotary blowers, see *Safety Instructions* Make sure both driving and driven equipment is correctly lubricated before start-up, see *Oil Capacities and Recommended Lubricant*.

In event of trouble during installation or operation, do not attempt repairs of blower. Notify Eurus, giving all nameplate information, Will received a technical service. See *Operating a Rotary Blower*

Before install the blower, See Installation and Design Requirements.

Store the rotary blower in a dry, covered space, see *Storage*.

Always operate rotary blowers in a dry and dust free environment, See *Operational Characteristics and Construction*.



2. FOREWORD

ZZ Series blowers are the result of advanced engineering and skilled manufacturing. To be assured of receiving maximum service from this machine, the owner must exercise care in its operation and maintenance. This manual is written to give the operator and maintenance department essential information for day-to-day operation, maintenance and adjustment. Careful adherence to these instructions will result in economical operation and minimum downtime.

▲ DANGER

Danger is used to indicate the presence of a hazard which will cause severe personal injury, death, or substantial damage if the warming is ignored.

AWARNING

Warning is used to indicate the presence of a hazard which can cause severe personal injury, death, or substantial damage if the warming is ignored.

A CAUTION

Caution is used to indicate the presence of a hazard which will or can cause minor personal injury or property damage if the warning is ignored.

NOTICE

Notice is used to notify people of installation, operation or maintenance information which is important but not hazard-related.



3. SAFETY PRECAUTIONS

Safety is everybody's business and is based on your use of good common sense. All situations or circumstances cannot always be predicated and covered by established rules .Therefore, use your past experience ,which out for safety hazards and be cautious .Some general safety precautions are given below.

A DANGER

Failure to observe there notices could result in injury to or death of personnel

- Keep fingers and clothing away form revolving fan, drive coupling, etc.
- <u>Do not use the air discharge</u> from this unit for breathing-not suitable for human consumption.
- <u>Do not loose or remove</u> the oil filler plug ,drain plugs, covers or break any connections ,etc., in the blower air or oil system until the until the is shut down and the air pressure has been relieved.
- <u>Electrical shock</u> can and may be fatal.
- Blower unit must be grounded in accordance with the National Electrical
 Code .A ground jumper equal to the size of the equipment ground conductor must be used to connect the blower motor base to the unit base.
- Open main disconnect switch, tag and lockout before working on the control.
- <u>Disconnect the blower from its power source, tag and lockout before working on the control.</u>

MARNING

Failure to observe these notices could result in damage to equipment

- Stop the unit if any repairs or adjustments on or around the blower are required.
- <u>Disconnect the blower</u> from its power source, tag and lockout before working on the unit-this machine maybe automatically controlled and may start at any time.
- <u>Do not exceed</u> the rated maximum speed shown on the nameplate
- <u>Do not operate unit</u> if safety devices are not operating properly. Check periodically. Never bypass safety devices.



4. Technical Specifications

4.1. Rotary Blower Specifications

	ZZ2M	ZZ3M	ZZ4M	ZZ5MA	ZZ6M	ZZ7M		
Configuration ¹	l	l				•		
	Vertical or	Horizontal	Flow Config	uration				
Direction of Rotati	on 1							
<u> </u>		CW or CCW						
Inlet CFM ^{2, 5} (@)	maximum .	speed and	maximum .	$\Delta p)$				
	73	159	346	481	751	1316		
Power Consumption	$n^{3,5}$ (E	BHP @ ma	ximum spe	ed and ma	Δp)		
Blower	6.2	12.2	19.8	35.7	59.8	70.9		
	(12 psi) 3.8	(12 psi) 7.5	(10 psi) 15.7	(13 psi) 21.6	(14 psi) 35.3	(10 psi) 56.8		
Vacuum	(15 InHg)	(15 InHg)	(16 InHg)	(16 InHg)	(16 InHg)	(16 InHg)		
Operating Limits								
Max RPM	5275	3600	3600	2850	2350	2050		
Max Case Pressure,		1	25 (1	psig)		•		
Max Δp Blower ^{4,5} (psi)	12	12	10	13	14	10		
Max Δp Vacuum ^{4,5} (InHg)	15	15	16	16	16	16		
Max Pressure Ratio ⁴	2:1	2:1	2.15:1	2.15:1	2.15:1	2.15:1		
Max Discharge Temp. °F	313	287	290	285	308	288		
Max Inlet Temp. °F		<u> </u>	•	104	1	•		
Connection	•							
Inlet Port (ANSI) Discharge Port (ANSI)	NPT 1"	NPT 2"	NPT 2.5"	NPT 4"	5"	6"		
Weight (lb)						<u> </u>		
,, e.g (15)	48	88	132	217	364	684		
	I	1	1	I	l			
	ZZ2L	ZZ3L	ZZ4L	ZZ5LA	ZZ6L	ZZ7L		
Configuration ¹	T							
	Vertical or Horizontal Flow Configuration							
Direction of Rotati	on 1							



	CW or CCW						
Inlet CFM $^{2, 5}$ (@maximum speed and maximum Δp)							
	176	311	527	862	1521	2242	
Power Consumption $^{3, 5}$ (BHP @ maximum speed and maximum Δp)							
Blower	7.1 (7 psi)	12.5 (7 psi)	20.4 (7 psi)	32.3 (7 psi)	58.7 (7 psi)	72.7 (7 psi)	
Vacuum	7 (14 InHg)	12.2 (14 InHg)	20 (14 InHg)	31.6 (14 InHg)	57.8 (14 InHg)	12.2 (14 InHg)	
Operating Limits							
Max RPM	5275	3600	3600	2850	2350	2050	
Max Case Pressure,			25 (1	psig)			
Max Δp Blower ^{4,5} (psi)	7	7	7	7	7	7	
Max Δp Vacuum ^{4,5} (InHg)	12	14	14	14	14	14	
Max Pressure Ratio 4	1.88:1	1.88:1	1.88:1	1.88:1	1.88:1	1.88:1	
Max Discharge Temp. °F	238	248	239	239	248	198	
Max Inlet Temp. °F	104						
Connection							
Inlet Port (ANSI) Discharge Port (ANSI)	NPT 2"	NPT 2.5"	NPT 3"	NPT 4"	6"	8"	
Weight (lb)							
	60	111	162	285	529	838	

Notes

- 1. The user can select the configuration according to their installation requirements.
- 2. The effective volume flow is dependent on the speed and the differential pressure.
- 3. The power consumption is dependent upon the operating point required, e.g. volume-flow and differential pressure.
- 4. The ratings based on inlet air at standard pressure of 14.7 psia, standard temperature of 68 degrees F, and specific gravity of 1.0.
- 5. $\Delta p = discharge pressure inlet pressure$

4.2. Ambient Temperatures

Minimum ambient temperature *	5 °F
Maximum ambient temperature *	

* These temperature limits are based on lubricants specified here within. Consult Eurus Blower for recommendations if operating environment temperatures exceed limits (see

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 8

All rights reserved. No part of this manual may be reproduced in any form by any means without permission from **Eurus Blower, Inc.**




lubricant recommendations, section 4.5).

4.3. Maximum Allowable Overhung Load (OHL)

ARC OF CONTACT FACTORS

MODEL	Gear Diameter (Inches)	DUAL SPLASH LUBE Dimensions (Inches)			Maximum Allowable Moment(LB-IN)
		A	В	C	
ZZ2M/ZZ2L	2.76	2.78	0.87	0.25	150
ZZ3M/ZZ3L	3.54	2.90	0.94	0.25	390
ZZ4M/ZZ4L	4.04	3.63	1.26	0.3	500
ZZ5MA/ZZ5LA	5.08	4.09	1.57	0.3	1280
ZZ6M/ZZ6L	5.98	4.51	1.57	0.38	1800
ZZ7M/ZZ7L	7.09	4.95	1.68	0.38	3000



Z	Ac										
0.000	1.000	0.250	0.966	0.500	0.926	0.750	0.879	1.000	0.823	1.250	0.751
0.025	0.997	0.275	0.962	0.525	0.922	0.775	0.874	1.025	0.816	1.275	0.742
0.050	0.994	0.300	0.958	0.550	0.917	0.800	0.869	1.050	0.810	1.300	0.734
0.075	0.990	0.325	0.954	0.575	0.913	0.825	0.864	1.075	0.803	1.325	0.725
0.100	0.987	0.350	0.951	0.600	0.908	0.850	0.858	1.100	0.796	1.350	0.716
0.125	0.983	0.375	0.947	0.625	0.904	0.875	0.852	1.125	0.789	1.375	0.706
0.150	0.980	0.400	0.943	0.650	0.899	0.900	0.847	1.150	0.782	1.400	0.697
0.175	0.977	0.425	0.939	0.675	0.894	0.925	0.841	1.175	0.774	1.425	0.687
0.200	0.973	0.450	0.935	0.700	0.889	0.950	0.835	1.200	0.767		
0.225	0.969	0.475	0.930	0.725	0.884	0.975	0.829	1.225	0.759		

http://www.eurusblower.com E-mail: sales@eurusblower.com Eurus Blower, Inc.



CALCULATION OF BELT PULL

Belt Pull =
$$\left[\frac{2.5 - AC}{AC}\right] \times \left[\frac{125954 \times Hp \times S.F.}{D \times RPM}\right]$$

Key:

Ac = Arc of Contact Factor (Refer to Arc of Contact Factor Chart above)

Hp = **Blower Horsepower for Operating Conditions**

S.F. = Actual Drive Service Factor

D = Blower Sheave Pitch Diameter in Inches

RPM = **Blower Sheave Speed**

Large Sheave Pitch Diameter (in) - Small Sheave Pitch Diameter (in) $\mathbf{Z} =$ Sheave Center Distance (in)

CALCULATION OF SHAFT MOMENT

Shaft Moment (LB-IN) = Belt Pull
$$\times \left[B + C + \left(\frac{\text{Sheave Width}}{2} \right) \right]$$

4.4. Oil Capacities

At the gear end, the timing gear teeth are lubricated by being partially submerged in oil. The gear teeth

36.11	Gear	Horizontal	Flow Configuration	Vertical Flow Configuration	
Model	Diameter(i n)	Gear End	Drive End *	Gear End	Drive End *
ZZ2M (L)	2.76	1.83 OZ	Grease 1.3 OZ	4.59 OZ	Grease 1.3 OZ
ZZ3M (L)	3.54	4.03 OZ	Grease 1.48 OZ	11.44 OZ	Grease 1.48 OZ
ZZ4M (L)	4.04	6.70 OZ	Grease 1.67 OZ	15.15 OZ	Grease 1.67 OZ
ZZ5MA(LA)	5.08	14.83 OZ	Grease 2.37 OZ	36.41 OZ	Grease 2.37 OZ
ZZ6M (L)	5.98	28.67 OZ	Grease 11.23 OZ	65.22 OZ	Grease 11.23 OZ
ZZ7M (L)	7.09	68.86 OZ	Grease 16.69 OZ	128.01 OZ	Grease 16.69 OZ

serve as oil slingers for gear end bearings.

Drive end bearings are grease lubricated at the factory with Lithium Complex based grease.

*Reference Value


Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 10

> All rights reserved. No part of this manual may be reproduced in any form by any means without permission from Eurus Blower, Inc.



4.5. Recommended Lubricant

Use the appropriate grade and viscosity of industrial type, non-detergent, rust inhibiting, anti-foaming oil (Reference Chart 1 below). The correct oil depends on the range of ambient temperatures as well as the range of discharge temperatures.

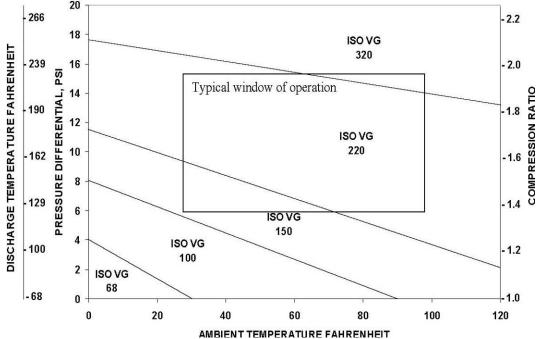


Synthetic lubricants are highly recommended over mineral lubricants: synthetics last up to 4 times longer; and a single viscosity can cover a broader temperature range.

Consult factory for oil recommendations on special applications. Use general purpose lithium grease suitable for temperature ranges of -4° F to 248° F.

4.6. Nameplate

The nameplate of the rotary blower is located on the oil cover gear side





4.7. Dimensional Drawings

Documents can be provided by Eurus Blower Customer Service Department

4.8. Performance Curves

Performance curves can be provided by Eurus Blower Customer Service Department

4.9. Performance Tables

Performance tables can be provided by Eurus Blower Customer Service Department

5. Safety Instructions

Read this service manual carefully and abide by all warnings and precautions before putting the rotary blower into operation and/or before performing any maintenance.

5.1. Warning Symbols

Symbol	Meaning
	This symbol indicates information that can cause injury or death. It is critical that these rules are observed and that extreme care is taken in these cases. For their own protection, inform all other users of these safety rules. Observe general safety and accident prevention rules as well as the safety procedures in this manual.




۸+	+0	nt	10	n l
At	LE.	H	TO	11:

This symbol indicates considerable attention must be paid to recommendations, regulations, references and correct sequencing so that damage and/or destruction of the rotary blower and/or other equipment is prevented.



This symbol indicates environmental protection measures.



This symbol indicates manual operations that are to be performed by the operator or service technician.

5.2 Safety warning and regulations (OSHA CFR 29, 19100)



blowers:

Observe the following warnings when operating rotary

- Because of danger to maintenance and operation personnel from rotating parts, high temperatures and harmful noise, protective measures against these hazards must be taken by the user.
- No open flame or flying sparks should be in the vicinity of unit.
- If any welding or grinding work is needed near the rotary blower, ensure that sparks or high temperatures cannot cause fire or explosion.
- Operating personnel must be instructed on the necessity of wearing hearing protection during operation of the rotary blower - especially when operating without the acoustic hood.
- Do not stay for long periods in the direct vicinity of operating rotary blowers with damaging noise levels.



- Do not use rotary blowers to convey or handle explosive or damaging gases.
- Because of the high temperatures generated (up to 313°F), do not touch pipes or ancillaries during operation of the rotary blower. Wait until the blower has cooled down and pressure is vented before performing any repairs.
- Only specially trained personnel should work on power driven systems.

5.3 General References



The rotary blower is not capable of functioning as an independent machine: it is designed as a sub-component to be used and controlled within a bigger system.

The rotary blower may only be put into operation as an integral part of a complete system that has been subjected to a safety inspection proving that it conforms to the requirements of relevant safety regulations (see OSHA CFR 29, 1910)

6. Arrival and Use of the Rotary Blower

6.1 Arrival Inspection



Before accepting the shipment, perform the following inspections:

- Review the packing slip and verify that all components and accessories are included and undamaged. Uncrate or remove, from packing, all items and inspect them thoroughly. Report any damage or missing items described on the packing slip with the carrier.
- Rotate the shaft and insure smooth rotation by hand. If the contamination covers are still on the inlet and outlet of the unit, expect some resistance when turning the shaft...

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com



• Do not remove port covers. A rust inhibitor is applied at the factory to insure rust free air chamber. Wait until installation before removing covers. Once removed, the air chamber will be exposed to dirt and debris and the rust inhibitor will begin to evaporate.

6.2 Proper Use of the Rotary Blower

The rotary blower package is intended solely for the transport of oil-free air or any inert gas without any liquids or solids and in conformity with the technical specifications. For special gas applications contact Eurus Blower's Engineering Department.



Do not use this blower for any combustible or oxidizing gas applications.

Any other use is considered incorrect and will void the warranty and may cause injury or death. The manufacturer cannot accept liability for any damage caused by incorrect use. The user alone is liable for any risks incurred.

Correct use also means compliance with the installation, removal, commissioning, operational and maintenance instructions written in this manual.

This service manual is intended for operating, maintenance and supervisory personnel use only.

7. Moving and Handling

7.1 Handling Instructions

To avoid damage to the rotary blower, it is recommended to use a forklift truck; pallet jack; hoist; crane; chain; cable or a sling with certified capacities according to safety. Abide by all safety and regulatory procedures when handling rotary blowers.

7.2 Handling with a Forklift or Pallet Jack

Always place the rotary blower on a suitable pallet, box or platform to prevent tipping. Be sure the platform can support the full weight of the unit. Directly fasten the rotary



Do not lift rotary blower unit directly with the forks of a forklift or pallet jack: this can cause injury to operator and damage to the unit.

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com



blower to the structure using the mounting feet provided prior to moving the unit.

7.3 Handling with a Crane Hook

When lifting the rotary blower with a crane hook and slings, use the two Lifting Lugs provided to distribute the load evenly.



- When transporting the rotary blower with a crane, all standard safety practices and regulations regarding this type of operation must be observed.
- Do not stand below a hanging load.



- Do not exceed the maximum permissible lifting weight specified for the lifting device and rigging elements.
- Avoid sudden, sharp vertical movements when lifting, lowering and transporting the rotary blower.
- Lift no higher than needed.

7.4. Storage

7.4.1 Temporary Storage

If the unit will need to be stored for a short period of time, or there is a long period of time between delivery and installation, store the rotary blower in a dry, covered space. Leave the flanged ports blanked off to prevent contamination of the internal surfaces. Keep the unit off of the ground.

7.4.2. Storage for longer than one year

Use Temporary Storage 7.4.1 recommendations plus:

- Apply rust inhibiting oil/grease onto the flanged ports, drive shaft, and any other base metal to protect against corrosion.
- Isolate from secondary vibration
- Change oil annually.

Rotate shaft periodically (a few times biweekly is recommended)



7.4.3. Recommended Oils for Storage

EXXON RUST BAN 326 MOBIL Mobilarma 777 OR 778

SHELL V-Product 9703

Internal:

MOBIL Mobilarma 523 or 524 SHELL RIMULA 30 or ROTELLA T 20W20

7.4.4. Operating after long-term storage

To operate the unit after long-term storage, perform the following:

- Make sure the rotors rotate smoothly when rotated by hand; the lobe surface and the air chamber inside are clear.
- Perform the standard measures for installing a new unit.
 Change the lubricating oil.

8. Operational Characteristics and Construction

8.1 Operational Characteristics

To develop pressure and move air, two bi-lobe rotors, synchronized by a pair of timing gears, rotate in opposite directions in two cylindrical bores within housing.

A defined quantity of air entering the inlet port is trapped between the rotor and the housing and is carried over to the discharge port against the pressure from the application. The pressure developed depends upon the resistance of the system as well as the inlet and discharge pressures.

Each trapped volume occurs two times every revolution for each rotor, commonly referred to as the volume flow per revolution. Multiplying this by the shaft speed will define the flow rate entering the inlet port. Changing the rotational speed directly affects the volume flow.


Simultaneously, the synchronized rotors and housing serve to prevent back flow by the close proximity of the rotors to one another and the proximity of the rotors to the housing.



Because there is no contact between the rotors and the case, there is no wear and no lubrication is required. (Oil/Grease is required to lubricate the bearings and gear). The lack of contact means that some leakage occurs and the rate is directly related to the pressure differential between ports. As the pressure differential increases, the leakage rate increases.

Furthermore, as the leakage rate increases the adiabatic efficiency decreases, increasing the discharge temperature and power requirement.

The net flow rate and efficiency is then dependent upon the shaft speed, volume flow per revolution, and leakage rate at the operational pressure point.

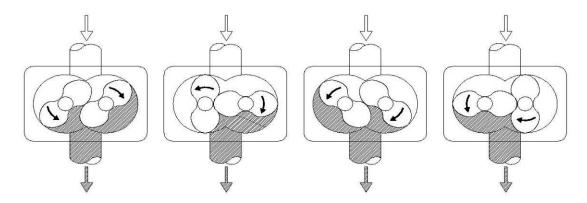

8.2 Construction

As described in operating characteristics 8.1, each blower is constructed for a specific volume flow rate per revolution and is defined by design and rotor length. The ZZ Series offers (8) eight models to choose from. Each model offers a variety of flow rates by changing the rotational speed.

To maximize efficiency, materials and clearances are chosen to maintain minimal clearance but reliable operation up to a limiting pressure differential, due to thermal overload. Thermal overload is a point at which the blower cannot dissipate enough heat (thermal energy) to maintain design clearances due to thermal expansion and deformation.

The drive shaft, located on only one rotor, can be driven in both directions and is suitable for direct or belt driven. Directly coupling the motor to the driveshaft allows for maximum power transmission.

The integrated feet allow for a universal installation: in both vertical and horizontal configurations the blower can be mounted from any side, top or bottom.


Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 18

All rights reserved. No part of this manual may be reproduced in any form by any means without permission from **Eurus Blower**, **Inc.**




8.3 Horizontal Flow Configuration

- See the following diagram for the positions of the oil level gauge, breather, Plugs, plug magnetic, lifting lug and mounting feet.
- See chapter 4.4 for oil capacities.

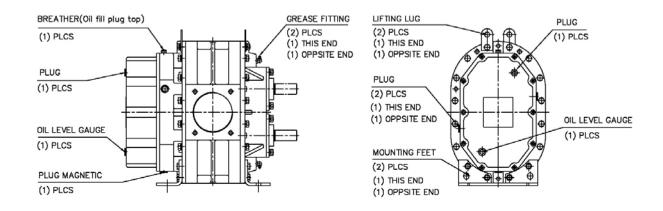

8.4 Vertical Flow Configuration

- See the following diagram for the positions of the oil level gauge, breather, Plugs, plug magnetic, lifting lug and mounting feet.
- See chapter 4.4 for oil capacities.

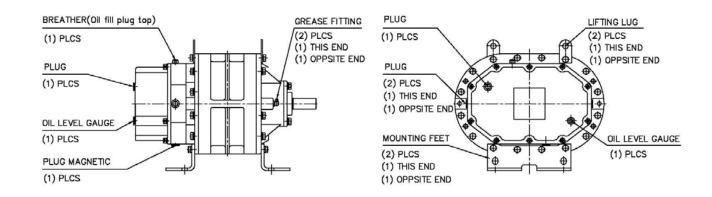



8.5 Shaft Diameter and Oil Drain (Oil Fill) Plug Thread

Model Dimension	ZZ2L ZZ2M	ZZ3L ZZ3M	ZZ4L ZZ4M	ZZ5LA ZZ5MA	ZZ6L ZZ6M	ZZ7L ZZ7M
Shaft Diameter	0.625	0.75	0.875	1.125	1.375	1.562
Oil Fill Plug Thread	M1:	01	N/14	21 E	Man	1 E
Oil Drain Plug Thread	IVIII	ZX I	IVIII	6×1.5	M20×1.5	

We can use Adapter Substitute in order to change the oil fill plug and oil drain plug thread into inches.

9. Installation and Design Requirements

9.1. Installation Requirements

Always operate rotary blowers in a dry and dust free environment.

Most ZZ blowers are shipped from the factory in the vertical flow configuration. According to installation requirements, a ZZ blower can be used in the vertical flow configuration with the drive shaft on either the right or left side; or in the horizontal flow configuration with the drive shaft in the top or bottom position. You must relocating the oil level gauge, breather, Plugs, plug magnetic, lifting lugs and mounting feet to the proper position. When changing the flow configuration, from vertical to horizontal or from horizontal to vertical, the mounting feet must be removed and rotated 90° so the side that was originally bolted to the blower becomes the base of the foot in the rotated position. As shown in 8.3 and 8.4.



Mount the rotary blower on a stable, flat base: uneven mounting can cause stress on the housing

Leave the flanged ports blanked off until the piping can be installed on the inlet and outlet flanges to prevent foreign particles and/or contamination from entering the blower.

Be sure to support the weight of the pipe work, inlet and discharge silencers, and any other connected components that are attached to the rotary blower. Do not rely on the connections with rotary blower unit to support the weight of these various components.

To isolate vibrations, only flexible pipe connections can be used when connecting the rotary blower to the rest of the system.

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 20

All rights reserved. No part of this manual may be reproduced in any form by any means without permission from **Eurus Blower**, **Inc.**



Remove the port covers before connecting to the rotary blower.


Check the drive shaft for ease of rotation by hand after installation.

Before installation of the rotary blower check that the oil level gauge, breather, Plugs, plug magnetic, lifting lug and mounting feet are correctly located according to the intended configuration, change them if necessary.

Observe temperature ratings for all system components connected to rotary blower, especially discharge flex union and discharge silencer.

9.2 MOUNTING CONFIGURATIONS

The blower flex-mount design enables horizontal and vertical mounting configurations with top or bottom hand, right or left hand shaft positioning. The units are center timed allowing rotation in either direction.

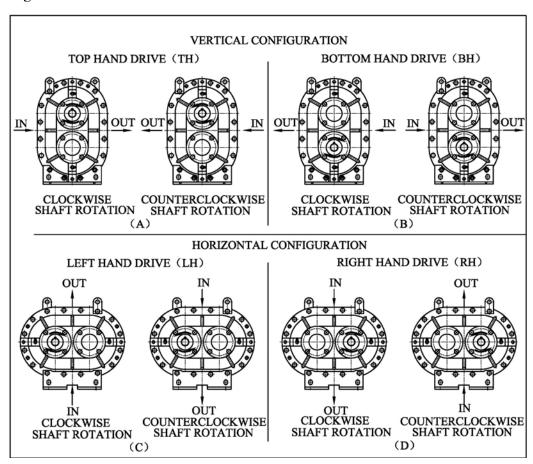



9.3. Drive Motor

The rotary blower can be driven by all standard drive sources available on the market.

The rated power of the drive source should be greater than power requirements of blower. Consult industry standard information for their service factor recommendations. Typical minimum service factors are:

Electric motor: 1.15
Belt drive systems: 1.5
Direct drive couplings: 1.4

The speed of the drive source must be selected or controlled such that the maximum permissible rotor speed cannot be exceeded (see chapter 4.1).

Drive system components must:

- Comply with speed ratings advised by their manufacture;
- Be balanced to AGMA class 7 or better;
- Be fitted to the two shafts with line to line up to 0.001" interference (heating of hubs to facilitate assembly is common practice).



Protect bearings, pulleys, sheave, coupling hub against impact damage. Do not hammer the components: this may damage the bearings.

For maximum radial shaft loading

Some axial loading of the drive shaft is permitted, but should be avoided. Static axial loads during assembly can be fully supported without damage. Dynamic (in operation) axial loading will, in some cases, decrease bearing life. If a known dynamic axial load is transmitted by the drive source, consult EURUS BLOWER'S Engineering Department.

All drive system components should have a guard that protects people in the vicinity of the unit from the exposed rotating components. Be sure that the guard is selected and installed with regard to all safety regulations, including OSHA CFR 29, 1910.



9.3.1. Direct coupled drive with flexible coupling

To directly couple the motor to the input shaft with a flexible coupling:

- The drive and driven shafts must be accurately aligned and have a sufficient gap to minimize axial and radial forces:
- Maximum deviation in offset between drive and driven shaft centerline should not exceed 0.005" TIR(total indicated run-out) referenced from both hubs; and
- Maximum deviation from parallel off centerline or hub faces should not exceed 0.001" when checked at least four points around center.

9.3.2. V-belt drive

When using V-belts to connect the motor and rotary blower, consider the following:


- Misalignment of the V-belt drive should not exceed $\pm 0.5^{\circ}$ in both parallel and perpendicular planes.
- Use the largest sheave diameters permitted by speed rating to maximize power transfer through the V-belt (This is opposite to economically driven belt drive selection, resulting in small-underrated drives).
- Use belt lengths that keep the center distance between shafts more than 24" and less than 48".
- Larger center distances are used and favor longer belt life, however the tendency for V-belts to vibrate at resonate frequencies require review.
- Shorter distances mean less misalignment forgiveness, shorter V-belt life, and low speed ratio selection (compact V-belt drives are common, but should be used on low power, low ratio, drive system with higher service factor rating, above 1.5).
- Check the tension of the V-belts and adjust, if necessary, when installing the unit.
- Manual tension adjustment systems need the V-belts checked for tension 30 minutes and 24 hours after every adjustment. Tension should not drift below values recommended by manufacture.

.....



- Automatic tension adjustment systems need adjustment once prior to operation.
- Use of small V-belt cross section for high belt speeds is recommended.
- Avoid selection of V-belts that operate near their speed limit.
- Acceptable Blower Drive Arrangement Options

The driver should be mounted on the inlet side of a vertical unit (horizontal piping) and on the side nearest to the shaft on a horizontal unit.

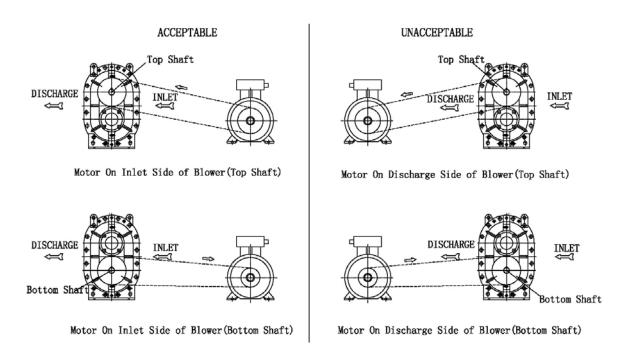

9.4. System Safety Equipment



To ensure safe, automatic operation of the rotary blower the user must install safety control equipment like pressure relief valves.

9.4.1. Safety relief valve

A relief valve(s), pressure or vacuum, is necessary to prevent the rotary blower from operating above maximum pressure differential.

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 24

All rights reserved. No part of this manual may be reproduced in any form by any means without permission from **Eurus Blower**, **Inc.**



A vacuum relief valve should be located before the inlet port if there is any possibility of a blockage in flow to exist which would exceed the maximum pressure differential -especially blowers operating with negative inlet pressure.

A pressure relief valve should be located after the discharge port if any possibility of increased resistance exists to exceed maximum pressure differential - especial blowers operating with positive discharge pressures.

Be sure that pressure relief valves must be rated for temperatures above expected discharge temperatures during operation.

Set Point

The set point on the relief valve must correspond to the designed operating pressures and the range of condition under which the unit will operate.



A pressure relief valve is necessary to be sure that the unit never exceeds its maximum pressure difference by no more than 1 psi – positive pressure or vacuum. This includes full blow- off condition.

The required relief valve flow rate should be equivalent to the maximum flow delivered by the rotary blower under those inlet and discharge conditions.

The limiting values must be observed.

9.4.2 Check valve

A check valve is necessary to prevent a reversal of flow whenever the rotary blower starts and stops.



The sizing of the check valve should be rated for the maximum flow rate and maximum operating pressure differential.

The check valve must:

 Be located after the discharge port for positive pressure and at the inlet port for vacuum; and



• Be rated for temperatures above expected discharge temperatures during operation.

9.4.3 Visual Indicators of Temperature and Pressure

Good systems employ local display of the temperature, pressure or vacuum.



Location of measurement devices should be at or near the port openings of rotary blower.

Limits should be displayed on visual indicators for quick assessment of the operating condition

9.4.4 Monitoring Device switches

For safest operation, the operating parameters (temperature and differential pressure) of the unit should be continuously monitored to be sure that they are within the limits set by the manufacturer.



The most important parameter to monitor is discharge temperature.

Because it may take a gauge some time to respond to a change in temperature, sensitive applications should directly monitor the pressure differential.

When a parameter falls out of its limits, corrective action should be quickly initiated to reduce the air resistance or reduce the rotational speed of the rotary blower.

For best results, the measuring devices should trigger the motor controls to immediately shut down the motor.

9.4.5. Noise reduction

means without permission from Eurus Blower, Inc.



Attention!

The use of inlet and discharge silencers is highly recommended.

Most designs incorporate some means of noise reduction. Here are a few points on reducing noise:

- Choose chamber type silencers if rotary blower speed is below 2250 rpm.
- Choose absorption/chamber combination silencer when operating rotary blower above 2250 rpm.



- Use large silencer volumes in excess of 15 times volume flow per revolution to minimize pulsation.
- Use silencers that attenuate peak frequencies equivalent to 0.06 x RPM.
- Discharge silencers must be rated for temperatures above expected discharge temperatures during operation.
- Sound enclosures are required to achieve noise levels below 85 dba.
- Sound enclosures must have adequately ventilated

to maintain normal ambient operating temperatures.

10. Operating a Rotary Blower

10.1. Prior to Starting Unit for First Time

Every rotary blower undergoes a mechanical run test at full nameplate pressure prior to leaving the factory. During the test, key indicators, such as vibration and temperature, are monitored for unit quality insuring conformity to specifications.

It is expected that the user employs safe working practices, and that all lawful operating and safety regulations are followed when operating this rotary blower.



Attention!

The user carries full responsibility for the installation of the rotary blower and the safety equipment required for safe operation.

Do not operate this rotary blower in spaces where heavy dust conditions, poisonous or inflammable gasses could exist.

The installation and operating procedures for all ancillary equipment must be observed.

When starting unit for the first time, do the following:



- Carry out a check of all safety and monitoring equipment.
- Check the oil level and top up if necessary.
- Check the direction of rotation of the rotary blower.
- Start with little air resistance and gradually increase.
- Take time to learn the operational characteristics and unit controls before full duty service.



10.2. Starting and Stopping the Rotary Blower

The rotary blower itself can be stopped and started repeatedly; however, most drive systems should not be subjected to repeated starts and stops. Doing this without increased service factors for all components may decrease the service life of these components.

After stopping the rotary blower, always wait for full stop before restart.

Avoid current inrush to drive source: use starters that allow gradual speed control. Start rotary blower under low load condition.

If possible allow the rotary blower to operate at reduced load, low temperature rise, for 5-10 minute prior to shutdown.

10.3. Trouble shooting

If there is a problem with the operation of the unit, consult the following table.

Be sure to note the actions and events that occurred prior to the problem.

Also, record any instrument readings that may be available.



All general safety procedures and regulations must be observed while diagnosing and correcting any problems.



10.3.1 Trouble Shooting Guide

PROBLEM	POSSIBLE CAUSES	SOLUTION		
	1. Unit out of time.	1. Re-time impellers		
	2. Distortion due to improper mounting or pipe strains.	2. Check mounting alignment and relieve pipe strains.		
Knocking	3. Excessive pressure differential.	3. Reduce to manufacturer's recommended pressure. Examine relief valve, re-set if necessary.		
	4. Worn gears.	4. Replace timing gears.		
	5. Worn bearings.	5. Replace bearings.		
	1. Too much oil in gear case.	1. Reduce oil level.		
	2. Too low operating speed.	2. Increase blower speed.		
	3. Dirty air Filter.	3. Clean or replace air filter		
Excessive blower	4. Clogged filter or muffler.	4. Remove cause of obstruction.		
temperature	5. Excessive pressure differential.	5. Reduce pressure differential across the blower.		
	6. Worn impeller clearances.	6. Replace impeller.		
	7. Internal contact.	7. Correct clearances.		
	Insufficient assembled clearances	1. Correct clearances.		
Impeller end or	2. Case or frame distortion.	2. Check mounting and pipe strain.		
tip drag	3. Excessive operating pressure.	3. Remove cause.		
	4. Excessive operating temperature.	4. Remove cause		
	1. Slipping belts.	1. Tighten belts.		
Lack of volume.	2. Worn clearances.	2. Re-establish proper clearances.		
	3. Dirty air filter	3. Clean or replace air filter.		
Excessive bearing or gear wear	1. Improper lubrication.	Correct lubrication level. Replace dirty oil or greasing.		
Loss of oil	1. End plate, gear case or drive cover vents plugged.	1. Clean vents.		
	2. Worn Seal.	2. Replace seals.		

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 30

All rights reserved. No part of this manual may be reproduced in any form by ar



11. Maintenance

11.1 Rules for maintenance



Always ensure that personnel protective measures are taken according to the accident prevention regulations.

Observe the following rules during all maintenance and service work:

- Only Trained or specialized personnel may perform work on power driven equipment;
- Stop the blower;
- Lock out and tag out the main disconnect switch to prevent a restart



Ensure that all oil and solvents and used parts are disposed of according to federal and local environmental regulations.

Isolate and de-pressurize the blower and attached piping to zero psig.

See section 9 for blower operation, starting and stopping.

11.2. Regular Maintenance Schedule

Period	Work to be done	See Chapter
1-24 hours after 1st	Check oil level frequently Check belt tension	
startup	Record baseline data.	
Everyday or	veryday or check temperature of the bearings, vibration	
frequently	and noise	
100-200 hours after	0-200 hours after Change lubricating oil	
1st startup		
Monthly	Check oil level*	
One year	Check bearing and Oil seal, check Impeller	,
	Case and Rotor, check gearing	

Eurus Blower, Inc.

http://www.eurusblower.com E-mail: sales@eurusblower.com




1500-2000 hours*	Change oil (mineral)	
6000-8000 hours*	Change oil (synthetic)	
200 hours	Greasing	

^{*} The maintenance period can vary depending on the service operating hours per day and environmental conditions. The oil should be changed at least once a year, even if the blower was not operated

Record maintenance work done.


11.3 Oil level check

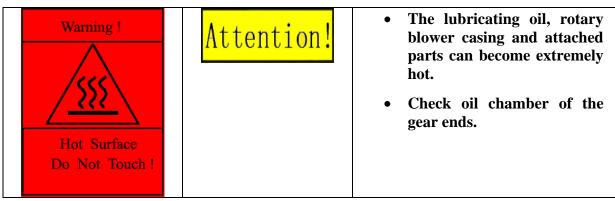

Stop the rotary blower before checking the oil level. Use the oil level gauge to determine the oil level as instructed below.

Check oil level on gear end as the rotary blower can be off level. Oil level 1/4" below the center line is in DANGER of failure; low oil level is 1/8" below the center.

Note: Oil level should be between the center line and 1/8" above center line; if the oil level is more than 1/4" above the center line, there is a risk of oil leakage.

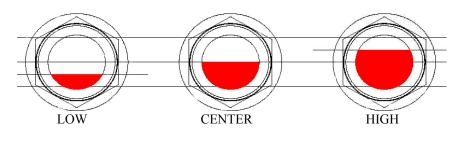

Oil level gauge

http://www.eurusblower.com E-mail: sales@eurusblower.com Eurus Blower, Inc.



To check the lubricating oil level:

- 1. Stop the rotary blower.
- 2. Check the lubrication oil level at all oil level gauge.

To initially fill the lubricating oil:

- 1. Stop the rotary blower and lock-out the power source to prevent a restart;
- 2. Unscrew the breather on top of the unit;
- 3. Pour the indicated amount of oil into the port and look at the new oil level in the sight glasses;
- 4. Fill with lubricating oil to the correct height;
- 5. Screw the breather in again;
- 6. Check for leaks.

11.4 Lubricating oil/grease Change

Change the lubricating oil when the following occur:

- Carry out the first oil change after approximately 150 hours of service
- Change oil after approximately 1500 –2500 service hours for mineral lubricants approximately 6000-8000 service hours for synthetic lubricants
- Change, at least once annually.
- Change grease every 200 hours.

To change the lubricating oil:

• Stop the rotary blower.



To avoid the dangers of burning by hot components, wait until the rotary blower has cooled down to below 140 °F.


- Change oil when the oil is warm, above approximately 130 °F.
- Place a container ready to catch the used oil (see section 1.3 for the oil capacity)
- The used oil must be collected and disposed of according to all federal and local environmental regulations.
- Drain the oil by unscrewing the oil drain plug in the bottom of the casing.
- Clean magnet on oil drain plug and screw back into port.
- Fill up with new lubricating oil.
- Screw the breather back into the port.
- Carry out a visual check for leaks.

Eurus Blower, Inc. http://www.eurusblow

http://www.eurusblower.com E-mail: sales@eurusblower.com



12. Spare parts and after sales

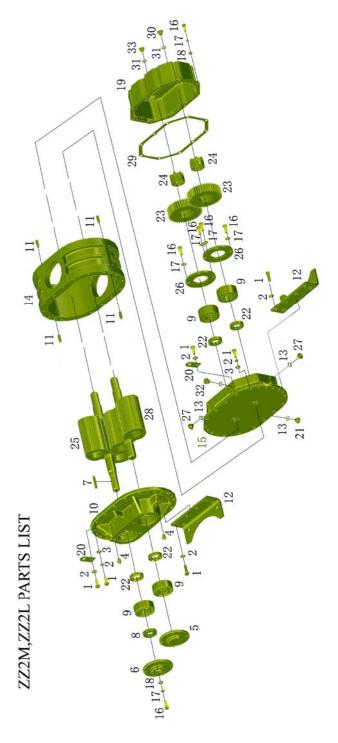



• Model: ZZ2M Parts List

All Configurations

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	24	ZZ2-001	Screw M8×25	Steel
2	24	ZZ2-002	Elastic Washer 8	Alloy Steel
3	14	ZZ2-003	Washer 8	Steel
4	2	ZZ2-004	Grease Fitting M10×1	Brass
5	1	ZZ2M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ2M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ3M-1205	Key-Square	Steel
8	1	ZZ2-005	Oil Seal TC $16 \times 30 \times 7$	viton
9	4	ZZ2-006	Ball Bearing 6303	Steel
10	1	ZZ2M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ2-007	Dowel Pin B8×28	Steel
12	2	ZZ2M-1202	Mounting Feet –Vertical & Horizontal	Steel
13	4	ZZ2-008	O-Ring $10 \times 1.8 (ID \times CS)$	viton
14	1	ZZ2M-0101	Impeller Case	Gray Iron
15	1	ZZ2M-0202	End Plate Gear Side	Gray Iron
16	26	ZZ2-009	Screw M6×20	Steel
17	26	ZZ2-010	Elastic Washer 6	Alloy Steel
18	26	ZZ2-011	Washer 6	Steel
19	1	ZZ2M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ5M-1206	Lifting Lug	Steel
21	1	ZZ2-012	Plug Magnetic M12×1	Steel
22	4	ZZ2-013	Oil Seal TC $17 \times 35 \times 7$	viton
23	2	ZZ2M-1101	Gear	Alloy Steel
24	2	ZZ2-014	Keyless Locking Assembly Z3-16×32	Steel
25	1	ZZ2M-0500	Drive Rotor	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	2	ZZ2M-0702	Bearing Clamp Plate	Steel
27	2	ZZ2-015	Plug M12×1	Steel
28	1	ZZ2M-0600	Driven Rotor	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ2M-1207	Gasket 0.5 mm	
30	1	ZZ2-016	Plug M16×1.5	Steel
31	2	ZZ2-017	O-Ring $14 \times 2.65 (ID \times CS)$	viton
32	1	ZZ3M-1209	Breather M12×1	Steel
33	1	ZZ2-018	Oil Level Gauge M16×1.5	Steel

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com




• Model: ZZ2L Parts List

All Configurations

TODA (O.T.Y		DESCRIPTION	MATERIAL
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	24	ZZ2-001	Screw M8×25	Steel
2	24	ZZ2-002	Elastic Washer 8	Alloy Steel
3	14	ZZ2-003	Washer 8	Steel
4	2	ZZ2-004	Grease Fitting M10 \times 1	Brass
5	1	ZZ2M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ2M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ3M-1205	Key-Square	Steel
8	1	ZZ2-005	Oil Seal TC $16 \times 30 \times 7$	viton
9	4	ZZ2-006	Ball Bearing 6303	Steel
10	1	ZZ2M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ2-007	Dowel Pin B8×28	Steel
12	2	ZZ2M-1202	Mounting Feet –Vertical & Horizontal	Steel
13	4	ZZ2-008	O-Ring $10 \times 1.8 (ID \times CS)$	viton
14	1	ZZ2L-0101	Impeller Case	Gray Iron
15	1	ZZ2M-0202	End Plate Gear Side	Gray Iron
16	26	ZZ2-009	Screw M6×20	Steel
17	26	ZZ2-010	Elastic Washer 6	Alloy Steel
18	26	ZZ2-011	Washer 6	Steel
19	1	ZZ2M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ5M-1206	Lifting Lug	Steel
21	1	ZZ2-018	Plug Magnetic M12×1	Steel
22	4	ZZ2-013	Oil Seal TC $17 \times 35 \times 7$	viton
23	2	ZZ2M-1101	Gear	Alloy Steel
24	2	ZZ2-014	Keyless Locking Assembly Z3-16×32	Steel
25	1	ZZ2L-0500	Drive Rotor	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	2	ZZ2M-0702	Bearing Clamp Plate	Steel
27	2	ZZ2-015	Plug M12×1	Steel
28	1	ZZ2L-0600	Driven Rotor	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ2M-1207	Gasket 0.5 mm	
30	1	ZZ2-016	Plug M16×1.5	Steel
31	2	ZZ2-017	O-Ring $14 \times 2.65(ID \times CS)$	viton
32	1	ZZ3M-1209	Breather M12×1	Steel
33	1	ZZ2-018	Oil Level Gauge M16×1.5	Steel
	L		<u> </u>	1

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com



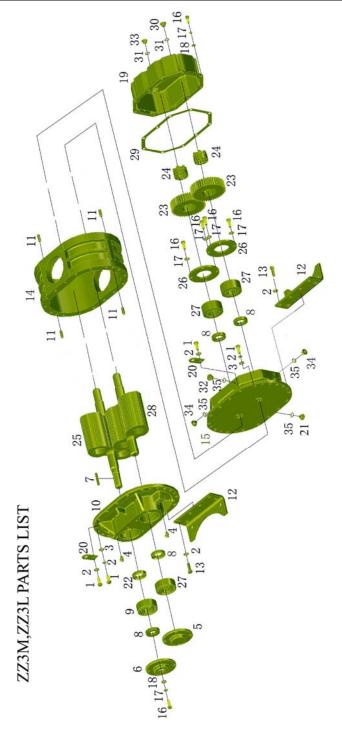



• Model: ZZ3M Parts List

All Configurations

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	16	ZZ3-001	Screw M10×25	Steel
2	24	ZZ3-002	Elastic Washer 10	Alloy Steel
3	14	ZZ3-003	Washer 10	Steel
4	2	ZZ3-004	Grease Fitting M10×1	Brass
5	1	ZZ3M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ3M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ3M-1205	Key-Square	Steel
8	4	ZZ3-005	Oil Seal TC 20×40×7	viton
9	1	ZZ3-006	Bearing – Roller NJ 2205/C3	Steel
10	1	ZZ3M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ3-007	Dowel Pin B8×28	Steel
12	2	ZZ3M-1202	Mounting Feet –Vertical & Horizontal	Steel
13	8	ZZ3-008	Screw M10×30	Steel
14	1	ZZ3M-0101	Impeller Case	Gray Iron
15	1	ZZ3M-0202	End Plate Gear Side	Gray Iron
16	26	ZZ3-009	Screw M6×20	Steel
17	26	ZZ3-010	Elastic Washer 6	Alloy Steel
18	26	ZZ3-011	Washer 6	Steel
19	1	ZZ3M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ5M-1206	Lifting Lug	Steel
21	1	ZZ3-012	Plug Magnetic M12×1	Steel
22	1	ZZ3-013	Oil Seal TC $25 \times 40 \times 7$	viton
23	2	ZZ3M-1101	Gear	Alloy Steel
24	2	ZZ3-014	Keyless Locking Assembly Z3-20×47	Steel
25	1	ZZ3M-0500	Drive Rotor Group	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	2	ZZ3M-0702	Bearing Clamp Plate	Steel
27	3	ZZ3-015	Ball Bearing 6304	Steel
28	1	ZZ3M-0600	Driven Rotor Group	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ3M-1207	Gasket 0.5 mm	
30	1	ZZ3-016	Plug M16×1.5	Steel
31	2	ZZ3-017	O-Ring $14 \times 2.65(ID \times CS)$	viton
32	1	ZZ3M-1209	Breather M12×1	Steel
33	1	ZZ3-018	Oil Level Gauge M16×1.5	Steel
34	2	ZZ3-019	Plug M12×1	Steel
35	4	ZZ3-020	O-Ring $10 \times 1.8(ID \times CS)$	viton

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 38



• Model: ZZ3L Parts List


All Configurations

1	ITEM	OTV	PART NUMBER	DESCRIPTION	MATERIAL
2 24 ZZ3-002 Elastic Washer 10 Alloy Steel 3 14 ZZ3-003 Washer 10 Steel 4 2 ZZ3-004 Grease Fitting M10×1 Brass 5 1 ZZ3M-1203 Drive Side Bearing Cover I Aluminum 6 1 ZZ3M-1204 Drive Side Bearing Cover II Aluminum 7 1 ZZ3M-1205 Kcy-Square Steel 8 4 ZZ3-005 Oil Seal TC 20×40×7 viton 9 1 ZZ3-006 Bearing – Roller NJ 2205/C3 Steel 10 1 ZZ3-006 Bearing – Roller NJ 2205/C3 Steel 11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1201 End Plate Drive Side Gray Iron 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3M-1202 Mounting Feet –Vertical & Horizontal Steel 15 1 ZZ3M-1202 End Plate Gear Side Gray Iron <td></td> <td>QTY</td> <td></td> <td></td> <td></td>		QTY			
3 14 ZZ3-003 Washer 10 Steel 4 2 ZZ3-004 Grease Fitting M10×1 Brass 5 1 ZZ3M-1203 Drive Side Bearing Cover I Aluminum 6 1 ZZ3M-1204 Drive Side Bearing Cover II Aluminum 7 1 ZZ3M-1205 Key-Square Steel 8 4 ZZ3-005 Oil Seal TC 20×40×7 viton 9 1 ZZ3-006 Bearing - Roller NJ 2205/C3 Steel 10 1 ZZ3M-0201 End Plate Drive Side Gray Iron 11 4 ZZ3-006 Bearing - Roller NJ 2205/C3 Steel 12 2 ZZ3M-0201 End Plate Drive Side Gray Iron 11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1020 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3M-008 Screw M10×30 Steel <			ļ.		
4 2 ZZ3-004 Grease Fitting M10 × 1 Brass 5 1 ZZ3M-1203 Drive Side Bearing Cover I Aluminum 6 1 ZZ3M-1204 Drive Side Bearing Cover II Aluminum 7 1 ZZ3M-1205 Key-Square Steel 8 4 ZZ3-005 Oil Seal TC 20×40×7 viton 9 1 ZZ3-006 Bearing – Roller NJ 2205/C3 Steel 10 1 ZZ3M-0201 End Plate Drive Side Gray Iron 11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-2002 End Plate Gear Side Gray Iron 16 26 ZZ3-010 Elastic Washer 6 Alloy Steel 17 26 ZZ3-010 Washer 6 Steel					•
5 1 ZZ3M-1203 Drive Side Bearing Cover I Aluminum 6 1 ZZ3M-1204 Drive Side Bearing Cover II Aluminum 7 1 ZZ3M-1205 Key-Square Steel 8 4 ZZ3-005 Oil Seal TC 20×40×7 viton 9 1 ZZ3-006 Bearing - Roller NJ 2205/C3 Steel 10 1 ZZ3M-0201 End Plate Drive Side Gray Iron 11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-009 Screw M6×20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel					
6 1 ZZ3M-1204 Drive Side Bearing Cover II Aluminum 7 1 ZZ3M-1205 Key-Square Steel 8 4 ZZ3-005 Oil Seal TC 20×40×7 viton 9 1 ZZ3-006 Bearing – Roller NJ 2205/C3 Steel 10 1 ZZ3M-0201 End Plate Drive Side Gray Iron 11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-009 Screw M6×20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-031 Oil Cover Gear Side Aluminum <					
7 1 ZZ3M-1205 Key-Square Steel 8 4 ZZ3-005 Oil Seal TC 20×40×7 viton 9 1 ZZ3-006 Bearing – Roller NJ 2205/C3 Steel 10 1 ZZ3M-0201 End Plate Drive Side Gray Iron 11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-010 Elastic Washer 6 Alloy Steel 17 26 ZZ3-011 Washer 6 Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 <				Ÿ	
8 4 ZZ3-005 Oil Seal TC 20×40×7 viton 9 1 ZZ3-006 Bearing – Roller NJ 2205/C3 Steel 10 1 ZZ3M-0201 End Plate Drive Side Gray Iron 11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-010 Elastic Washer 6 Alloy Steel 17 26 ZZ3-010 Elastic Washer 6 Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23					
9 1 ZZ3-006 Bearing − Roller NJ 2205/C3 Steel 10 1 ZZ3M-0201 End Plate Drive Side Gray Iron 11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1202 Mounting Feet −Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-009 Screw M6×20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 <td>7</td> <td>1</td> <td>ZZ3M-1205</td> <td></td> <td>Steel</td>	7	1	ZZ3M-1205		Steel
10	8	4	ZZ3-005	Oil Seal TC $20 \times 40 \times 7$	viton
11 4 ZZ3-007 Dowel Pin B8×28 Steel 12 2 ZZ3M-1202 Mounting Feet –Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-009 Screw M6×20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25	9	1	ZZ3-006	Bearing – Roller NJ 2205/C3	Steel
12 2 ZZ3M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ3-008 Screw M10 × 30 Steel 14 1 ZZ3M-0202 End Plate Gear Side Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-009 Screw M6 × 20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Im	10	1	ZZ3M-0201	End Plate Drive Side	Gray Iron
13 8 ZZ3-008 Screw M10×30 Steel 14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-009 Screw M6×20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-012 Plug Magnetic M12×1 Steel 23 2 ZZ3M-120 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Drive Shaft Al	11	4	ZZ3-007	Dowel Pin B8×28	Steel
14 1 ZZ3L-0101 Impeller Case Gray Iron 15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-009 Screw M6×20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group Drive Rotor Group 1 1 Drive Rotor Group Steel 26 2 <t< td=""><td>12</td><td>2</td><td>ZZ3M-1202</td><td>Mounting Feet –Vertical & Horizontal</td><td>Steel</td></t<>	12	2	ZZ3M-1202	Mounting Feet –Vertical & Horizontal	Steel
15 1 ZZ3M-0202 End Plate Gear Side Gray Iron 16 26 ZZ3-009 Screw M6×20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group Drive Shaft Alloy Steel 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3M-1207 Gasket 0.5 mm One	13	8	ZZ3-008	Screw M10×30	Steel
16 26 ZZ3-009 Screw M6×20 Steel 17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3L-0500 Drive Rotor Group Drive Rotor Group 1 1 Drive Shaft Alloy Steel 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron	14	1	ZZ3L-0101	Impeller Case	Gray Iron
17 26 ZZ3-010 Elastic Washer 6 Alloy Steel 18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 </td <td>15</td> <td>1</td> <td>ZZ3M-0202</td> <td>End Plate Gear Side</td> <td></td>	15	1	ZZ3M-0202	End Plate Gear Side	
18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3M-101 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017	16	26	ZZ3-009	Screw M6×20	Steel
18 26 ZZ3-011 Washer 6 Steel 19 1 ZZ3M-0311 Oil Cover Gear Side Aluminum 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 <td>17</td> <td>26</td> <td>ZZ3-010</td> <td>Elastic Washer 6</td> <td>Alloy Steel</td>	17	26	ZZ3-010	Elastic Washer 6	Alloy Steel
20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 26 2 ZZ3M-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 1 Driven Shaft Alloy Steel 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 <td< td=""><td>18</td><td>26</td><td>ZZ3-011</td><td>Washer 6</td><td></td></td<>	18	26	ZZ3-011	Washer 6	
21 1 ZZ3-012 Plug Magnetic M12×1 Steel 22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 1 Drive Shaft Alloy Steel 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 1 Driven Shaft Alloy Steel 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel <td< td=""><td>19</td><td>1</td><td>ZZ3M-0311</td><td>Oil Cover Gear Side</td><td>Aluminum</td></td<>	19	1	ZZ3M-0311	Oil Cover Gear Side	Aluminum
22 1 ZZ3-013 Oil Seal TC 25×40×7 viton 23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 1 Drive Shaft Alloy Steel 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1	20	2	ZZ5M-1206	Lifting Lug	Steel
23 2 ZZ3M-1101 Gear Alloy Steel 24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	21	1	ZZ3-012	Plug Magnetic M12×1	Steel
24 2 ZZ3-014 Keyless Locking Assembly Z3-20×47 Steel 25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 1 Drive Shaft Alloy Steel 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	22	1	ZZ3-013	Oil Seal TC $25 \times 40 \times 7$	viton
25 1 ZZ3L-0500 Drive Rotor Group 1 Impeller Ductile Iron 1 Drive Shaft Alloy Steel 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 1 Driven Shaft Alloy Steel 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	23	2	ZZ3M-1101	Gear	Alloy Steel
1 Impeller Ductile Iron 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	24	2	ZZ3-014	Keyless Locking Assembly Z3-20×47	Steel
1 Drive Shaft Alloy Steel 26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	25	1	ZZ3L-0500	Drive Rotor Group	
26 2 ZZ3M-0702 Bearing Clamp Plate Steel 27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel		1		Impeller	Ductile Iron
27 3 ZZ3-015 Ball Bearing 6304 Steel 28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 1 Driven Shaft Alloy Steel 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel		1		Drive Shaft	Alloy Steel
28 1 ZZ3L-0600 Driven Rotor Group 1 Impeller Ductile Iron 1 Driven Shaft Alloy Steel 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel					
1 Impeller Ductile Iron 1 Driven Shaft Alloy Steel 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel					Steel
1 Driven Shaft Alloy Steel 29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	28	1	ZZ3L-0600		
29 1 ZZ3M-1207 Gasket 0.5 mm 30 1 ZZ3-016 Plug M16×1.5 Steel 31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel		1			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		_			Alloy Steel
31 2 ZZ3-017 O-Ring 14×2.65(ID×CS) viton 32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	29	1	ZZ3M-1207		
32 1 ZZ3M-1209 Breather M12×1 Steel 33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	30	1	ZZ3-016	Plug M16×1.5	Steel
33 1 ZZ3-018 Oil Level Gauge M16×1.5 Steel 34 2 ZZ3-019 Plug M12×1 Steel	31	2	ZZ3-017	O-Ring $14 \times 2.65(ID \times CS)$	viton
34 2 ZZ3-019 Plug M12×1 Steel	32	1	ZZ3M-1209	Breather M12×1	Steel
	33	1	ZZ3-018	Oil Level Gauge M16×1.5	Steel
35 4 $ZZ3-020$ O-Ring $10\times1.8(ID\times CS)$ viton	34	2	ZZ3-019	Plug M12×1	Steel
	35	4	ZZ3-020	O-Ring $10 \times 1.8 (ID \times CS)$	viton

.....

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com



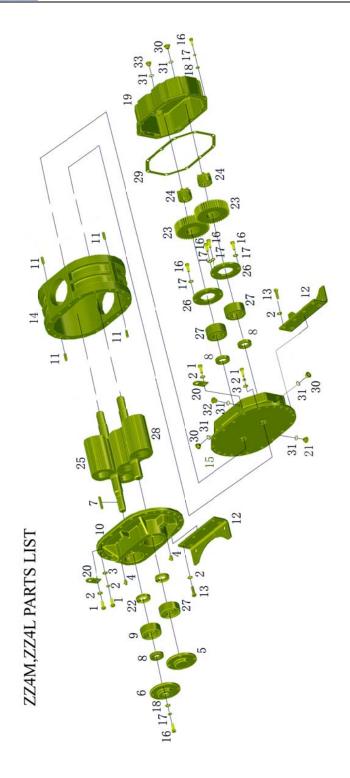



• Model: ZZ4M Parts List

All Configurations

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	24	ZZ4-001	Screw M10×25	Steel
2	32	ZZ4-002	Elastic Washer 10	Alloy Steel
3	22	ZZ4-003	Washer 10	Steel
4	2	ZZ4-004	Grease Fitting M10×1	Brass
5	1	ZZ4M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ4M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ4M-1205	Key-Square	Steel
8	4	ZZ4-005	Oil Seal TC $25 \times 45 \times 7$	viton
9	1	ZZ4-006	Bearing – Roller NJ 2206/C3	Steel
10	1	ZZ4M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ4-007	Dowel Pin B12×40	Steel
12	2	ZZ4M-1202	Mounting Feet –Vertical & Horizontal	Steel
13	8	ZZ4-008	Screw M10×30	Steel
14	1	ZZ4M-0101	Impeller Case	Gray Iron
15	1	ZZ4M-0202	End Plate Gear Side	Gray
16	26	ZZ4-009	Screw M6×20	Steel
17	26	ZZ4-010	Elastic Washer 6	Alloy Steel
18	26	ZZ4-011	Washer 6	Steel
19	1	ZZ4M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ5M-1206	Lifting Lug	Steel
21	1	ZZ4-012	Plug Magnetic M16×1.5	Steel
22	1	ZZ4-013	Oil Seal TC $30 \times 45 \times 7$	viton
23	2	ZZ4M-1101	Gear	Alloy Steel
24	2	ZZ4-014	Keyless Locking Assembly Z3-25×50	Steel
25	1	ZZ4M-0500	Drive Rotor Group	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	2	ZZ4M-0702	Bearing Retainer	Steel
27	3	ZZ4-015	Ball Bearing 5305	Steel
28	1	ZZ4M-0600	Driven Rotor Group	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ4M-1207	Gasket 0.5 mm	
30	3	ZZ4-016	Plug M16×1.5	Steel
31	6	ZZ4-017	O-Ring $14 \times 2.65 (ID \times CS)$	viton
32	1	ZZ5M-1209	Breather M16×1.5	Steel
33	1	ZZ4-018	Oil Level Gauge M16×1.5	Steel

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com




• Model: ZZ4L Parts List

All Configurations

1 24 ZZ4-001 Screw M10×25 Steel 2 32 ZZ4-002 Elastic Washer 10 Alloy Ste 3 22 ZZ4-003 Washer 10 Steel 4 2 ZZ4-004 Grease Fitting M10×1 Brass 5 1 ZZ4M-1203 Drive Side Bearing Cover I Aluminu 6 1 ZZ4M-1204 Drive Side Bearing Cover II Aluminu 7 1 ZZ4M-1205 Key-Square Steel 8 4 ZZ4-005 Oil Seal TC 25×45×7 viton 9 1 ZZ4-006 Bearing – Roller NJ 2206/C3 Steel 10 1 ZZ4-006 Bearing – Roller NJ 2206/C3 Steel 11 4 ZZ4-007 Dowel Pin B12×40 Steel 12 2 ZZ4M-0201 End Plate Drive Side Gray Iro 12 2 ZZ4M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10×30 Steel				0111170110110	
2 32 ZZ4-002 Elastic Washer 10 Alloy Steel 3 22 ZZ4-003 Washer 10 Steel 4 2 ZZ4-004 Grease Fitting M10×1 Brass 5 1 ZZ4M-1203 Drive Side Bearing Cover I Aluminu 6 1 ZZ4M-1204 Drive Side Bearing Cover II Aluminu 7 1 ZZ4M-1205 Key-Square Steel 8 4 ZZ4-005 Oil Seal TC 25×45×7 viton 9 1 ZZ4-006 Bearing - Roller NJ 2206/C3 Steel 10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4-007 Dowel Pin B12×40 Steel 12 2 ZZ4M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10×30 Steel 14 1 ZZ4L-010 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Alloy Steel <t< td=""><td>ITEM</td><td>QTY</td><td>PART NUMBER</td><td>DESCRIPTION</td><td>MATERIAL</td></t<>	ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
3 22 ZZ4-003 Washer 10 Steel 4 2 ZZ4-004 Grease Fitting M10×1 Brass 5 1 ZZ4M-1203 Drive Side Bearing Cover I Aluminu 6 1 ZZ4M-1204 Drive Side Bearing Cover II Aluminu 7 1 ZZ4M-1205 Key-Square Steel 8 4 ZZ4-005 Oil Seal TC 25×45×7 viton 9 1 ZZ4-006 Bearing - Roller NJ 2206/C3 Steel 10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4-007 Dowel Pin B12×40 Steel 12 2 ZZ4M-1202 Mounting Feet - Vertical & Steel Steel 12 2 ZZ4M-1202 Mounting Feet - Vertical & Steel Steel 13 8 ZZ4-008 Screw M10×30 Steel 14 1 ZZ4H-010 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Alloy Steel	1	24	ZZ4-001	Screw M10×25	Steel
4 2 ZZ4-004 Grease Fitting M10×1 Brass 5 1 ZZ4M-1203 Drive Side Bearing Cover I Aluminu 6 1 ZZ4M-1204 Drive Side Bearing Cover II Aluminu 7 1 ZZ4M-1205 Key-Square Steel 8 4 ZZ4-005 Oil Seal TC 25×45×7 viton 9 1 ZZ4-006 Bearing – Roller NJ 2206/C3 Steel 10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4-007 Dowel Pin B12×40 Steel 12 2 ZZ4M-1202 Mounting Feet – Vertical & Steel Steel 12 2 ZZ4M-1202 Mounting Feet – Vertical & Steel Steel 13 8 ZZ4-008 Screw M10×30 Steel 14 1 ZZ4L-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray Iro 16 26 ZZ4-010 Elastic Washer 6 Alloy Ste	2	32	ZZ4-002	Elastic Washer 10	Alloy Steel
5 1 ZZ4M-1203 Drive Side Bearing Cover I Aluminu 6 1 ZZ4M-1204 Drive Side Bearing Cover II Aluminu 7 1 ZZ4M-1205 Key-Square Steel 8 4 ZZ4-005 Oil Seal TC 25×45×7 viton 9 1 ZZ4-006 Bearing - Roller NJ 2206/C3 Steel 10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4-007 Dowel Pin B12×40 Steel 12 2 ZZ4M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10×30 Steel 14 1 ZZ4L-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray Iro 16 26 ZZ4-010 Elastic Washer 6 Alloy Steel 17 26 ZZ4-011 Washer 6 Alloy Steel 18 26 ZZ4-011 Oil Cover Gear Side Alloy Steel </td <td>3</td> <td>22</td> <td>ZZ4-003</td> <td>Washer 10</td> <td>Steel</td>	3	22	ZZ4-003	Washer 10	Steel
6 1 ZZ4M-1204 Drive Side Bearing Cover II Aluminu 7 1 ZZ4M-1205 Key-Square Steel 8 4 ZZ4-005 Oil Seal TC 25×45×7 viton 9 1 ZZ4M-006 Bearing – Roller NJ 2206/C3 Steel 10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4M-0201 End Plate Drive Side Gray Iro 12 2 ZZ4M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10×30 Steel 14 1 ZZ4H-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray Iro 16 26 ZZ4-009 Screw M6×20 Steel 17 26 ZZ4-010 Elastic Washer 6 Alloy Ste 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu	4	2	ZZ4-004	Grease Fitting M10×1	Brass
7 1 ZZ4M-1205 Key-Square Steel 8 4 ZZ4-005 Oil Seal TC 25×45×7 viton 9 1 ZZ4-006 Bearing – Roller NJ 2206/C3 Steel 10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4M-0201 End Plate Drive Side Gray Iro 12 2 ZZ4M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10×30 Steel 14 1 ZZ4L-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray Iro 16 26 ZZ4-010 Elastic Washer 6 Alloy Steel 17 26 ZZ4-009 Screw M6×20 Steel 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21	5	1	ZZ4M-1203	Drive Side Bearing Cover I	Aluminum
8 4 ZZ4-005 Oil Seal TC 25×45×7 viton 9 1 ZZ4-006 Bearing – Roller NJ 2206/C3 Steel 10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4-007 Dowel Pin B12×40 Steel 12 2 ZZ4M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10×30 Steel 14 1 ZZ4L-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray Iro 16 26 ZZ4-009 Screw M6×20 Steel 17 26 ZZ4-010 Elastic Washer 6 Alloy Steel 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22	6	1	ZZ4M-1204	Drive Side Bearing Cover II	Aluminum
9 1 ZZ4-006 Bearing - Roller NJ 2206/C3 Steel 10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4-007 Dowel Pin B12 × 40 Steel 12 2 ZZ4M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10 × 30 Steel 14 1 ZZ4L-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray 16 26 ZZ4-009 Screw M6 × 20 Steel 17 26 ZZ4-010 Elastic Washer 6 Alloy Steel 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16 × 1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30 × 45 × 7 viton <td< td=""><td>7</td><td>1</td><td>ZZ4M-1205</td><td>Key-Square</td><td>Steel</td></td<>	7	1	ZZ4M-1205	Key-Square	Steel
10 1 ZZ4M-0201 End Plate Drive Side Gray Iro 11 4 ZZ4-007 Dowel Pin B12 × 40 Steel 12 2 ZZ4M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10 × 30 Steel 14 1 ZZ4L-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray Iro 16 26 ZZ4-0109 Screw M6 × 20 Steel 17 26 ZZ4-010 Elastic Washer 6 Alloy Steel 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16 × 1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30 × 45 × 7 viton 23 2 ZZ4M-1101 Gear Alloy Steel 24	8	4	ZZ4-005	Oil Seal TC $25 \times 45 \times 7$	viton
11 4 ZZ4-007 Dowel Pin B12×40 Steel 12 2 ZZ4M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ4-008 Screw M10×30 Steel 14 1 ZZ4L-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray 16 26 ZZ4-009 Screw M6×20 Steel 17 26 ZZ4-010 Elastic Washer 6 Alloy Ste 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4-014 Keyless Locking Assembly Z3-25×50 Steel 25	9	1	ZZ4-006	Bearing – Roller NJ 2206/C3	Steel
12	10	1	ZZ4M-0201	End Plate Drive Side	Gray Iron
12	11	4	ZZ4-007	Dowel Pin B12×40	Steel
14 1 ZZ4L-0101 Impeller Case Gray Iro 15 1 ZZ4M-0202 End Plate Gear Side Gray 16 26 ZZ4-009 Screw M6×20 Steel 17 26 ZZ4-010 Elastic Washer 6 Alloy Ste 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4H-014 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group 1 1 Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 530	12	2	ZZ4M-1202	_	Steel
15 1 ZZ4M-0202 End Plate Gear Side Gray 16 26 ZZ4-009 Screw M6×20 Steel 17 26 ZZ4-010 Elastic Washer 6 Alloy Steel 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4H-014 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 28 1 ZZ4L-0600 D	13	8	ZZ4-008	Screw M10×30	Steel
16 26 ZZ4-009 Screw M6×20 Steel 17 26 ZZ4-010 Elastic Washer 6 Alloy Ste 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Steel 24 2 ZZ4M-1101 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group Drive Shaft Alloy Steel 25 1 ZZ4M-0702 Bearing Retainer Steel 26 2 ZZ4M-015 Ball Bearing 5305 Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4M-0600 Driven Rotor Group Driven Shaft Alloy	14	1	ZZ4L-0101	Impeller Case	Gray Iron
17 26 ZZ4-010 Elastic Washer 6 Alloy Ste 18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4M-1101 Gear Alloy Ste 25 1 ZZ4L-0500 Drive Rotor Group Steel 25 1 ZZ4L-0500 Drive Rotor Group Ductile Ir 1 Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir Driven Shaft	15	1	ZZ4M-0202	End Plate Gear Side	Gray
18 26 ZZ4-011 Washer 6 Steel 19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4-014 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS)	16	26	ZZ4-009	Screw M6×20	Steel
19 1 ZZ4M-0311 Oil Cover Gear Side Aluminu 20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4-014 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group 1 1 Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	17	26	ZZ4-010	Elastic Washer 6	Alloy Steel
20 2 ZZ5M-1206 Lifting Lug Steel 21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4-014 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group 1 1 Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	18	26	ZZ4-011		Steel
21 1 ZZ4-012 Plug Magnetic M16×1.5 Steel 22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4-014 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group 1 1 Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton					Aluminum
22 1 ZZ4-013 Oil Seal TC 30×45×7 viton 23 2 ZZ4M-1101 Gear Alloy Ste 24 2 ZZ4-014 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group Ductile Ir 1 1 Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	20		ZZ5M-1206	Lifting Lug	Steel
23 2 ZZ4M-1101 Gear Keyless Locking Assembly Z3-25×50 Alloy Steel 24 2 ZZ4L-0500 Drive Rotor Group Steel 25 1 ZZ4L-0500 Drive Rotor Group 1 Impeller Ductile Ir 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	21	1	ZZ4-012	Plug Magnetic M16×1.5	Steel
24 2 ZZ4-014 Keyless Locking Assembly Z3-25×50 Steel 25 1 ZZ4L-0500 Drive Rotor Group 1 Impeller Ductile Ir 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 1 Driven Shaft Alloy Steel 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	22	1	ZZ4-013	Oil Seal TC $30 \times 45 \times 7$	viton
ZEAUTION ZEAUTION ZEAUTION Steel 25 1 ZZAL-0500 Drive Rotor Group 1 Impeller Ductile Ir 1 Drive Shaft Alloy Steel 26 2 ZZAM-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	23	2	ZZ4M-1101		Alloy Steel
1 Impeller Ductile Ir 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	24	2	ZZ4-014		Steel
1 Drive Shaft Alloy Ste 26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	25	1	ZZ4L-0500	Drive Rotor Group	
26 2 ZZ4M-0702 Bearing Retainer Steel 27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton		1		Impeller	Ductile Iron
27 3 ZZ4-015 Ball Bearing 5305 Steel 28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton					Alloy Steel
28 1 ZZ4L-0600 Driven Rotor Group 1 Impeller Ductile Ir 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton					
1 Impeller Ductile Ir 1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton					Steel
1 Driven Shaft Alloy Ste 29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton	28	-	ZZ4L-0600	*	
29 1 ZZ4M-1207 Gasket 0.5 mm 30 3 ZZ4-016 Plug M16×1.5 Steel 31 6 ZZ4-017 O-Ring 14×2.65(ID×CS) viton					Ductile Iron
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$					Alloy Steel
31 6 ZZ4-017 O-Ring 14×2.65 (ID×CS) viton	_	-			
				· · · · · · · · · · · · · · · · · · ·	
	31	6	ZZ4-017		viton
32 1 ZZ5M-1209 Breather M16 \times 1.5 Steel	32	1	ZZ5M-1209	Breather M16×1.5	Steel
33 1 $ZZ4-018$ Oil Level Gauge M16 \times 1.5 Steel	33	1	ZZ4-018	Oil Level Gauge M16×1.5	Steel

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com



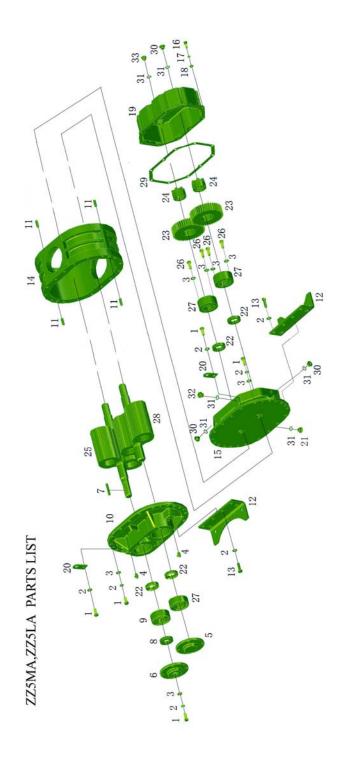



• Model: ZZ5MA Parts List

All Configurations

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	32	ZZ5-001	Screw M10×30	Steel
2	40	ZZ5-002	Elastic Washer 10	Alloy Steel
3	38	ZZ5-003	Washer 10	Steel
4	2	ZZ5-004	Grease Fitting M10×1	Brass
5	1	ZZ5M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ5M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ5M-1205	Key-Square	Steel
8	1	ZZ5-005	Oil Seal TC $30 \times 50 \times 11$	viton
9	1	ZZ5-006	Bearing – Roller NJ 2307/C3	Steel
10	1	ZZ5M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ5-007	Dowel Pin B12×40	Steel
12	2	ZZ5M-1202A	Mounting Feet –Vertical & Horizontal	Steel
13	8	ZZ5-008	Screw M10×35	Steel
14	1	ZZ5M-0101	Impeller Case	Gray Iron
15	1	ZZ5M-0202	End Plate Gear Side	Gray Iron
16	10	ZZ5-009	Screw M8×25	Steel
17	10	ZZ5-010	Elastic Washer 8	Alloy Steel
18	10	ZZ5-011	Washer 8	Steel
19	1	ZZ5M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ5M-1206	Lifting Lug	Steel
21	1	ZZ5-012	Plug Magnetic M16×1.5	Steel
22	4	ZZ5-013	Oil Seal TC $35 \times 55 \times 11$	viton
23	2	ZZ5M-1101	Gear	Alloy Steel
24	2	ZZ5-014	Keyless Locking Assembly Z3-30×55	Steel
25	1	ZZ5M-0500	Drive Rotor Group	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	4	ZZ5-015	Screw M10×20	Steel
27	3	ZZ5-016	Ball Bearing 5307	Steel
28	1	ZZ5M-0600	Driven Rotor Group	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ5M-1207	Gasket 0.5 mm	
30	3	ZZ5-017	Plug M16×1.5	Steel
31	6	ZZ5-018	O-Ring $14 \times 2.65(ID \times CS)$	viton
32	1	ZZ5M-1209	Breather M16×1.5	Steel
33	1	ZZ5-019	Oil Level Gauge M16×1.5	Steel

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com




• Model: ZZ5LA Parts List

All Configurations

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	32	ZZ5-001	Screw M10×30	Steel
2	40	ZZ5-002	Elastic Washer 10	Alloy Steel
3	38	ZZ5-003	Washer 10	Steel
4	2	ZZ5-004	Grease Fitting M10×1	Brass
5	1	ZZ5M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ5M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ5M-1205	Key-Square	Steel
8	1	ZZ5-005	Oil Seal TC $30 \times 50 \times 11$	viton
9	1	ZZ5-006	Bearing – Roller NJ 2307/C3	Steel
10	1	ZZ5M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ5-007	Dowel Pin B12×40	Steel
12	2	ZZ5M-1202A	Mounting Feet –Vertical & Horizontal	Steel
13	8	ZZ5-008	Screw M10×35	Steel
14	1	ZZ5L-0101	Impeller Case	Gray Iron
15	1	ZZ5M-0202	End Plate Gear Side	Gray Iron
16	10	ZZ5-009	Screw M8×25	Steel
17	10	ZZ5-010	Elastic Washer 8	Alloy Steel
18	10	ZZ5-011	Washer 8	Steel
19	1	ZZ5M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ5M-1206	Lifting Lug	Steel
21	1	ZZ5-012	Plug Magnetic M16×1.5	Steel
22	4	ZZ5-013	Oil Seal TC $35 \times 55 \times 11$	viton
23	2	ZZ5M-1101	Gear	Alloy Steel
24	2	ZZ5-014	Keyless Locking Assembly Z3-30×55	Steel
25	1	ZZ5L-0500	Drive Rotor Group	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	4	ZZ5-015	Screw M10×20	Steel
27	3	ZZ5-016	Ball Bearing 5307	Steel
28	1	ZZ5L-0600	Driven Rotor Group	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ5M-1207	Gasket 0.5 mm	
30	3	ZZ5-017	Plug M16 \times 1.5	Steel
31	6	ZZ5-018	O-Ring $14 \times 2.65(ID \times CS)$	viton
32	1	ZZ5M-1209	Breather M16×1.5	Steel
33	1	ZZ5-019	Oil Level Gauge M16×1.5	Steel

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com



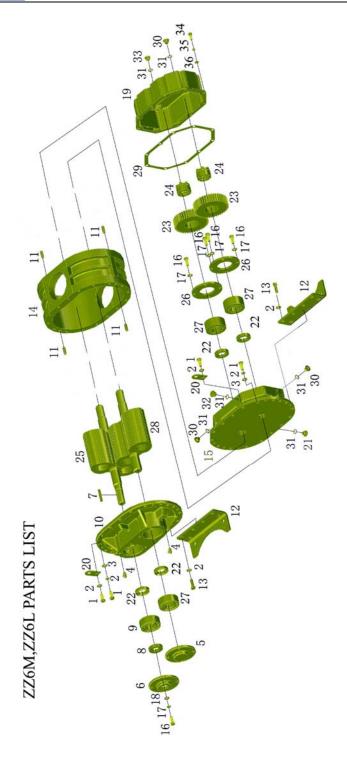



• Model: ZZ6M Parts List

All Configurations

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	24	ZZ6-001	Screw M12×35	Steel
2	32	ZZ6-002	Elastic Washer 12	Alloy Steel
3	22	ZZ6-003	Washer 12	Steel
4	2	ZZ6-004	Grease Fitting M10×1	Brass
5	1	ZZ6M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ6M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ6M-1205	Key-Square	Steel
8	1	ZZ6-005	Oil Seal TB 38×58×11	viton
9	1	ZZ6-006	Bearing – Roller NJ 2308/C3	Steel
10	1	ZZ6M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ6-007	Dowel Pin B12×40	Steel
12	2	ZZ6M-1202	Mounting Feet –Vertical & Horizontal	Steel
13	8	ZZ6-008	Screw M12×45	Steel
14	1	ZZ6M-0101	Impeller Case	Gray Iron
15	1	ZZ6M-0202	End Plate Gear Side	Gray
16	16	ZZ6-009	Screw M10×25	Steel
17	16	ZZ6-010	Elastic Washer 10	Alloy Steel
18	8	ZZ6-011	Washer 10	Steel
19	1	ZZ6M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ6M-1206	Lifting Lug	Steel
21	1	ZZ6-012	Plug Magnetic M20×1.5	Steel
22	4	ZZ6-013	Oil Seal TB $40 \times 62 \times 12$	viton
23	2	ZZ6M-1101	Gear	Alloy Steel
24	2	ZZ6-014	Keyless Locking Assembly Z3-40×65	Steel
25	1	ZZ6M-0500	Drive Rotor Group	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	2	ZZ6M-0702	Bearing Retainer	Steel
27	3	ZZ6-015	Ball Bearing 5308	Steel
28	1	ZZ6M-0600	Driven Rotor Group	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ6M-1207	Gasket 0.5 mm	
30	3	ZZ6-016	Plug M20×1.5	Steel
31	6	ZZ6-017	O-Ring $18 \times 2.65(ID \times CS)$	viton
32	1	ZZ7M-1209	Breather M20×1.5	Steel
33	1	ZZ6-018	Oil Level Gauge M20×1.5	Steel
34	10	ZZ6-019	Screw M8×25	Steel
35	10	ZZ6-020	Elastic Washer 8	Alloy Steel
36	10	ZZ6-021	Washer 8	Steel

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 47




• Model: ZZ6L Parts List

All Configurations

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	24	ZZ6-001	Screw M12×35	Steel
2	32	ZZ6-002	Elastic Washer 12	Alloy Steel
3	22	ZZ6-003	Washer 12	Steel
4	2	ZZ6-004	Grease Fitting M10×1	Brass
5	1	ZZ6M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ6M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ6M-1205	Key-Square	Steel
8	1	ZZ6-005	Oil Seal TB 38×58×11	viton
9	1	ZZ6-006	Bearing – Roller NJ 2308/C3	Steel
10	1	ZZ6M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ6-007	Dowel Pin B12×40	Steel
12	2	ZZ6M-1202	Mounting Feet –Vertical & Horizontal	Steel
13	8	ZZ6-008	Screw M12×45	Steel
14	1	ZZ6M-0101	Impeller Case	Gray Iron
15	1	ZZ6M-0202	End Plate Gear Side	Gray
16	16	ZZ6-009	Screw M10×25	Steel
17	16	ZZ6-010	Elastic Washer 10	Alloy Steel
18	8	ZZ6-011	Washer 10	Steel
19	1	ZZ6M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ6M-1206	Lifting Lug	Steel
21	1	ZZ6-012	Plug Magnetic M20×1.5	Steel
22	4	ZZ6-013	Oil Seal TB $40 \times 62 \times 12$	viton
23	2	ZZ6M-1101	Gear	Alloy Steel
24	2	ZZ6-014	Keyless Locking Assembly Z3-40×65	Steel
25	1	ZZ6L-0500	Drive Rotor Group	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	2	ZZ6M-0702	Bearing Retainer	Steel
27	3	ZZ6-015	Ball Bearing 5308	Steel
28	1	ZZ6L-0600	Driven Rotor Group	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ6M-1207	Gasket 0.5 mm	
30	3	ZZ6-016	Plug M20×1.5	Steel
31	6	ZZ6-017	O-Ring $18 \times 2.65(ID \times CS)$	viton
32	1	ZZ7M-1209	Breather M20×1.5	Steel
33	1	ZZ6-018	Oil Level Gauge M20×1.5	Steel
34	10	ZZ6-019	Screw M8×25	Steel
35	10	ZZ6-020	Elastic Washer 8	Alloy Steel
36	10	ZZ6-021	Washer 8	Steel

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com Pg. 48



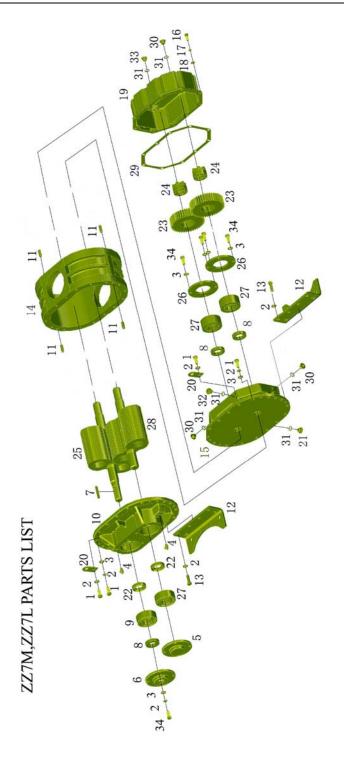



ZZ7M Parts List

All Configurations

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	24	ZZ7-001	Screw M12×35	Steel
2	48	ZZ7-002	Elastic Washer 12	Alloy Steel
3	30	ZZ7-003	Washer 12	Steel
4	2	ZZ7-004	Grease Fitting M10×1	Brass
5	1	ZZ7M-1203	Drive Side Bearing Cover I	Aluminum
6	1	ZZ7M-1204	Drive Side Bearing Cover II	Aluminum
7	1	ZZ7M-1205	Key-Square	Steel
8	4	ZZ7-005	Oil Seal TB $42 \times 65 \times 10$	viton
9	1	ZZ7-006	Bearing – Roller NJ 2309/C3	Steel
10	1	ZZ7M-0201	End Plate Drive Side	Gray Iron
11	4	ZZ7-007	Dowel Pin B12×40	Steel
12	2	ZZ7M-1202	Mounting Feet –Vertical & Horizontal	Steel
13	8	ZZ7-008	Screw M12×45	Steel
14	1	ZZ7M-0101	Impeller Case	Gray Iron
15	1	ZZ7M-0202	End Plate Gear Side	Gray
16	26	ZZ7-009	Screw M10×30	Steel
17	26	ZZ7-010	Elastic Washer 10	Alloy Steel
18	26	ZZ7-011	Washer 10	Steel
19	1	ZZ7M-0311	Oil Cover Gear Side	Aluminum
20	2	ZZ6M-1206	Lifting Lug	Steel
21	1	ZZ7-012	Plug Magnetic M20×1.5	Steel
22	1	ZZ7-013	Oil Seal TB $45 \times 75 \times 8$	viton
23	2	ZZ7M-1101	Gear	Alloy Steel
24	2	ZZ7-014	Keyless Locking Assembly Z3-45×75	Steel
25	1	ZZ7M-0500	Drive Rotor Group	
	1		Impeller	Ductile Iron
	1		Drive Shaft	Alloy Steel
26	2	ZZ7M-0702	Bearing Retainer	Steel
27	3	ZZ7-015	Ball Bearing 5309	Steel
28	1	ZZ7M-0600	Driven Rotor Group	
	1		Impeller	Ductile Iron
	1		Driven Shaft	Alloy Steel
29	1	ZZ7M-1207	Gasket 0.5 mm	
30	3	ZZ7-016	Plug M20×1.5	Steel
31	6	ZZ7-017	O-Ring $18 \times 2.65(ID \times CS)$	viton
32	1	ZZ5M-1209	Breather M20×1.5	Steel
33	1	ZZ7-018	Oil Level Gauge M20×1.5	Steel
34	16	ZZ7-018	Screw M12×30	Steel

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com



• Model: ZZ7L Parts List

All Configurations

TTEM	teel s um um
2 48 ZZ7-002 Elastic Washer 12 Alloy St 3 30 ZZ7-003 Washer 12 Steel 4 2 ZZ7-004 Grease Fitting M10×1 Brass 5 1 ZZ7M-1203 Drive Side Bearing Cover I Aluming 6 1 ZZ7M-1204 Drive Side Bearing Cover II Aluming 7 1 ZZ7M-1205 Key-Square Steel 8 4 ZZ7-005 Oil Seal TB 42×65×10 viton 9 1 ZZ7-006 Bearing - Roller NJ 2309/C3 Steel 10 1 ZZ7M-0201 End Plate Drive Side Gray In 11 4 ZZ7-006 Bearing - Roller NJ 2309/C3 Steel 12 2 ZZ7M-0201 End Plate Drive Side Gray In 11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel	teel S um um
3 30 ZZ7-003 Washer 12 Steel 4 2 ZZ7-004 Grease Fitting M10×1 Brass 5 1 ZZ7M-1203 Drive Side Bearing Cover I Alumin 6 1 ZZ7M-1204 Drive Side Bearing Cover II Alumin 7 1 ZZ7M-1205 Key-Square Steel 8 4 ZZ7-005 Oil Seal TB 42×65×10 viton 9 1 ZZ7-006 Bearing – Roller NJ 2309/C3 Steel 10 1 ZZ7M-0201 End Plate Drive Side Gray In 11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet – Vertical & Steel Steel 12 2 ZZ7M-1202 Mounting Feet – Vertical & Steel Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray In 15 1 ZZ7M-0202 End Plate Gear Side Gray	s um um
4 2 ZZ7-004 Grease Fitting M10×1 Brass 5 1 ZZ7M-1203 Drive Side Bearing Cover I Alumin 6 1 ZZ7M-1204 Drive Side Bearing Cover II Alumin 7 1 ZZ7M-1205 Key-Square Steel 8 4 ZZ7-005 Oil Seal TB 42×65×10 viton 9 1 ZZ7-006 Bearing - Roller NJ 2309/C3 Steel 10 1 ZZ7M-0201 End Plate Drive Side Gray Ir 11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet - Vertical & Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray Ir 15 1 ZZ7M-0202 End Plate Gear Side Gray Ir 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St	um um
5 1 ZZ7M-1203 Drive Side Bearing Cover I Aluming 6 1 ZZ7M-1204 Drive Side Bearing Cover II Aluming 7 1 ZZ7M-1205 Key-Square Steel 8 4 ZZ7-005 Oil Seal TB 42×65×10 viton 9 1 ZZ7-006 Bearing – Roller NJ 2309/C3 Steel 10 1 ZZ7M-0201 End Plate Drive Side Gray In 11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet – Vertical & Steel Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray In 15 1 ZZ7M-0202 End Plate Gear Side Gray In 16 26 ZZ7-0109 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 2	um um
6 1 ZZ7M-1204 Drive Side Bearing Cover II Aluming 7 1 ZZ7M-1205 Key-Square Steel 8 4 ZZ7-005 Oil Seal TB 42×65×10 viton 9 1 ZZ7-006 Bearing – Roller NJ 2309/C3 Steel 10 1 ZZ7M-0201 End Plate Drive Side Gray In 11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray In 15 1 ZZ7M-0202 End Plate Gear Side Gray 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Alumin 20	um
7 1 ZZ7M-1205 Key-Square Steel 8 4 ZZ7-005 Oil Seal TB 42×65×10 viton 9 1 ZZ7-006 Bearing – Roller NJ 2309/C3 Steel 10 1 ZZ7M-0201 End Plate Drive Side Gray Ir 11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray Ir 15 1 ZZ7M-0202 End Plate Gear Side Gray Ir 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Alumin 20 2 ZZ6M-1206 Lifting Lug Steel 21 1	
8 4 ZZ7-005 Oil Seal TB 42×65×10 viton 9 1 ZZ7-006 Bearing – Roller NJ 2309/C3 Steel 10 1 ZZ7M-0201 End Plate Drive Side Gray In 11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray In 15 1 ZZ7M-0202 End Plate Gear Side Gray In 15 1 ZZ7M-0202 End Plate Gear Side Gray In 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Alumin 20 2 ZZ6M-1206 Lifting Lug Steel 21	
9 1 ZZ7-006 Bearing – Roller NJ 2309/C3 Steel 10 1 ZZ7M-0201 End Plate Drive Side Gray In 11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray In 15 1 ZZ7M-0202 End Plate Gear Side Gray 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Alumin 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23	
10 1 ZZ7M-0201 End Plate Drive Side Gray Interest In Interest Int	ı
11 4 ZZ7-007 Dowel Pin B12×40 Steel 12 2 ZZ7M-1202 Mounting Feet – Vertical & Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray Interpretation 15 1 ZZ7M-0202 End Plate Gear Side Gray 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Aluming 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Steel	
12 2 ZZ7M-1202 Mounting Feet -Vertical & Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray Irr 15 1 ZZ7M-0202 End Plate Gear Side Gray 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Aluming 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	on
12 2 ZZ/M-1202 Horizontal Steel 13 8 ZZ7-008 Screw M12×45 Steel 14 1 ZZ7M-0101 Impeller Case Gray Interpretation 15 1 ZZ7M-0202 End Plate Gear Side Gray 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Aluming 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	
14 1 ZZ7M-0101 Impeller Case Gray Interest of End Plate Gear Side Alloy St Alloy St Masher 10 Steel Alloy St Alloy St Steel Alloy St	
15 1 ZZ7M-0202 End Plate Gear Side Gray 16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Aluming 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	<u> </u>
16 26 ZZ7-009 Screw M10×30 Steel 17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Aluming 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	on
17 26 ZZ7-010 Elastic Washer 10 Alloy St 18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Aluming 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	
18 26 ZZ7-011 Washer 10 Steel 19 1 ZZ7M-0311 Oil Cover Gear Side Aluming 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	
19 1 ZZ7M-0311 Oil Cover Gear Side Aluming 20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	teel
20 2 ZZ6M-1206 Lifting Lug Steel 21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	
21 1 ZZ7-012 Plug Magnetic M20×1.5 Steel 22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	um
22 1 ZZ7-013 Oil Seal TB 45×75×8 viton 23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	-
23 2 ZZ7M-1101 Gear Alloy St 24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	
24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	1
24 2 ZZ7-014 Keyless Locking Assembly Z3-45×75 Steel	teel
25 1 7771_0500 Drive Poter Group	
25 I ZZ/L-0500 DIIVE KUUI GIUUP	
1 Impeller Ductile I	ron
1 Drive Shaft Alloy St	teel
26 2 ZZ7M-0702 Bearing Retainer Steel	
27 3 ZZ7-015 Ball Bearing 5309 Steel	
28 1 ZZ7L-0600 Driven Rotor Group	
1 Impeller Ductile I	
1 Driven Shaft Alloy St	teel
29 1 ZZ7M-1207 Gasket 0.5 mm	
30 3 ZZ7-016 Plug M20×1.5 Steel	
31 6 ZZ7-017 O-Ring 18×2.65(ID×CS) viton	
32 1 ZZ5M-1209 Breather M20×1.5 Steel	
33 1 ZZ7-018 Oil Level Gauge M20×1.5 Steel	l
34 16 ZZ7-018 Screw M12×30 Steel	l

Eurus Blower, Inc. http://www.eurusblower.com E-mail: sales@eurusblower.com



13. Maintenance Schedule Sheet

Rotary blower:	Serial Number:				
Date	Description of work	Service hours	Signature		
	1				