

# Radio Interface Cable


For NCS-C250 Mobile Multi-Switcher

NCS Model Number

## NCS-250-MBA-XX

### Compatible Radios:

CDM750	CM200	EM400	GM398	GM3188	M208	PM400	GTX
CDM1250	CM300	GM300	GM399	GM3688	M216	SM50	CM200d
CDM1550	CM340	GM338	GM600	M10	M1225	SM120	CM300d
CM140	CM360	GM339	GM950	M120	MCX760	MaxTrac	XPR2500
CM160	EM200	GM350	GM1200	M130	MCX780	PRO5100	

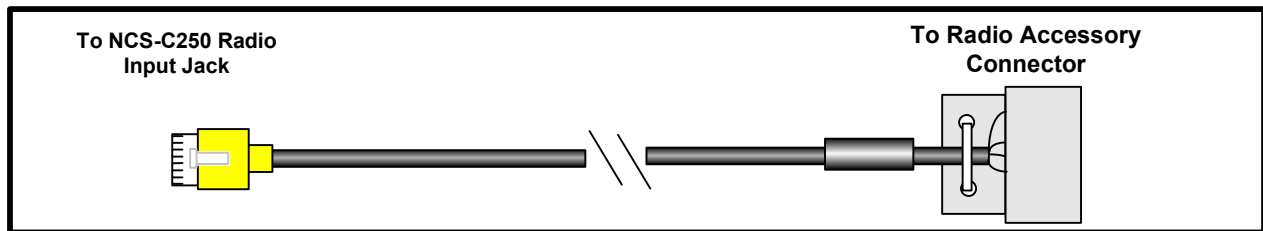

### RJ-45

Pin #	Wire Color	Function
1	White	Mic Hi
2	Green	Mic Lo
3	Brown	PTT
4	Black	Ground
5	Yellow	Rx Audio
6	Shield	Ground
7	Red	Hook Switch*
8	Orange	COR*

\*Active only if Option is installed.

### Motorola HLN9457 Connector Kit

1	NC
2	White (Mic Hi)
3	Brown (PTT)
4	NC
5	NC
6	NC
7	Green/Black (Ground)
8	Orange (COR)
9	NC
10	NC
11	Yellow (RX Audio)
12	NC
13	NC
14	RED (Hook Switch)
15	NC
16	NC

## Cable Wiring

### Note:

Radio may require that certain accessory connector pins be appropriately programmed to match pin-out of Radio Interface Cable.