

JULY 2021

Pristine

Roller Shade MSRP



Photograph courtesy of Phifer



Proudly Made In America

PORTER PRESTON

Quality Wholesale Window Coverings
Contract • Hospitality • Residential

www.porterpreston.com • Tel: 866-753-1113 • Fax: 203-597-8828 • email: customerservice@porterpreston.com

Table of Contents

Page

Measuring & Ordering

Selecting the Type of Mounting.....	1
Fabric Deductions & Light Gaps.....	1
The Wrap-Do I add the fabric that wraps around the tube?.....	2
Fabric Tracking & Telescoping.....	2
Railroading.....	2
Wide Shades.....	2
Seams.....	2
Regular Roll or Reverse Roll?.....	2
Safety Hold Tension Device.....	3

Shade Options

Clutch and Bracket Selection.....	4
Roller Shade Control Options.....	
Clutch.....	5
Spring Assist.....	5-6
Chain Options.....	6
Cordless Spring Rollers.....	7-8
Spring Roller Shade.....	9
Hem Bar Options.....	9
Skyline Bottom Up Roller Shades.....	10
Roller Shade Valance Closure Options.....	
Soft Valance.....	11
Inserted Fabric Valance.....	11
3" Uncovered Skyline Fascia Valance.....	11
3" & 4" Uncovered Square Aluminum Fascia Valance.....	12
3", 4" and 5" Fabric Wrapped Square Fascia Valance.....	12
Universal 5" Fascia System.....	13
7" Square Fascia System.....	14
Cassette 100 and Cassette 120.....	15-16
Lower Access Fascia/Flap & Hanger.....	17
3", 4", 5", 6" Shade Box Valance with Bottom Closure.....	18
Side Rails, Sill Channel & Zip Tracks.....	19

Motorization

Somfy Battery Powered Motors & Controls.....	20-22
Somfy Rechargeable Solar Battery Pack.....	23
Wired.....	24-26
Controls.....	27-28
myLink RTS Smartphone and Tablet Interface.....	29-30
Rollease Automate Radio Communication.....	31-33
QMotion.....	34-35

Shade Material

Solar Screens, Translucents, Blackouts.....	36
The Glow Effect.....	37
Shade Roll-Up Diameters.....	37
Roller Shade Fabrication Chart.....	38
Fabric Specifications.....	39-40

MSRP	41-51
-------------------	-------

Warranty	52
-----------------------	----

Selecting the Type of Mounting

Determine whether the roller shade is going to be installed inside the window frame or outside the window frame.

Inside Mount (IM) or Inside Bracket (IB)

Inside mount installations are mounted inside a window frame or some other recessed area.

Measuring Width and Length for Inside Mount

Width: measure across the top, middle, and bottom of the window opening. Using the narrowest dimension, measure to the nearest 1/8". By using the narrowest measurement the shade will operate correctly.

Length: measure the vertical dimension of the left, center and right side. Use the longer measurement, measure to the nearest 1/8". The factory will make the appropriate deductions from your measurements on both the tube and the fabric. Do not make any width or length deductions or additions.

Outside Mount (OM) or Outside Bracket (OB)

Outside mount installations are mounted on the wall, ceiling or on the window molding.

Measuring Width and Length for Outside Mount

Width: measure the width of the window opening from left to right and add as many inches as desired for maximum light gap coverage and privacy. If the shade is to be mounted to trim or framing around the window measure from the trim's outside edge left to right. The factory will make deductions from your measurements on both the barrel and fabric. Once you determine the desired width, round to the nearest 1/8".

Length: measure the window opening from top to bottom and add as many inches as desired to this measurement to allow space for mounting brackets above the opening and enough overlap at the bottom to avoid a light gap. Once you determine the desired height, round it to the nearest 1/8". The factory will make the appropriate allowance for the fabric wrap on the roller tube. If there is trim or framing around the window, measure from the trim's outside edge top to bottom, provided the trim provides the flat space required for an outside mount. If not you can mount the shade to the wall above the trim. In addition, if the window sill protrudes outside the window opening at the bottom of the window measure just to the bottom of the sill.

Confirming Measurements

It is standard to order width first and length second. The most common error in ordering roller shades is reversing the width and length measurements. Always confirm that the width is the measurement that goes across from left to right and that the length is the measurement that goes from top to bottom.


Fabric Deductions & Light Gaps

It is extremely important to note when measuring for roller shades that the actual fabric width of the shade will be less than the window measurement provided. To allow for the space that the shade brackets, clutch or motor, and the idler end take up, the factory must make a deduction so that the finished measurement or bracket to bracket measurement of the shade fits into the width dimension provided.

Please note the below deductions taken by the factory for roller shades without valances.

Type of Shade Operation	Fabric Width Deduction
Metal Spring Roller OB	-1"
Metal Spring Roller IB	-1"
R-Series Clutch 1 1/4" tube OB	-1 1/4"
R-Series Clutch 1 1/4" tube IB	-1 3/8"
R-Series Clutch 1 1/2" tube OB	-1 3/8"
R-Series Clutch 1 1/2" tube IB	-1 1/2"
R-Series Clutch 2" tube OB	-1 1/2"
R-Series Clutch 2" tube IB	-1 5/8"
Skyline Clutch OB	-1 1/4"
Skyline Clutch IB	-1 3/8"

Please Note: When a shade is over 100" in width or length an additional 1/8" is deducted from the fabric width

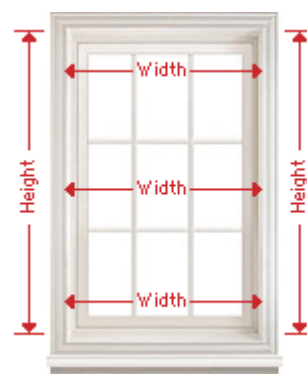

IB Measuring



OB Measuring

Shade Measurements: (Critical Note)

If a specific fabric width is required, please make it explicitly known that this is fabric width. We suggest that this only be done for outside mounts.

Measure Twice.....Because We Cut Once!

"The Wrap" - do I have to add the fabric that wraps around the tube?

The wrap is the amount of fabric that is added to the window opening length by the factory. The wrap will be added to the window opening size. When measuring the length of the shade measure from the top to the bottom of the window opening. Do not include any extra for the wrap, as this extra material is included automatically by the factory. The standard wrap for motorized and clutch roller shades is 10". The standard wrap for spring roller shades is 12".

Fabric Tracking & Telescoping

Roller shades that exceed a 3 to 1 length to width ratio meaning the shade is more than 3 times longer than it is wide, may have problems tracking or rolling up straight (think of putting paper towels back on the roll). This tracking issue, commonly referred to as telescoping, is an inherent characteristic of roller shade fabrics and should be explained to the end user.

Railroading

In order to make a shade that is wider than the fabric roll width, the fabric will be railroaded or turned sideways and cut to the width of the shade. Note: when railroaded you may see "curling" on the outer vertical edges of the shade. If curling is objectionable consider using a different wider fabric or battens (See Price Grid 11 page 39)

Wide Shades Shades over 126" may exhibit certain aesthetic characteristics such as smile lines, waves, wrinkling on the tube that could result in permanent damage to the fabric. Please consider speaking to Customer Service about splitting your shade with the use of couplers.

Seams In cases where the fabric is wider *and* longer than the width of the fabric roll, a second piece of fabric will be cut and welded (spliced) to the first fabric piece. A "Roman Look Roller Shade" is a perfect way to hide a seam as Pristine's joint seams and "Roman Look" seams are practically indistinguishable.

Roller Shades... Regular Roll or Reverse Roll ?

Regular Roll

Regular roll shades indicate that the shade fabric rolls off the back of the roller tube. The shade cloth will be closest to the window with this option.


Regular roll shades are industry standard and yield the highest levels of energy conservation because of the shade's close proximity to the glass.

Reverse Roll


Reverse roll shades indicate that the shade fabric rolls off the front of the roller tube. The shade cloth will be furthest away from the window with this option.

Reverse roll shades are most commonly used for the following applications:

- To avoid window obstruction (door handle, etc.)
- To reduce light gaps for corner or bay windows



Telescoping and Tracking



Regular Roll



Reverse Roll

RollEase®


SafetyHold™

Bead Chain or Cord Loop Hold Down Device



Safety Instructions:

A WCMA 5.2.3 Warning Tag (available from RollEase®) must be fastened to the device prior to shipping.



The SafetyHold3 must be secured to the clutch or headrail to make the shade inoperable without purposeful action of installer.



Use appropriate anchors when installing.

Installation Instructions:

To ensure safety, SafetyHold3 must be installed properly following these five steps.



Thread bead chain (or cord) through base and around guide (flat side of base facing guide).



Push insert into guide until rounded edge is resting on the bead chain. (For cord, flip insert so opposite side with serrated edge is resting on cord.)



Squeeze guide legs while sliding spring over guide completely. (Be sure spring is all the way over the legs of the guide).



Slide base, flat side down, over curved end of guide.



Using screws provided, attach to wall, allowing some slack for bead chain connectors to slide through easily.

Patented Device:

RollEase offers this patented device for cord loops and bead chain loops. SafetyHold3 complies with the WCMA-ANSI standard 6.5 that requires a hold-down device to make the shade partially inoperable unless the hold-down device is installed.

The hold-down device is designed for continuous cord or bead chain loops that allows stop balls and/or connectors to pass through.

Parts Included:



Test Data:

- Meets WCMA standards for hold down devices.
- Tested to ensure 10 year life of product.



Child Safety

Child safety is of the utmost importance to Porter Preston. That's why we use warning tags and warning labels to highlight the potential hazards of corded window coverings. The tags and labels are attached to every one of our corded window treatment products. Porter Preston suggests choosing cordless alternatives or products with inaccessible cords.


Window Cord Safety

Parents and caregivers should pay close attention to window cord safety and the danger of children becoming accidentally entangled and possibly strangled in the window cords. Strangulation can occur when a child or pet places his or her neck between the exposed lift cord and the fabric on the back side of the shade.


Clutch & Bracket Selection

To determine the clutch and tube used by the factory for a specific shade, refer to the **Roller Shade Fabrication Chart** on page 38.

R Series clutch and pin colors are black & white ♦ R Series bracket colors are zinc, black and white ♦
R Series fascia bracket colors are gray, black, bronze, vanilla and white ♦ R Series square fascia face plate colors are silver, black, bronze, vanilla and white

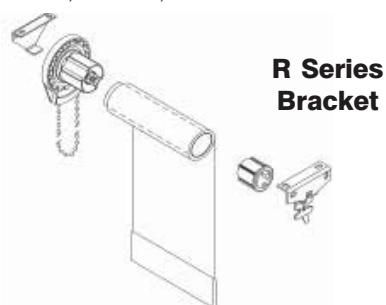

R Series Bracket

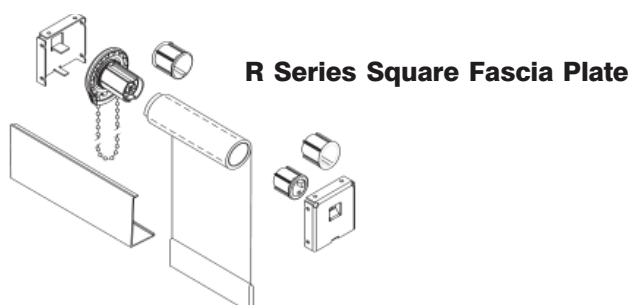


R Series Square Fascia Plate

Skyline clutch and pin colors are black, brown, cream, grey, vanilla and white ♦ Skyline bracket colors are silver, black and white ♦ Skyline bracket cover colors are black, brown, cream, grey, vanilla and white ♦
Skyline fascia bracket colors are black, brown, grey, vanilla and white



Skyline Hardware



Universal R-Series Bracket

Shown for a Wall Mount Application



Universal Skyline Bracket

Shown for a Ceiling Mount Application

Clutch	Bracket	Ceiling Mount Installation		Wall Mount Installation	
		Projection	Height	Projection	Height
R-8	RB360	1 7/8	2 7/8	2 3/8	2 3/8
R-8	RB360	1 7/8	3 3/8	2 7/8	2 3/8
R-16	RB560	2 5/8	3 1/8	2 15/16	3 1/4
R-16	RB560	2 11/16	4	3 7/16	3 1/4
R-24	RB580	3 9/16	4 5/8	3 7/8	4 5/16
SL-10	SLB660	2 1/4	3	2 5/8	2 3/8
SL-15	SLB660	2 1/4	3 1/8	2 3/4	2 5/8
SL-20	SLB660	2 3/4	3 1/4	3	3 1/8
SL-10	SLB680	2 3/16	3 1/2	3 1/8	2 3/8
SL-15	SLB680	2 1/4	3 5/8	3 1/4	2 5/8
SL-20	SLB680	2 11/16	3 3/4	3 1/2	3 1/8
R-Series/Skyline	3" Fascia	3	3	3	3
R-Series/Skyline	4" Fascia	4	4	4	4
R-Series/Skyline	5" Fascia	5	5	5	5

*Please note: Measurements for Ceiling Mount Installation take into account the width of the clutch as part of the overall projection but does not take into account the roll diameter which may be greater. The height is the distance from the foot of the bracket to end of the mounting bracket.

*Please note: Measurements for Wall Mount Installation take into account the distance from the foot of the bracket to the end of the clutch for the overall projection but does not take into account the roll diameter which may be greater. The height is determined by the overall height of the clutch. (All other dimensions are overall net dimensions)

Roller Shade Control Options

Pristine Roller Shades can be operated by either standard clutch, spring assist, spring roller or motorized options.

Standard Clutch Roller Shade

This roller shade is operated manually with a self-lubricating clutch mechanism. With a continuous loop control chain, shades can be rolled up, exposing a room to sunlight, or down to filter or block out the sunlight from entering the room.

Outdoor Clutch: Featuring Stainless Steel interior components and warranted for 10 years(See Price Grid 11 Pg 44)

Galaxy Clutch: An option other than a Spring Assist is a Galaxy Clutch. These are gear reduction clutches that will reduce the pull forces required to operate larger shades.

Caution:

Most clutches operate on a 1:1 gear ratio: meaning you pull chain 2 feet the shade moves 2 feet. By nature a Galaxy clutch, in order to reduce the pull force, will have up to 2 feet of chain pull to 1 foot of shade movement. As a result a chain stop cannot be used.

Two Models of Galaxy Clutches are available:

MSRP

G-200, for 1 ½" & 2" tube
G-400, for 1 ½", 2", 2 ½" & 3" tube

Price Grid 11 pg 44

Price Grid 11 pg 44

Spring Assist

When shades get larger even with stronger clutches the pull forces required get greater. Pristine offers 2 different spring assist systems to help: pin end spring assist & clutch spring assist.

When a shade is lowered, gravity is used to coil a spring attached to the pin-end side of the shade. When the shade is raised the coiled spring assists the operator by reducing the pull force required up to 40%. The pin end spring assists are available with 1 ½ "tubes.

The clutch side spring assists come in 2 sizes and will also add to the minimum width of the shades. These additions to the minimum width of the shades are usually not an issue as they are used on larger shades anyway.



Rollese Skyline Clutches



R Series Clutches

Galaxy Clutches



Outdoor R Series Clutch



Skyline Outdoor Clutch



Pin End Spring Assist



Galaxy Geared Spring Assist

Spring Assists (continued)

Spring Assist	Tube Diameter	Pull Reduction	Max Drop	Minimum Shade Width	MSRP
R-Series Pin End Spring Assist	1-1/2"	to 40%	116"	24"	Price Grid 11 pg 44
Skyline Pin End Spring Assist	1-1/2"	to 40%	116"	24"	Price Grid 11 pg 44
R-Series & Skyline Spring Assist 36"	1-1/2" & 2"	to 6 lbs.	TBD	58"	Price Grid 11 pg 44
R-Series & Skyline Spring Assist 45"	1-1/2" & 2"	to 6 lbs.	TBD	58"	Price Grid 11 pg 44

Chain Options

Nickel Plated Steel (standard)
White, Off-White, Clear or Black Plastic

Surcharge Applies. Price Grid 11 pg 44

- Dungeon
- Gun Metal
- Aluminum
- Yellow Brass
- Mystic Red
- Medieval Brass
- Stainless Steel
- Antique Bown

CHAIN FINISHES



CHAIN CONNECTORS



OPEN BALLS



RollEase

CORDLESS SPRING ROLLERS



Child And Pet Safe Solutions And A Neater Appearance With No Messy Cords

EasySpring Plus: Superior Performance, Wide Selection, Child and Pet Safe

See Price Grid 11 Pg 44 for Pricing

Both EasySpring and EasySpring Plus cordless spring rollers eliminate concerns about safety and aesthetics often associated with a dangling cord and comply with WCMA/ANSI standards making roller shades safe for both children and pets.

The durable construction of the EasySpring Plus ensures years and years of reliable performance. Our unique cordless lift system is manufactured with just a few parts making it easy to assemble and quick to install. The EasySpring Plus's tight and secure fit into shade headers prevents shades from popping out of brackets.




EasySpring Plus offers a variety of systems—including options on tube and spring sizes, single and dual shade applications, and adjustable wheel brackets—making it the perfect choice for any shade application in homes, offices, planes, yachts, and other recreational vehicles.

- Child and pet safe
- Sleek window shade appearance
- Easy-to-assemble in your fabrication area and quick to install
- Available for shades up to 78" wide
- Single and Dual shade options
- 5 systems to choose from
- 2 bracket choices
 - With side adjuster for minimal light gap
 - With adjuster wheel for easy after installation adjustments
- 1½" (38mm) diameters
- 3 spring sizes for each tube size - for very small to very large windows*
- Speed reducer built into spring
- Use with Cassette 100 or Cassette 120 for a clean, polished look

Note 1: EasySpring Plus Max Roll Diameter is 2 3/8" Note 2: No fascia available but soft valance is available

**If you require different spring sizes, please contact your Porter Preston Customer Support Representative to discuss special orders.

EasySpring Plus Rollersshade Chart

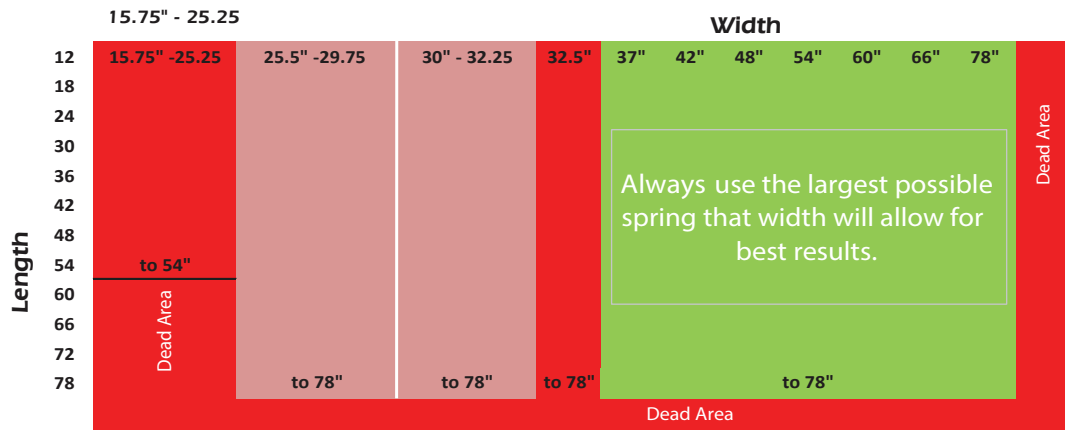

No Spring Available	
1.7 X 550mm (1.5")	RE0084400
1.5 X 450mm (1.5")	RE0080500
1.2 X 300mm (1.5")	RE0081400

Spring Size/Bracket Configuration	Spring Selection	Stopper (Idler)	Minimum Roller Shade Width (inches)
38mm (1.5") with Adj. wheel bkacket	1.2mmX300mm RE0080400	Regular 1.5" RE0081400	25 7/8
38mm (1.5") with Adj. wheel bkacket	1.5mmX450mm RE0080500	Regular 1.5" RE0081400	32 1/2
38mm (1.5") with Adj. wheel bkacket	1.7mmX550mm RE0084400	Regular 1.5" RE0081400	36 5/8
38mm (1.5") with Non Adj. wheel bkacket	1.2mmX300mm RE0080400	Regular 1.5" RE0081400	24 7/8
38mm (1.5") with Non Adj. wheel bkacket	1.5mmX450mm RE0080500	Regular 1.5" RE0081400	31 1/2
38mm (1.5") with Non Adj. wheel bkacket	1.7mmX550mm RE0084400	Regular 1.5" RE0081400	35 5/8

Spring Roller Shade

This roller shade is operated by a heavy-duty spring mechanism. All shades between 15" and 61" wide will be made with a 1" diameter metal tube. All shades between 61 1/8" and 97" will be made with a 1 3/8" diameter metal tube. Brackets are universal. By pulling on a handle or draw cord attached to the hembar, shades can be rolled up, exposing a room to sunlight, or down to filter or block out the sunlight from entering the room.

Minimum Width:	15"
Maximum Width:	97"
Minimum Height:	18"
Maximum Height:	108"

How to adjust the spring tension on a roller shade

The tension on the spring of your roller shade is already preset. If you wish or need to make any further adjustment, follow below noted procedures:

A: To Increase lifting power:

- 1) With the shade in the window, pull the shade part way down
- 2) Remove it from the mounting brackets and roll it half-way or so up
- 3) Replace it in the brackets of the windows and try it for tension and length that it will go down without being over-taught (unable to roll down anymore). Do not force it if it does not want to move downward as it is now over-wound - instead now try decreasing the tension as follows:

B: To Decrease lifting power:

- 1) With the shade in the window, roll the shade all the way up
- 2) Remove it from the mounting brackets and roll it half-way down or so
- 3) Replace it in the brackets of the windows and try it for proper lift & drop tension and travel distances top to bottom.

Note: If the shade will not travel all the way to the top, then the spring tension needs to be increased - follow procedure A.

If the shade will not travel all the way to the window sill or beyond, then the spring tension needs to be decreased - follow procedure B.

Hem Bar Options


- a. **Heatsealed Hembar:** This is Pristine's standard hembar. A weighted aluminum weight bar is inserted into a 1 1/2" heatsealed pocket. **The ends of the pocket are available sealed upon request for no additional charge.** Heatsealed hembars are included in all contract quotes.
- b. **External Hembar:** The External Hembar is an exposed aluminum hembar (see Price Grid 11, Page 45)



Heatsealed Hembar



External Hembar

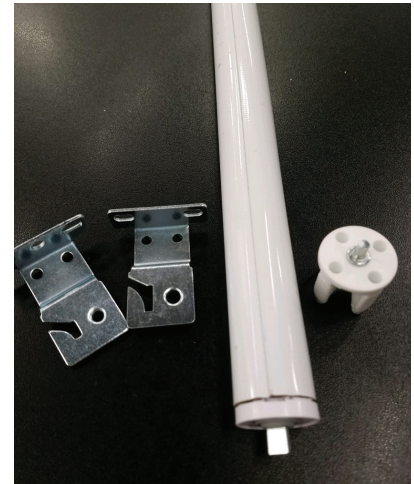


Skyline Bottom Up Roller Shades

Bottom up shades let the light in from the top of the window while shading the bottom section for privacy. This shade utilizes Skyline hardware combined with an innovative cord adjusting system to ensure a self-leveling hem bar. A geared clutch makes the system operation effortless.

See Price Grid 11, Pg 44 for MSRP

Skyline Chain Control

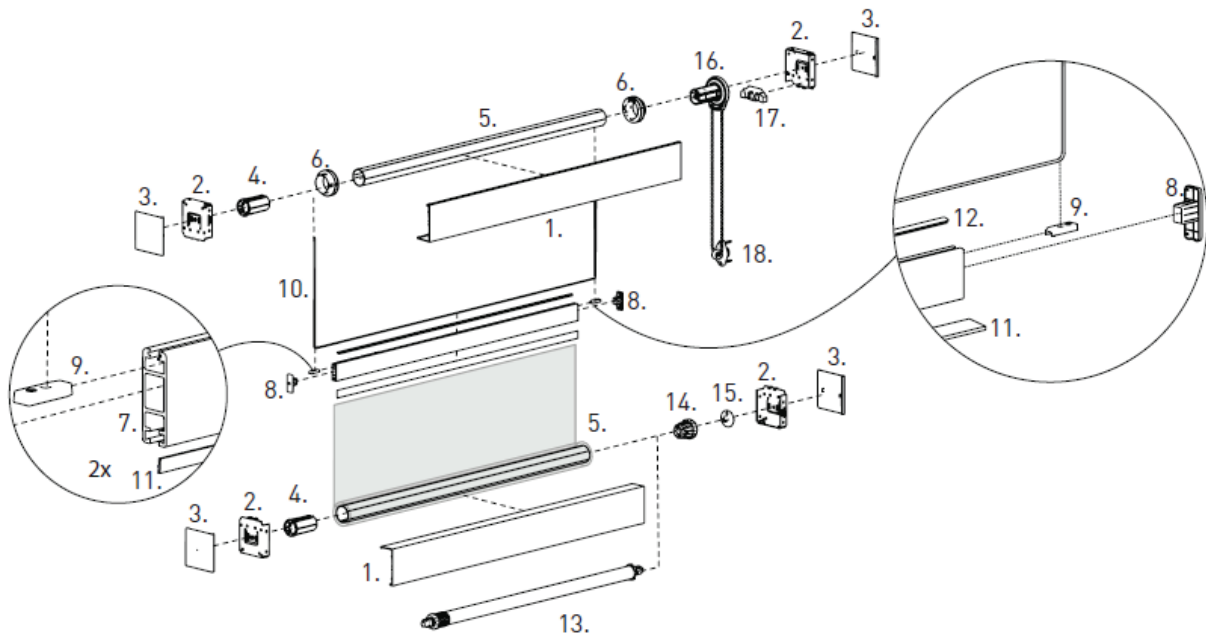

SYSTEM INDEX:


- | | |
|-----------------------------|--|
| 1. Skyline Fascia | 10. Cord |
| 2. Skyline Bracket | 11. Flat Spline |
| 3. Skyline Bracket Cover | 12. Bottom Up Rail Seal |
| 4. HD Pin End | 13. Booster Universal - 1.5" - No Stop |
| 5. 1.5" Tube | 14. Chainfree Control - 1.5" |
| 6. 1.5" Spool | 15. ESU Skyline Adapter |
| 7. Bottom Up Rail | 16. Skyline Clutch |
| 8. Bottom Up Rail Caps | 17. Skyline Chain Diverter |
| 9. Bottom Up Cord Guide Kit | 18. Chainhold Tension Device |

Roller Shade Valance Enclosure Options

Soft Valance

The soft valance is made out of the same fabric as the roller shade. The fabric valance has both a top and bottom pocket. The top pocket has a piece of wood inserted and the bottom pocket contains the same metal slat in the pocket as the roller shade. Screw through the top pocket and wood to mount the soft valance. The standard length is 6". It can be made any length up to 9" without a surcharge.

Roll: Available for regular roll and reverse roll shades
Color: Valance fabric matches shade fabric
Mount: Inside only (it does not have returns)
Maximum Width: 216"
See Price Grid 11
Page 45




Soft Valance

Inserted Fabric Valance

The Inserted Fabric Valance is a traditional dust cover vertical blind valance that uses 3 1/2" strips of roller shade fabric inserted into the groover channel of the valance. This valance features a continuous corner return that prevents the valance returns from separating from the valance. OB option requires separate brackets, nuts and bolts to attach valance to brackets.

Roll: Available for regular roll and reverse roll shades
Color: Valance fabric matches shade fabric
Mount: Inside or Outside
Maximum Width: 192"

See Price Grid 11
Page 45




Inserted Fabric Valance

3" Uncovered Skyline Fascia Valance

The Fascia system is a decorative cover compatible with Rollease Acmeda™ roller shade hardware systems. The system is multi-functional in both mounting and finished appearance.

Roll: Available for Regular Roll Only
Color: White, Vanilla, Bronze, Black & Anodized
Mount: Inside or Outside
Maximum Width: 144"
See Price Grid 11 Page 44

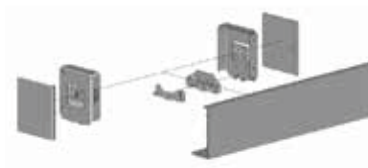


Skyline 3" Fascia

Roller Shade Valance Enclosure Options

3" & 4" Uncovered Square Aluminum Fascia Valance

The 3" & 4" Square Aluminum Fascia Valance is a "L" shaped aluminum extrusion that covers the front and bottom of the roller. The valance option locks to its brackets with snap-in fittings. The roller is concealed behind this valance and the bottom of the shade drops from the back of the valance when lowered.

Roll:	Available for regular roll only
Color:	White, Vanilla, Bronze, Black & Anodized
Mount:	Inside or Outside
Maximum Width:	144"
See Price Grid 11	
Page 44	

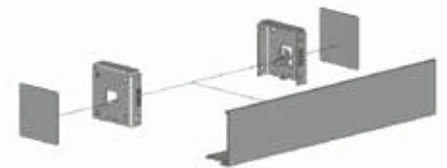

3" R Series Square Fascia




4" R Series Fascia

3", 4" & 5" Fabric Wrapped Square Fascia Valance

The 3" & 4" Fabric Wrapped Square Fascia Valance are the Square Aluminum Fascia Valances listed above, but include fabric matching the roller shade wrapped around the aluminum extrusion. This innovative upgrade option provides a warm look for any room. As described above with the Square Fascia Valance, this option covers the front and bottom of the roller and locks to its brackets with snap-in fittings. The roller is concealed behind this valance and the bottom of the shade drops from the back of the valance when lowered.


Roll:	Available for regular roll only Valance
Color:	fabric matches shade fabric
Mount:	inside or Outside
Maximum Width:	144"

See Price Grid 11
Page 44

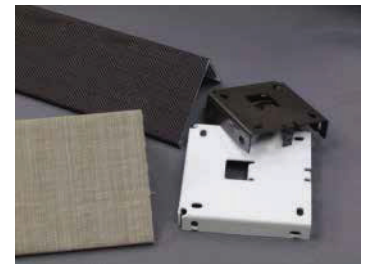

3" & 4" Fabric Wrapped Fascia

Universal 5" Fascia System

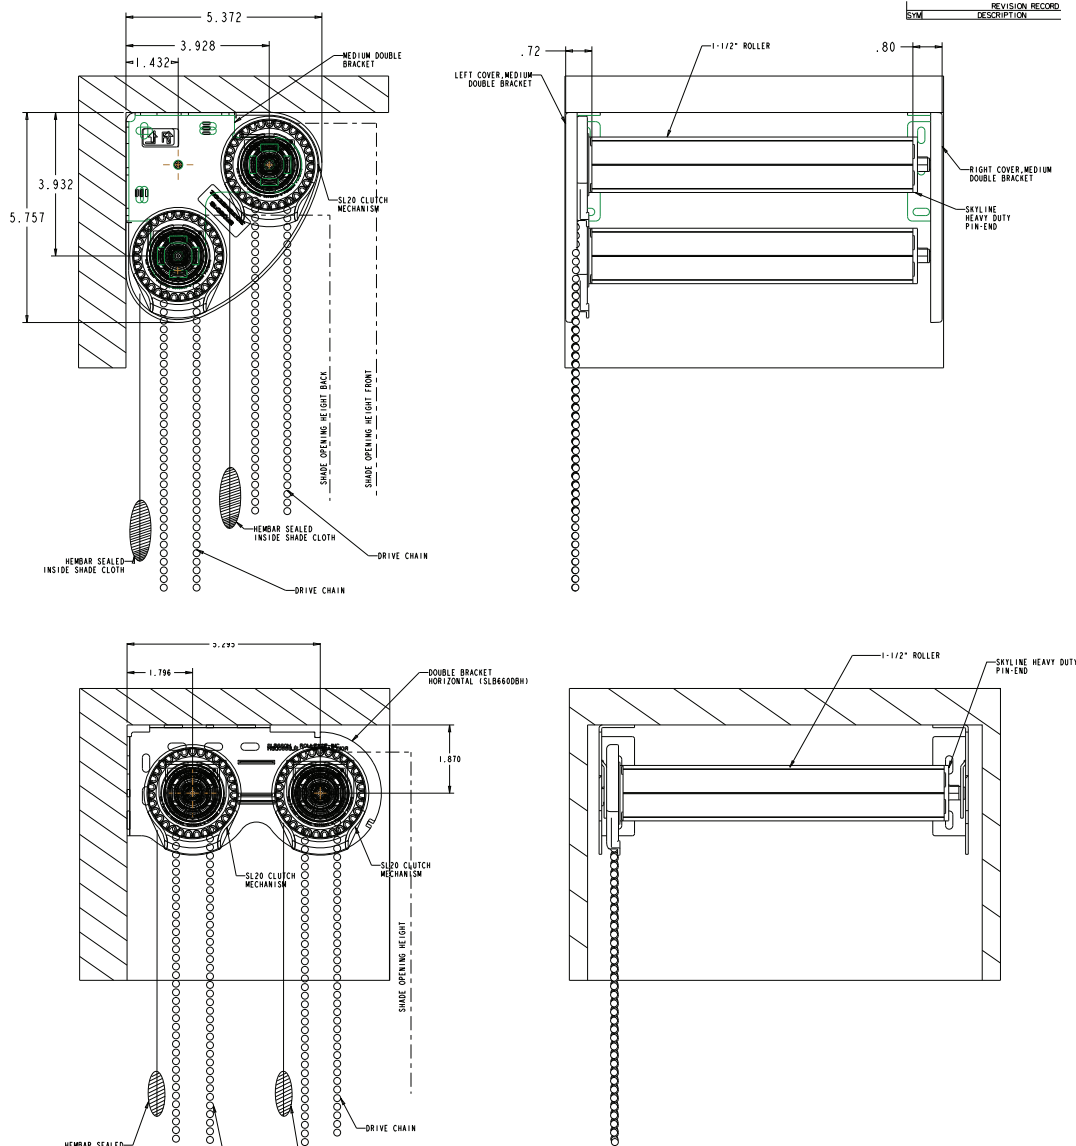


The modularity of the Universal 5" Fascia System offers a variety of different motorized or manual configurations. It also –


- Can be configured for a single large shade (4 3/4" diameter fabric roll) or dual shades (2 3/4" fabric roll),
- Eliminates notching of fascia using chain diverters and guides,
- Minimizes fascia light gap across the header as the top of the fascia is even with the top of the brackets,
- Accepts standard and reverse roll shades easily with reversible mounting fascia,
- Blocks light entering from behind the shades with optional mount of second length of fascia.

The Universal 5" Fascia System is available in white, anodized and bronze finishes and compliments the 3" and 4" Fascia and the Cassette 120. See Price Grid 11 Page 44

7" Square Fascia System

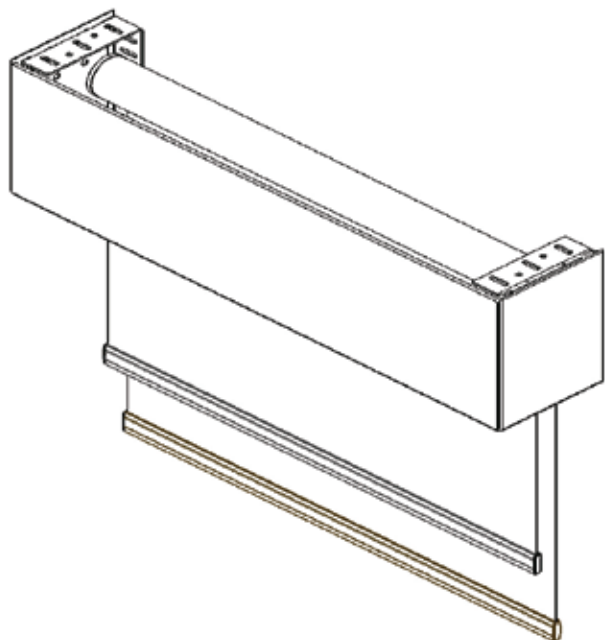


7" Square Fascia System with Somfy LT50 Motor

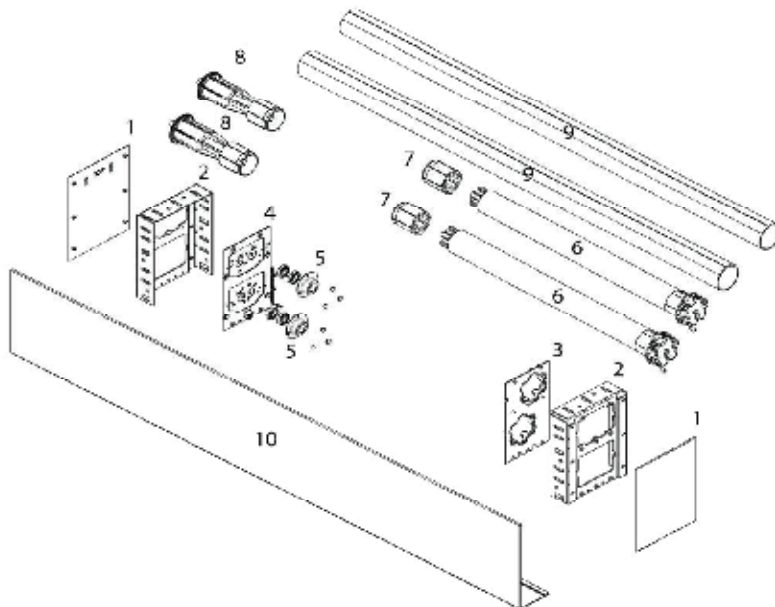

ZMC 7" Motorized Roller Shade

- SPECIFICALLY DESIGNED FOR ALL INDUSTRIAL AND COMMERCIAL APPLICATIONS THE 7" FASCIA SYSTEM PROVIDES A CLEAN AND MODERN APPEARANCE TO ANY LOCATION
- COMPATIBLE WITH SOMFY LT50 MOTOR ONLY AVAILABLE WITH INTERMEDIATE BRACKETS ALSO
- THE 7" DUO SHADE BRACKETS ALLOWS BOTH FILTERING AND ROOM DARKENING
- COMBINED WITH SIDE CHANNEL TO COMPLETELY ELIMINATE LIGHT PENETRATION WHEN CLOSED
- AVAILABLE IN WHITE, BRONZE & ANODIZED
- LENGTHS ARE 16 FEET

See Price Grid 11 Page 44

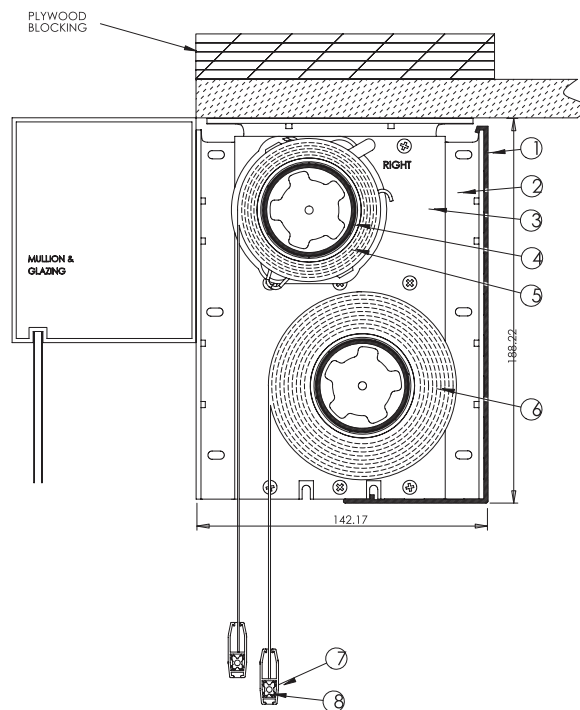

- NOTES:
1. 7" EXTRUDED ALUMINUM FASCIA
 2. 7" FASCIA BRACKET
 3. INSERT PLATE FOR MOTOR
 4. 2" EXTRUDED ALUMINUM MOTORIZED TUBE
 5. BLACKOUT FABRIC
 6. FABRIC: 3%, 5%, 10% OPENNESS
 7. EXTRUDED ALUMINUM SLIM BOTTOM BAR
 8. SLIM BOTTOM BAR END CAP




See Price Grid 11 Page 45

Cassette 100 & Cassette 120

Here at Porter Preston we offer one of the finest finishing options for Custom Roller Shades our Cassette 100 & 120 Systems. Here are some of the advantages for using these products:


- Three headrail sizes afford greater range of drop length possibilities and use of thicker fabrics
- Quick and easy installation
- Sleek look accommodates upscale commercial needs and affords greater residential appeal
- Sleek, curved design makes sunscreen fabrics more adaptable to residential use
- Intermediate bracket allows two shades in one headrail
- Available in five of the most popular colors: Anodized, White, Vanilla, Bronze & Black.

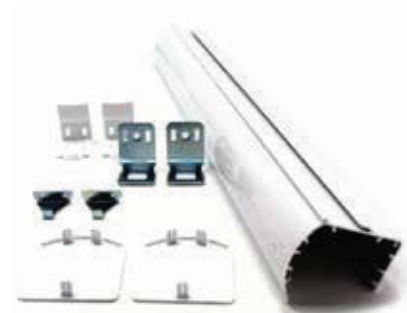


Cassette 100

Description	Systems Available	Compatible Clutches	Max Tube Diameter	Max Roll Diameter	Max Window Width	Colors Available	Mounting Brackets
Cassette 100	R-Series	R8, R16, RGAL RGALH 200	2 in (50.8mm)	2.5 in (63.5mm)	16 ft (4.88m)	Anodized, White, Vanilla, Bronze, Black	HDBKT2
Cassette 120	R-Series	R8, R16, RGAL RGALH 200	2 in (50.8mm)	2.870 in (72.90mm)	16 ft (4.88m)	Anodized, White, Vanilla, Bronze, Black	V2BKTXX



Cassette 100

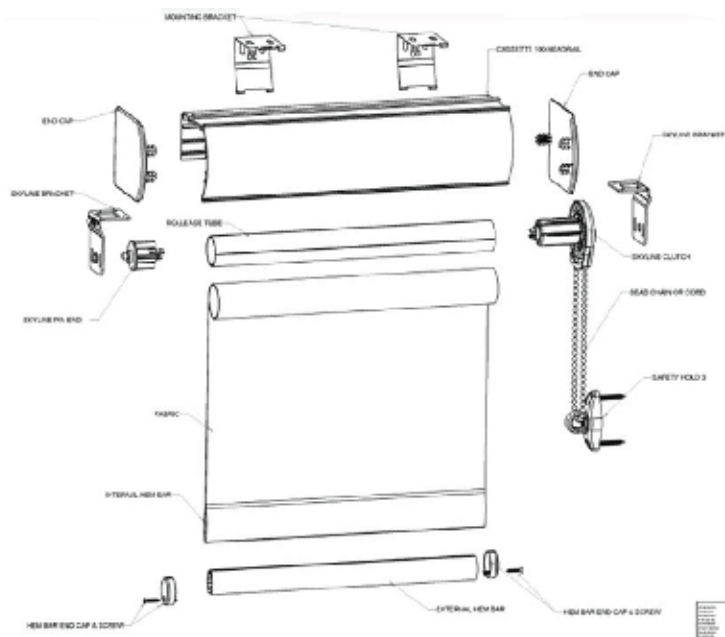



Cassette 120

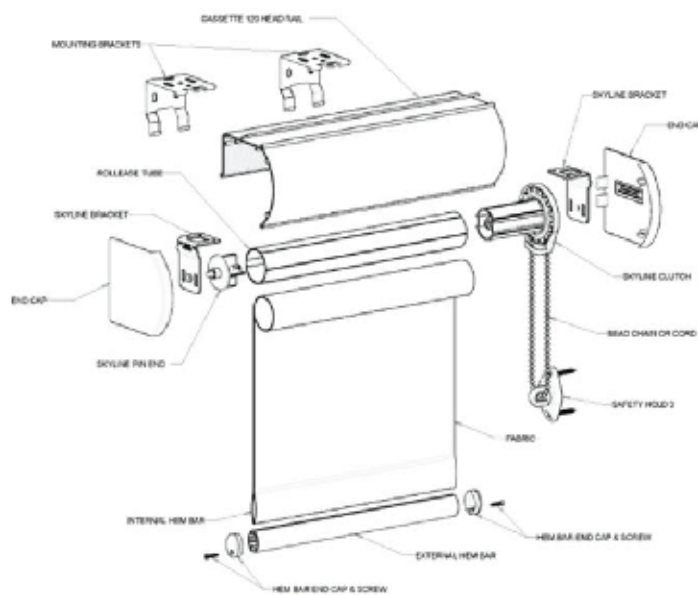

Headrail Cassette 100

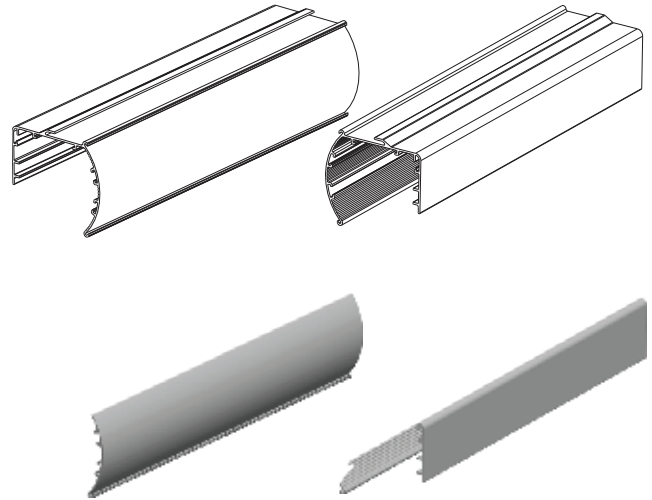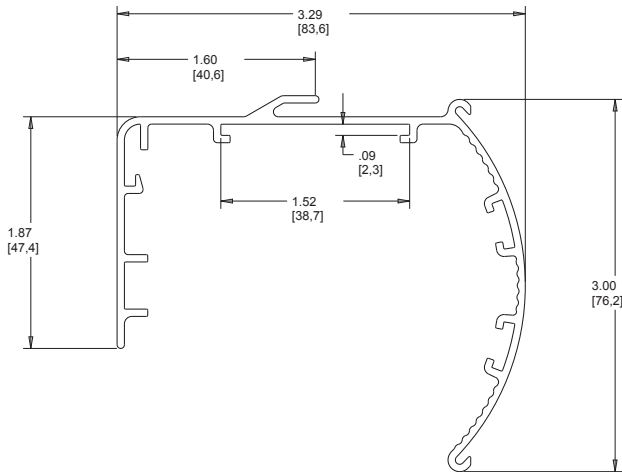

Headrail Cassette 120

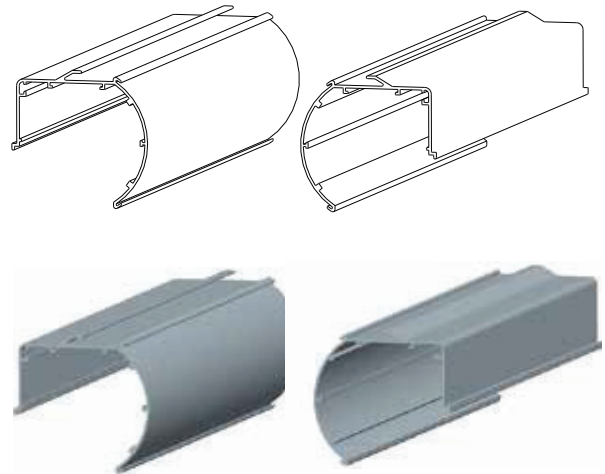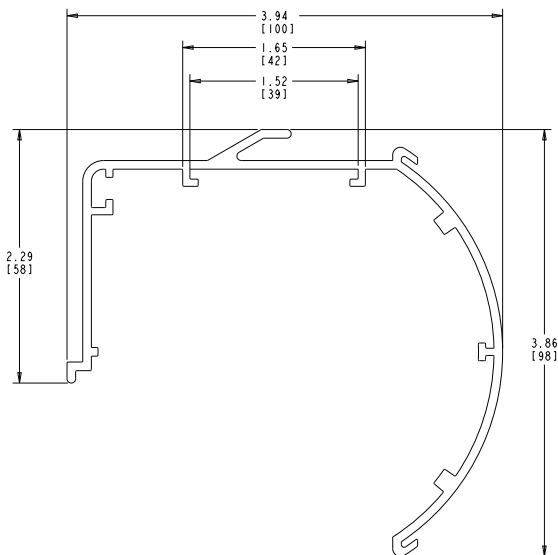

Lower Access Fascia / Flap & Hanger

The lower access fascia/flap & hanger is an aluminum extrusion that is installed at the bottom of a dry soffit to conceal the bottom of the roller shade. One should drill the mount strip wall hanger in the front of the dry wall soffit (pocket). **For Pricing See Price Grid 11 Page 45**

3" Lower Access Fascia / Flap and Hanger


Flap and Hanger provides a simple solution for concealing either a manual or motorized roller shade from viewers beneath the system. Flap and Hanger is a two-piece unit consisting of a "Hanger" which is mounted to the inside face of a gypsum pocket or soffit and a removable "Flap" which attaches to the hanger to provide a 3" return to conceal the shade mechanism.

Specifications

Material: 0.063" Extruded Aluminum

Color: White, Bronze and Anodized

Length: Available in custom lengths up to 150"

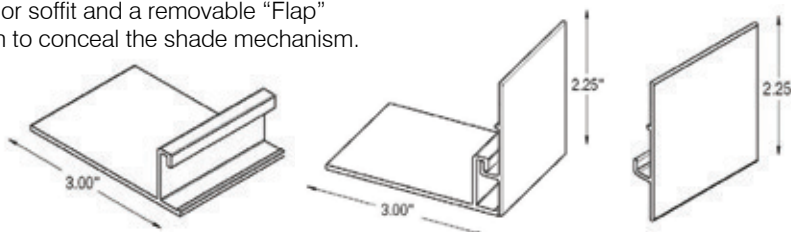

Roll: Available for regular roll and reverse roll shades


Color: White

Mount: Inside only


Minimum Width: 18"

Maximum Width: 240"

See Price Grid 11 Page 45



5" Lower Access Fascia / Flap and Hanger

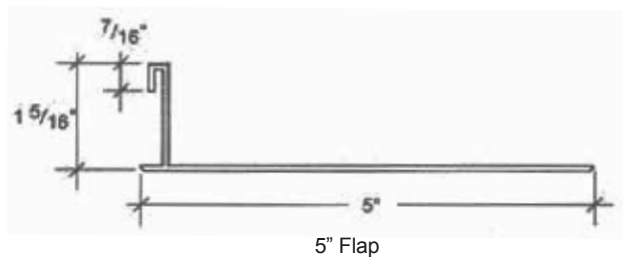

Roll: Available for regular roll & reverse roll shades

Color: White & Anodized

Mount: Inside or Outside

Minimum Width: 12"

Maximum Width: 192"

See Price Grid 11 Page 45

3", 4", 5", 6" Shade Box with Bottom Closure Plate



CONTRACT


Contract Series

QUICK REFERENCE SHEET

Widest variety of clutch options featuring award-winning and patented technology advancements that provide the smoothest and easiest pull forces in the industry.

- Aluminum Pockets in 4 sizes
- Bottom Closures and Black-out Side and Bottom Channels
- Multiple Tube and Bracket sizes
- Manual and Motorized options
- Quality design for fast, cost-effective and trouble-free installation

See Price Grid 11 Page 45

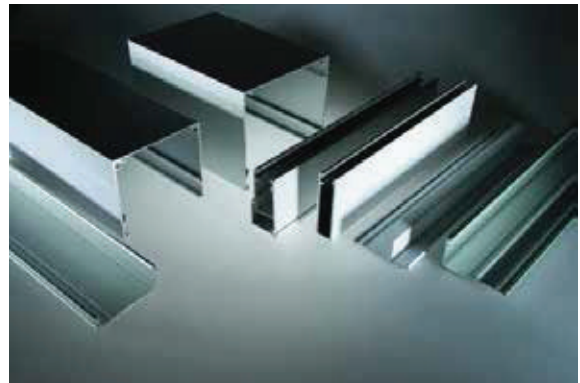

Item Description	Compatible Skyline Clutches	Compatible R-Series Clutches	Max Tube Diameter	Side Channels Available	Max Roll Diameter	Max Roll Diameter w/Bottom Closure	Max Window Width	Colors Available
3 Inch Pocket	N/A	R8, R16	2 in (50.8mm)	No	2.80 in (71.12mm)	2.4 in (60.96mm)	16 ft (4.88m)	Anodized, White
4 Inch Pocket	SL15, SL20, RGALH, SL30, RGAL400H	R16, R24	2 1/2 in (63.5mm)	Yes	3.75 in (95.25mm) 3.70 in (93.98mm)	3.4 in (86.36mm)	16 ft (4.88m)	Anodized, White
5 Inch Pocket	SL15, SL20, RGALH, SL30, RGAL400H	R16, R24, RGAL, RGAL400	3 1/4 in (82.6mm)	Yes	4.75 in (120.65mm)	4.75 in (120.65mm)	16 ft (4.88m)	Anodized, White
6 Inch Pocket	SL20, RGALH, SL30, RGAL400H	R16, R24, RGAL, RGAL400	3 1/4 in (82.6mm)	Yes	5.70 in (144.78mm)	5.5 in (139.7mm)	16 ft (4.88m)	Anodized, White

*For motor selections, see www.rollease.com/systems/roller-shades/motorized-solutions and click on Contract/Pocket Systems

Side Rails, Sill Channel & "Zip" Tracks

Side Rails & Sill Channels are aluminum extrusions used to eliminate light gaps at the left, right & bottom edges of the shade. Zip tracks are a great way to get the benefits of a side rail without any of the potential issues – can be used over open window – even outside.

Side Rails are used (primarily) for light control on the side and bottom of the shades. Side Rails are available in one width of 2 1/2" and have caps to finish top and bottom edges. Available in the following colors: White, Bronze, Black, Anodized and Vanilla.


See Price Grid 11 Page 45



Side Rail

Sill Channel is a more cost effective option used on the sill to control light bleed from the bottom of the shade.

See Price Grid 11 Page 45

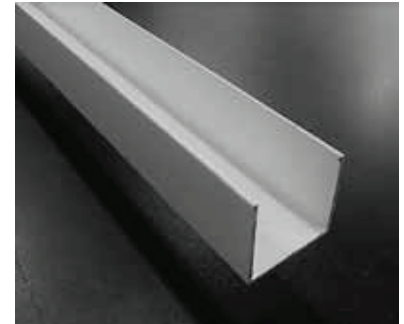

Sill Channel

ZIP Tracks are a fantastic way of getting all the benefits of a side rail and none of the draw backs. The vertical edge of the fabric has a "zipper" heat sealed to it that is retained by a special side rail extrusion so that the fabric will not only remain in the side rail but also be held snugly in place. Available in white, off-white, gray, bronze & black. Custom colors are also available.

Please Call for a Quote



Zip Tracks

Lithium-Ion Rechargeable Battery RTS Motors by SOMFY:

Somfy Li-ion Wirefree Motor Types-Batteries are embedded within the tube!

See Price Grid 12 Page 46-47 for Pricing

			
Motor	Roll Up 28 Lithium-Ion/RTS	Sonesse 30 Lithium-Ion/RTS	Sonesse 30 ULTRA Li-Ion/RTS
Part #	1240291	1003128	1003310
Voltage	12V DC	12V DC	12V DC
Sound Level	~44dBa	~44dBa	~40dBa
Max. Lifting Weight / Tube Dia.	9.68 lb / 1.25" 8.07 lb / 1.5"	17.6 lb / 1.5" 13.2 lb / 2"	17.6 lb / 1.5" 13.2 lb / 2"
Speed	10-28 Adjustable RPM (Factory setting is 28RPM)	10-28 Adjustable RPM (Factory setting is 28RPM)	10-28 Adjustable RPM (Factory setting is 28RPM)
Minimum System Width	25 3/8" Width	26 1/4" Width	28" Width
Recommended Max Shade Size	84" W x 84" H	120" W x 120" H	120" W x 120" H
AC Charger-Recharger: Roll up 28 Lithium-Ion & Sonesse 30 Lithium-Ion ONLY Part #: 9020672 			AC Charger-Recharger: Sonesse 30 ULTRA Lithium-Ion ONLY Part #: 9025166 



RTS Transmitters for Lithium-Ion Motors by Somfy:

(these transmitters work with all Somfy RTS Motors)

See Price Grid 12 Page 46-47 for Pricing

Control	NEW Situo 1 1 Channel Remote	NEW Situo 5 5 Channel Remote	Telis 1 1 channel Remote	Telis 4 5 channel remote	Telis 16 16 channel remote	Decoflex Wallswitch 1-5 Channel
Part #	1800128	1800139	1810632 (Pure)	1810633 (Pure)	1811081 (Pure)	See MSRP
Image						

Control	Smooove RTS Wall Switch	Decoflex Tabletop Accessory	MyLink Smartphone and Tablet /Voice Interface. myLink also allows for integration with third-party control systems such as Control 4, Savant & Crestron
Part #	1811533 (Pure)	1811185 (White)*also available in black	1811403
Image			





Automation

Pristine roller shades can be operated by battery or hard wired solutions. Control options are many from wireless wall switches and remotes to home automation interfaces.

Porter Preston offers many different solutions for the automation of window treatments. The simplest and most popular solution is Somfy RTS (Radio Technology Somfy) and we have featured these motors and controls here.

We are happy to quote motorization solutions such as Somfy ILT, Lutron QED & QS and Electronic Solutions. We will design the system that is right for your project. Ask about Porter Preston's Project Management and Installation services. We can provide a "turn-key" solution for your automation project.

Battery Powered Motorized Roller Shades

Somfy R28 RTS-1240292

Porter Preston offers Somfy R28 RTS battery powered motors. They are radio (RTS) controlled and fit 1 ½" roller tube. Their maximum lifting capacity is 10 lbs. In general they can lift a 96" x 96" shade. Expected battery life is 1 – 2 years depending on frequency of use. Lithium batteries are supplied and recommended when replacements are due.

Advantages:

- No need for wiring
- In wall and handheld wireless controls
- Same controls work with other RTS hard wired shades
- Shades can be operated individually, groups and sub-groups
- Small size

Disadvantages:

- Size / weight limitations
- Motor noise – rather loud
- Battery powered – eventually the shades will cease to function and the batteries will have to be replaced
- Motor speeds often will not be the same

Minimum Width: w/o fascia 16" with fascia 17"

Maximum Width: 96"

Somfy R28 RTS battery motor


Includes:

Battery wand

Battery wand mounting clips

8 lithium AA batteries

See Price Grid 12 Page 46-47

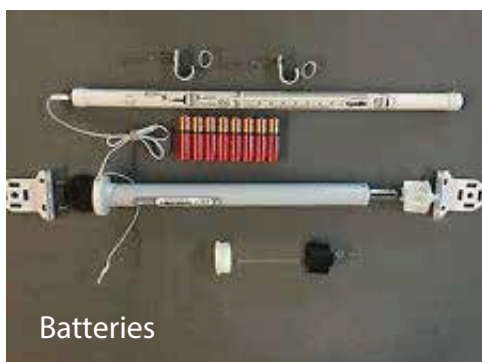

Somfy 12V DC Rechargeable Solar Battery Pack / Tube / Wand Kit Part # 9019235



Kit includes:

(1) Photovoltaic Solar Panel in Bezel with Glass mount adhesive strips,
(1) 10" Y-Harness, (1) Alcohol Wipe, (1) Instructions (10) #9018621 NiMH(Nickel Metal Hydride)
rechargeable batteries that fit in the reloadable battery tube.

- Used for powering Somfy LT30, CT32 and 2" Blind Tilt 12V Motors and Hunter Douglas 12 Volt PowerRise lift systems (see below).
- Low profile solar (photovoltaic) panel is compact, discreet and easy to conceal at just 1.57" tall x 11.85" Wide.
- Battery Tube / Wand 12" Y-Harness plugs directly into motor power port.
- Optional 24" or 48" Y-Harness available to extend reach of battery tube to motor.
- Replaces single (#9013741) and Dual (#9013742) throw away sealed battery wand.
- Battery Tube / Wand Dimensions: 20.625"L x 0.792D
- Warranty: 5-Years on Solar Panel, Wire Harness and Battery Holder. No warranty on NiMh Battery but has a life expectancy of 3-5 years.
- Somfy Cat. #9019235 includes (10)-NiNH batteries **MSRP:** See Price Grid 12 Page 46-47 for Pricing

The NEW Somfy Rechargeable Solar Battery Pack is a group of components that work in unison to provide a long life, renewable energy source for Somfy 12 Volt DC WireFree Motors. Patented energy saving technology uses sunlight to power WireFree Motorized window coverings by recharging the NiMH battery. Photovoltaics produce solar energy by converting solar radiation (sunlight) into direct electricity (DC) providing a Green alternative to regular batteries. The WireFree Solar Pack's PV panel is mounted on the inside of the window opening and converts the sun's light into electrical energy to power the window blind motor. The Solar Battery Pack is cost effective by reducing battery replacement and preserves the environment and provides a maintenance free solution that does not require an electrician. The Somfy Rechargeable Battery Pack is the ideal solution for hard to reach battery tube locations such as second story windows where battery replacement can be challenging.

Wired Motorized Roller Shades

See Price Grid 12 Pages 46-47

- **Somfy Sonesse ST-30 RTS (1001524)** 24 volt motor is a 2 nm (newton meter– a power rating) low voltage motor. It is best used on smaller shades as it can fit in a tube as small as 1.5". The motor is quiet – giving off only a small hum as it operates. As these motors operate off of 24 volts they do require a power supply to operate.

Minimum Width: 20" **Maximum Width:** 96"

Options: single motor power supply
5 motor power / distribution panel
10 motor power / distribution panel
panel dimensions: 12 1/4" x 12 1/4" x 5 1/2" high

- **Somfy Sonesse 40 RTS 404 S2 (1001636)** is a 4nm motor that runs on standard household line voltage. No power supply is necessary. An 11 1/2' cord is standard with the motor. Additional cord and plug is available at an additional cost.

Minimum Width: 23 1/2"

The Sonesse 40 series of motors are very quiet and deliver a lot of power in a 44mm or 2" tube size.

- **Somfy Sonesse 40 RTS 409 R2 (1001638)** is a 9nm motor that runs on standard household line voltage. No power supply is necessary. An 11 1/2' cord is standard with the motor. Additional cord and plug is available at an additional cost.

Minimum Width: 25"

The Sonesse 40 series of motors are very quiet and deliver a lot of power in a 44mm or 2" tube size.

For the Sonesse 40 RTS motors we can supply you with a grounded angle plug either loose or installed on the motor. If we install it on the motor for you we will cut the cord (11 1/2") to any length you specify. Note that this motor cable is NOT changeable so too long is always better than too short.

Angle Plug comes either loose or installed on motor

- **Somfy Sonesse 506 S2 RTS (1001809)** is a 6nm motor that runs on standard household line voltage. No power supply is necessary. See cord and plug options below.

Minimum Width: 31 1/2"

See Price Grid 12 Page 46-47



Radio Technology Somfy®



Sonesse ST-30 RTS



Sonesse ST-40 RTS



Sonesse 50 RTS w/o Plug



Sonesse 50 RTS 3' AC Cord with Plug

Wired Motorized Roller Shades

- **Altus 50 RTS** 525S2 (1043287) is for shades with great height or width, large banded shades and tensioned shades where more power is often needed. It is a 10nm motor that runs on standard household line voltage. No power supply is necessary. See cord and plug options below.

Minimum Width: 29"

See Price Grid 12 Page 46-47 for Pricing

These Sonesse 40, 50 and Altus 50 motors are also available in a standard **(4 wire) version**. Note that this motor will require a switch or external control.

RTS AC Cord Without Plug:

See Price Grid 12 Page 46-47 for Pricing

9203866	12' RTS Motor Cable WITHOUT Plug (LT-50)
9001537	18' RTS Motor Cable WITHOUT Plug (LT-50)
9001264	24' RTS Motor Cable WITHOUT Plug (LT-50)



110-volt AC Plug-in Motors simply plug directly into a standard electrical outlet

RTS AC Cord With Plug Installed on Motor:

See Price Grid 12 Page 46-47 for Pricing

9019952	3' RTS AC Cord With Plug Installed on Motor
9019953	6' RTS AC Cord With Plug Installed on Motor
9012145	12' RTS AC Cord With Plug Installed on Motor
9012151	18' RTS AC Cord With Plug Installed on Motor
9012146	24' RTS AC Cord With Plug Installed on Motor




24-volt DC Plug-in Motors require a power supply transformer that is wired to the motor cable and then plugs into an electrical outlet

Wired Motorized Roller Shades

Sonesse® ULTRA 50 AC -Part # 1002562

Ultra-quiet, ultra powerful, ultra flexible

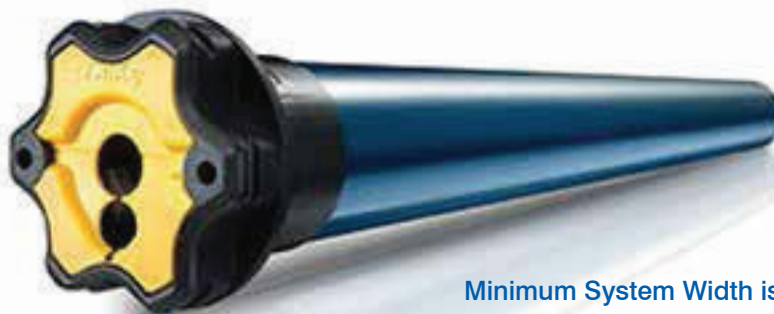

Minimum System Width is 39"

Description

Motorize a wide variety of window coverings to create the perfect environment and enjoy the peace and serenity provided by the Sonesse® ULTRA. It offers exceptional lifting capacity so you can enjoy powerful operation in a quiet and relaxing environment.

Benefits

Silent & Strong

Enjoy energy savings, privacy and glare reduction in a quiet atmosphere

- Perfect for areas where silence is critical such as nurseries, bedrooms and offices
- Our patented technology provides strong performance that allows for multi-banding
- of up to six shades

Comfort & Convenience

Continue your activities uninterrupted at home or work with the peaceful silent

- operation of motorized applications
- Compatible with multiple control technologies so you can operate motorized applications with ease

Energy Savings

Compatible with timers, sensors and the myLink™ app for automatic operation

Description

ULTRA Powerful

Its superior torque of up to 6Nm allows the motor to be installed for almost any application on the market. Additionally, the high torque allows for a single Sonesse ULTRA to multi-band up to six shades.

ULTRA Quiet

Sonesse ULTRA 50 AC is packed with innovations and patented technologies that provide 6Nm of power and an acoustic performance of less than 38dB- the most powerful and quietest motor on the market.

ULTRA Flexible

Available for a variety of control systems, for all types of spatial configurations in commercial and residential buildings, in both new and renovated projects.

See Price Grid 12 Pages 46-47



Radio Technology Somfy®

RTS Controls

Telis Handheld Remote Controls

Telis Remote controls come in 3 different channel configurations 1, 5, & 16.

They are available in 3 colors: Pure – White; Lounge – Black; Silver- Silver. There is also a weather resistant model – the Patio.

For MSRP See Price Grid 12 Pages 46-47

Telis 1 Pure	(1810632)	Telis 4 Silver	(1810641)
Telis 1 Patio	(1810643)	Telis 4 Lounge	(1810652)
Telis 1 Silver	(1810639)	Telis 16 Silver	(1811082)
Telis 1 Lounge	(1810650)	Situo 1 RTS	(1800128)
Telis 16 Pure	(1811081)	Situo 5 RTS Pure	(1800139)
Telis 1 Chronis Pure	(1805237)	Smooove 1 RTS Pure	(1811533)
Telis 4 Pure	(1810633)		
Telis 4 Patio	(1810645)		



Telis 1 Patio



Telis 4 Lounge



Telis 4 Pure



Telis 16 Pure

The Telis 6 Chronis RTS is a multi-channel (6) programmable timer that can also be used as a 6 channel hand held remote.



Situo RTS offers a sleek modern look, refined profile, ergonomic design with a discreet wall support

The Smooove RTS is a single channel, battery-operated wall switch for Radio Technology Somfy powered products. Its surface-mount design eliminates



the need to cut into drywall during installation. With seven decorative frame choices the Smooove is the perfect choice to match any decor.

Situo 1 RTS-Price Grid 12 Pages 46-47

Smooove 1 RTS Pure-Price Grid 12 Pages 46-47

For MSRP See Price Grid 12 Page 46-47

DecoFlex In Wall Wireless Remote Controls

Somfy's DecoFlex is a wireless RTS control with a decora cutout that mounts in the wall in a low voltage ring (included). It comes standard in either 1 or 5 channel configurations. 2, 3 & 4 channel face plates are available for an extra charge. Included with every DecoFlex are stickers for custom labeling every button. Printed buttons are available as well. DecoFlex is available in White, Ivory & Black.

See Price Grid 12 Pages 46-47

1810897	DecoFlex 1 White
1810898	DecoFlex 1 Ivory
1810830	DecoFlex 1 Black
1810813	DecoFlex 5 White
1810814	DecoFlex 5 Ivory
1810899	DecoFlex 5 Black



DecoFlex 1 White



DecoFlex 5 Ivory

2, 3 or 4 Channel DecoFlex Overlays Available

Custom Engraved Decoflex Command Buttons

Controls for Standard Motor

See Price Grid 12 Page 46-47

1800374	White Single Pole Double Throw (SPDT) Maintained Decora Switch
1800373	Ivory Single Pole Double Throw (SPDT) Maintained Decora Switch
1800375	White Double Pole Double Throw (DPDT) Maintained Decora Switch
1800376	Ivory Double Pole Double Throw (DPDT) Maintained Decora Switch
1810476	IGC 4n1 Motor Controller
1810627	Universal RTS Receiver for 110v Motors

Quick Disconnect Cable for Standard Motors loose or installed on motor

See Price Grid 12 Page 46-47

9012160	Anderson Power Plug Installed on Motor (male-white)12"
9012161	Anderson Power Plug Installed on J-Box side (female black 60"

Somfy Universal RTS Interface

See Price Grid 12 Page 46-47

Somfy's Universal RTS 16 Channel Interface can convert commands from IR, RS232, RS485 to RTS commands

1810872	Somfy Universal RTS Interface
---------	-------------------------------



Somfy Universal RTS Interface

DecoFlex RTS Table Top Accessory- See Price Grid 12 Page 46-47

1811185	DecoFlex Table Top Black
1811051	DecoFlex Table Top White



DecoFlex Table Top Black



RTS Repeater

RTS Repeater - extend the range of your RTS controls up to 60'

1810791	RTS Repeater	See Price Grid 12 Page 46-47
---------	--------------	------------------------------

RTS Sun Sensor

9013707	Sunis Indoor Wirefree RTS Sun Sensor	Price Grid 12 Page 46-47
---------	--------------------------------------	--------------------------



Sun Sensor

myLink™ RTS

Smartphone and Tablet Interface

See Price Grid 12 Pages 46-47



OVERVIEW:

The myLink™ RTS Smartphone and Tablet Interface is a WiFi to Radio Technology Somfy® (RTS) bridge that can control up to 16 channels of RTS motorized products using the Somfy myLink apps for iOS and Android devices. Through the app, users can send immediate RTS commands, create scenes (a group of motorized products working together) and schedules (timed events). Users may access their myLinks from anywhere with the app's remote access feature. Though the myLink is a single-zone controller, multiple myLinks can be joined within the same system for multi-zone control. The myLink can also be used as a WiFi to RTS interface for integration with third-party control systems and is compatible with the Somfy Synergy™ API and Amazon Alexa.



For information about the original myLink (Legacy version), see Legacy spec sheet. Legacy myLinks are identified with the status LED and setup button on the right side of the unit, and device IDs beginning with "AAAA" (EX: AAAA1234).



TECHNICAL SPECIFICATIONS:

- 120V AC; 50-60Hz
- Ultra Low Power Wi-Fi (802.11 a/b/g/n)
- 3.64" L x 2.35" W x 1.95" H
- Radio Frequency:
 - RTS 433.42 MHz
 - Wi-Fi: 2.4 & 5GHz
- iOS Version: 7 and higher
- Android Version: Jelly Bean and higher
- FCC ID: DWNMYLINK
- Operating Temp: 41°F to 113°F (5°C to 45°C)
- Rated Current (Amps): 10 to 50 milliamps
- Insulation Class: Class II
- For Indoor Use Only
- Enclosure:
 - PE
 - UL94V-0 flame rating
 - RoHS compliant
- Shipping Weight: 1lb


FEATURES SUMMARY:

- Control for up to 16 RTS channels per myLink™ from iOS and Android devices
- Join up to 10 myLinks together for multi-zone control
- Manually activate RTS products
- Automate window coverings with scenes and schedules
- Supports Up/Down/My/Stop commands and incremental control (tilt/brightness)
- Multiple users
- Remote access
- Integration with third-party systems over IP
- Compatible with Somfy Synergy
- Compatible with Amazon Alexa

WHAT'S IN THE BOX:

- myLink™
- Quick Start Guide


CONNECTIONS AND INDICATORS:

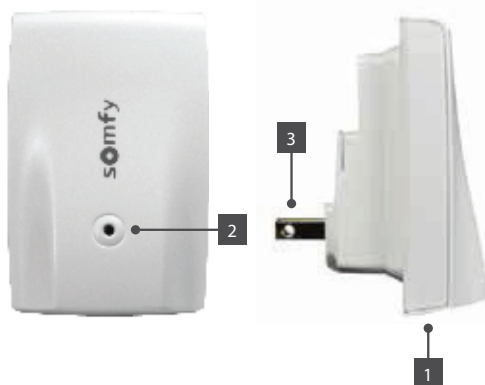

ELEMENT	FUNCTION
1 Setup Button	Engages setup mode
2 Status LED	Solid Red: Setup mode. The myLink is ready to accept WiFi network information or have its PIN changed. This is the mode the myLink should be in out of the box. Solid Green: myLink is successfully connected to a WiFi network Slow Blinking Green: myLink is trying to connect to a WiFi network/is disconnected from its known WiFi network Single Orange Blink: myLink is sending RTS commands Solid Orange: Firmware update mode Slow Blinking Red: myLink is scanning both 2.4GHz and 5GHz bands for nearby WiFi networks
3 AC Prongs	AC prongs

DIMENSIONS:

Item #: 1811403-See Price Grid 12 Pages 46-47

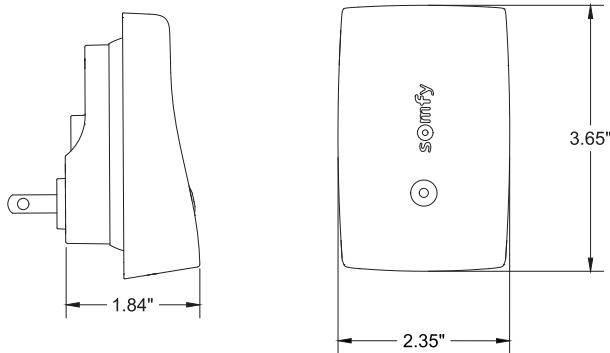

BEST WIRING PRACTICES

Before installing the myLink, make sure that the RTS system is fully operational with all motor limits set and a programmed RTS transmitter. Plan to install one myLink per zone. Actual specification and RF range will vary depending on number of RTS channels and environmental conditions (building materials, RF interference, etc.).

The diagram shown below is meant for illustrative purposes to show the connections from product to product. This device could be used in other configurations than shown below.



Automated Window Treatments Are Better Than Ever!

Tubular motors with built in Lithium-ion rechargeable batteries!

Porter Preston expands our Pristine Roller Shade and Workroom offerings to include the **Automate™ Radio Communication (ARC™)** motorization program by Rollease Acmeda:




- ✓ Built in rechargeable Lithium-ion batteries
- ✓ Easy to install-no electrician required
- ✓ Perfect upgrade from manual shades-no hardwiring
- ✓ Leveling control can achieve precise positioning of multiple shades
- ✓ Simple limit setting and adjustment
- ✓ Over 500 up/down full cycles Per charge (based on 13oz psy fabric for roller shade at recommended max shade size)

- ✓ Easy Programming in 5 Simple Steps with Remote or Smart Phone App
- ✓ Shades can be controlled via remote, smart phone app, internal sunlight sensor & switches
- ✓ Favorite Position
- ✓ 2 way RF communication. Shade positioning and battery health are relayed via smart phone app. A notification will prompt when motor requires charging
- ✓ Optional solar powered charger
- ✓ 3 operational speed settings available
- ✓ Features proprietary ARC™ protocol = less RF Interference & better battery life

Automate™ Radio Communication (ARC™) Motors by Rollease Acmeda:

Automate Li-ion Wirefree Motor Types

See Price Grid 14 Page 51

						
Motor	Li-ion 0.2	Li-ion 1.1	Li-ion Q2.0	Li-ion 3.0	Li-ion Q3.0	Li-ion Q10
Part #	MTDCBRF18-0.2	MTDCBRF25-1.1	MTDCBRFQ28-2	MTDCBRF35-3	MTDCBRFQ45-3	MTDCBRF45-10
Voltage	12	12	12	12	12	12
Sound Level	~48DB	~46DB	~44DB	~53DB	~40DB	~42DB
Max. Lifting Weight / Tube Dia.	3.1lb / 1.125"	13lb / 1.5"	17lb / 2"	26lb / 2"	21lb / 2.5"	55lb / 3.25"
Speed	80 rpm (adj to 60/40)	40 rpm (adj to 30/20)	28 rpm (adj to 24/20)	28 rpm (adj to 24/20)	28 rpm (adj to 24/20)	9 rpm (adj to 8/6)
Minimum System Width	21 5/8"	23 7/8"	21 1/2"	37 1/2"	37 7/8"	37 7/8"
Recommended Max Shade Size	48"x60"	84"x84"	120"x120"	120"x120"	144"x144"	168"x168"
AC Charger-Recharger for DC Battery Motors *priced separately from motor		 Electronic Limit Switch  Battery Powered  Favourite Position  Level Control  433MHz Bi-directional  Adjustable Speed  Solar Panel  AC Charger				

Automate™ Radio Communication (ARC™) Motors by Rollease Acmeda:

Automate Li-ion Wirefree Motor Types

See Price Grid 14 Page 51

Control	1 channel Remote	15 channel remote	5 channel wall switch (surface mount)	1 Channel wall switch (cut in)	2 Channel wall switch (cut in)	15 Channel wall switch (cut in)	*NEW* Automate Push 5 Remote
Part #	MTRF-REM-1C	MTRF-REM-15	MTRF-SW5-FLUSH	MTRF-WS-1C	MTRF-WS-2C	MTRF-WS-15	White: MT02-0101-067004 Black: MT02-0101-050004
Image							


Control	*NEW* Automate Pulse 2 Available 10/30/19	Sun Sensor	Solar Panel
Part #	MT02-0401-067001	MTRF-SUNSENS	MTSOLPAN-B
Image			

Qmotion®

The QMotion Difference [See Price Grid 13 Pages 49-50](#)

QMotion shading systems are developed for simplicity, superior function and aesthetic elegance. QMotion has focused on developing automated window coverings that move quietly, more efficiently, and have batteries that last years longer than others.

- Low voltage 1-way or hardwired with ZigBee HA1.2 2-way communications.
- Easy to program.
- With battery operated shades, simple installation - no wires.
- Whisper quiet motors.
- Industry leading 1/2" light gaps.
- Evenly distributed on both sides.
- Side channels & sill angles optionally available.
- Patented manual override system.
- Patented counterbalance system.
- Integrated Safety Stop.

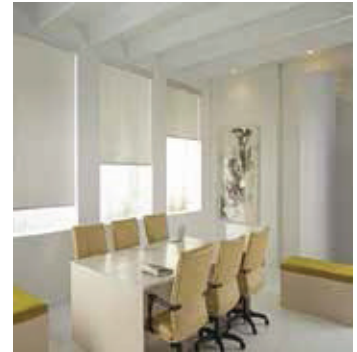

QMotion Qadvanced motorized roller shades are available in battery or wired configurations. Battery operated shades have 2 communication options to choose from:

- Gen 3 proprietary protocol, 1-way communication.
- Qadvanced with ZigBee HA1.2 (Home Automation v 1.2) specification for 2-way communications.



Qadvanced wired options now include:

- Low voltage using 22AWG/24V wires with Gen 3 proprietary protocol, 1-way communication.
- Qadvanced Intelligent System (QIS) hardwired, uses standard Cat5e or Cat6 cable for both power and communications. QIS shades may be used with our wired wall switches and/or wireless remote controls using the ZigBee HA1.2 specification.



Qadvanced Operated Shades [See Price Grid 13 Pages 49-50](#)

Qadvanced operated roller shades are now available in three different communication protocols. The enhanced proprietary protocol in Gen 3 shades, for those environments that may have a lot of other electronic devices competing for radio air space. The 2-way communication with the ZigBee HA1.2 battery operated shades. And the Qadvanced Intelligent System (QIS) is hardwired shading offering the option of ZigBee communication.

Qadvanced Battery Operated Roller Shades with Gen 3

- Uses the 3rd generation QMotion proprietary protocol, 1-way communication
- Great for stand-alone applications where there is potential interference from other electronic devices. This protocol may be more consistent and responsive in radio rich environments.
- Qadvanced Gen 3 roller shades use our QdR Remotes, either single channel or multi-channel. QdR remotes are designed to fit in standard style wall plates

- QMotion Qadvanced Battery operated Shades are available using the ZigBee HA1.2 (Home Automation v1.2) specification for 2-way communication.
- Adding 2-way communication allows for feedback of the shade position with automation apps. Qadvanced shades with ZigBee HA1.2 have features such as manual override, quiet motors, narrow light gaps, with the added benefit of the ZigBee network.
- May be integrated with smart home automation systems or used "stand alone" with the QdR Multi Channel Remote. Most smart home automation systems will require the Qube coordinator (gateway or bridge device) for integrating the shades to their system

Qadvanced Battery Operated Roller Shades with Zigbee HA1.2

Qadvanced Intelligent System Hardwired

- Uses standard off-the-shelf Cat5e or Cat6 cable for both power and communications. **NOTE: Do NOT use Power over Ethernet (PoE) or any Ethernet wiring or powering scheme**
- Require a Power and Communications Panel with 8 ports. The 8 ports connect via RJ-45 connectors for any combination of a total of 8 shades and controls.

Roller Shade Material Pristine Roller Shades are available in many colors, textures and privacy options from the top manufacturers in the world. In addition we will also use Customer's Own Material (COM) to meet the needs of our customers that require color and/or pattern coordination. Contact Customer Service for Pricing.

Pristine Roller Shade Material tend to fall into three categories: Solar Screens, decorative Transluents & Blackouts. Within these three categories the fabrics range from functional to decorative and everything in between.

Solar Screens

These are Mesh fabrics designed to control natural light.

Available in many "openness factors" i.e. 1%, 3%, 5%, 10%, etc. Openness Factor affects comfort, the degree of visibility and glare control.


Protects interiors and furnishings from the damaging rays of the sun.

Reduces glare for televisions and computer screens.

Preserves the view to the outside. *Note that this view is from the relative dark side to the relative bright side so at night a lit room will be visible from the outside.*

Provides a decorative aspect – especially with the latest in Solar Screen designs.

Caution!! Some Solar Screen fabrics installed on windows with existing insect screens can cause a "Moiré Effect" which could be objectionable to the end user. It is always best to test for this with a fabric sample BEFORE ordering the shades. If it is winter be sure to ask as sometimes the insect screens are removed for the winter.

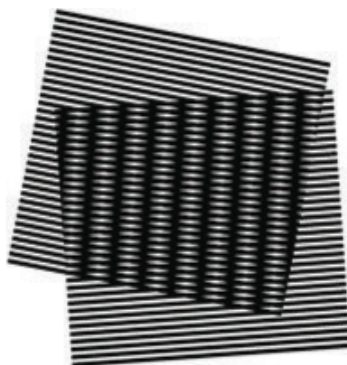

"Moiré Effect"

Transluents

These fabrics let in some light but none of the view affording a nice warm glow in the daytime and privacy anytime.

Pristine has Translucent fabrics that have a matching Blackout counterpart.


Blackouts

As the name implies these fabrics will not allow any direct light to pass through. There is no openness in the fabric, however some portions of the fabric composition are translucent enough that you may see a "glow" behind the shade, particularly if the window is facing east or west. No UV rays come through the fabric and there is complete privacy. The "glow" varies by product. See the chart on page 21 for specific comparisons.

Pristine has Blackout fabrics that have a matching Translucent counterpart.

Caution: While a Blackout shade does not allow any light to pass through the fabric, light can and will bleed around the sides, top & bottom of the shade. Pristine offers valances, side rails and sill rails to eliminate all light from the window.

The Glow Effect

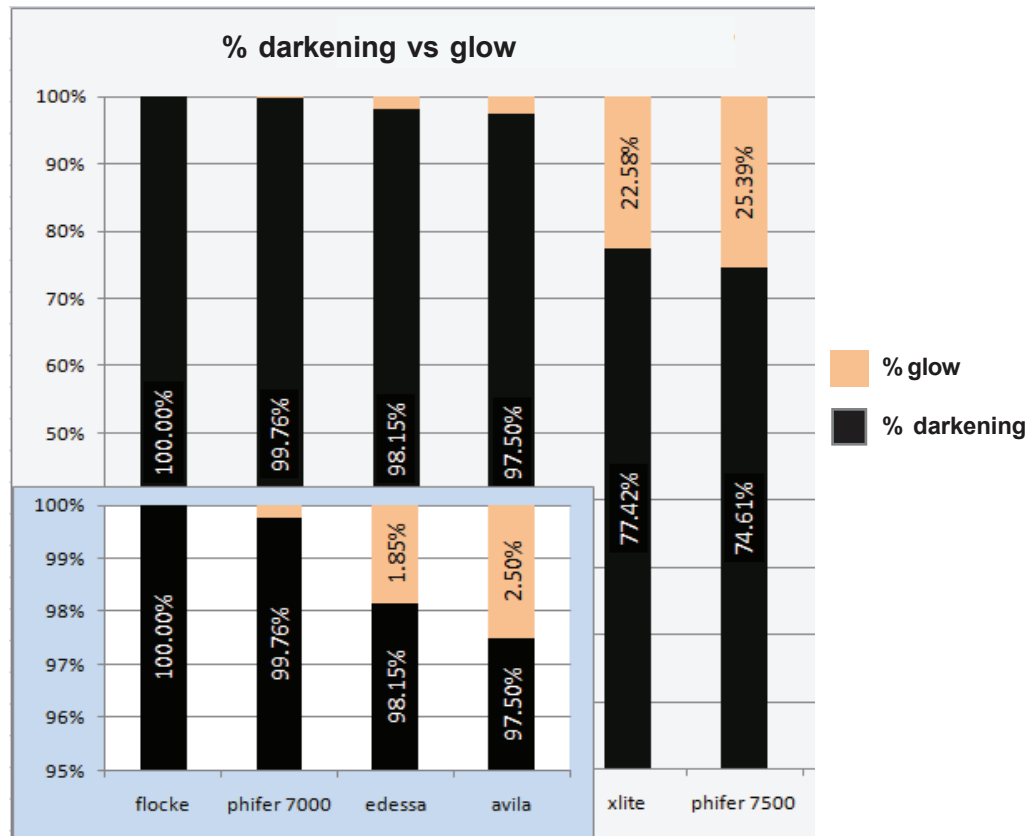

Shade Roll-Up Diameters

Fabric thickness will vary. The table below is based on a fabric with a thickness of .020 inches

Drop			Tube Outside Diameter					Inches
			1.25	1.50	2.00	2.50	3.25	
cm	Inches	Feet	32	38	50	63	83	mm
30	12	1	1.37	1.60	2.07	2.56	3.30	Shade Diameter Fully Raised
61	24	2	1.47	1.69	2.15	2.62	3.34	
91	36	3	1.57	1.78	2.22	2.68	3.39	
122	48	4	1.67	1.86	2.29	2.73	3.43	
152	60	5	1.76	1.94	2.35	2.79	3.48	
183	72	6	1.84	2.02	2.42	2.84	3.52	
213	84	7	1.92	2.10	2.48	2.90	3.56	
244	96	8	2.00	2.17	2.54	2.95	3.61	
274	108	9	2.08	2.24	2.60	3.00	3.65	
305	120	10	2.15	2.30	2.66	3.05	3.69	
335	132	11	2.22	2.37	2.71	3.10	3.73	
366	144	12	2.29	2.43	2.77	3.15	3.77	
396	156	13	2.35	2.49	2.82	3.20	3.81	
427	168	14	2.42	2.56	2.88	3.24	3.85	

Fascia System	Largest Allowable Shade Diameter
	Inches
Cassette 100	1.95
Cassette 120	2.25
R-Series Fascia, 3"	2.75
SL Fascia, 3'	2.75
Contract Pocket, 3"	2.75
R-Series Fascia, 4"	3.75
SL Fascia, 4"	3.75
Contract Pocket, 4"	3.75
Contract Pocket, 5"	4.75
Contract Pocket, 6"	5.75

Roller Shade Fabrication Chart for RollEase R- Series

		Width														
		36	42	48	54	60	66	72	84	98	108	120	132	144	156	168
length	36															
	48															
	60															
	72															
	84															
	96															
	108															
	120															
	132															
	144															
	156															
	168															
	180															
	192															

Clutch	Tube
R8	1 1/4"
R16	1 1/2"
R24	1 1/2"
R16	2"
R24	2"
Galaxy Clutch	
Spring Assist	
Motor	

Roller Shade Fabrication Chart for RollEase Skyline

		Width														
		36	42	48	54	60	66	72	84	98	108	120	132	144	156	168
Length	36															
	48															
	60															
	72															
	84															
	96															
	108															
	120															
	132															
	144															
	156															
	168															
	180															
	192															

Clutch	Tube
S10	1 1/4"
S15	1 1/4"
S15	1 1/2"
S20	1 1/2"
S15	2"
S20	2"
Galaxy Clutch	
Spring Assist	
Motor	



LIFETIME LIMITED WARRANTY FOR CUSTOM ROLLER SHADES

Porter Preston proudly extends a lifetime-limited warranty on the enclosed product to the original retail purchaser as long as the product remains in the original window.

WARRANTY COVERAGE

Entire product against manufacturing defects (i.e., a flaw in the product design, materials or workmanship that causes the product to no longer function).....**Lifetime**

All fabric (except laminated shades).....**5 years**

Somfy products.....**5 years**

NOT COVERED

Normal wear and tear

Any product that fails due to:

- abuse
- exposure to salt air
- improper installation
- accident
- extraordinary use
- improper operation
- alterations
- improper cleaning
- misapplication
- damage from pets/insects
- improper handling
- misuse

Any product that, with the

passage of time, has:

- loss of color intensity

Costs associated with:

- product removal
- transportation to and from the retailer
- brand label removal
- product remeasure
- incidental or consequential damages
- product reinstallation
- shipping

In the event there are multiple shades in the same room, only the defective shade will be replaced.

If damage occurred during shipping, call 1-866-753-1113 and report within 14 calendar days or else you may be denied credit for your damaged product.

Any unauthorized returns will not be accepted.

THIS SHALL BE YOUR SOLE REMEDY UNDER THIS LIMITED WARRANTY.

If this product is found to have a manufacturing defect in materials or workmanship, we will (at our discretion) do one of the following:

- repair the product
- replace the product
- refund the cost of the product
- Colors vary from lot to lot and may not exactly match sample swatch or previous purchases.
- Discontinued items or color selections will be replaced with the closest equivalent current product.

YOUR RIGHTS UNDER STATE LAW

This lifetime limited warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Some states do not allow limitations on how long a warranty lasts, so the above limitations may not apply to you. No agent, representative, dealer, or unauthorized employee has the authority to increase or alter the obligation of this warranty. This lifetime limited warranty supersedes any previous versions.

PRISTINE FABRIC SPECIFICATIONS

Fabric	Price Grid	Openness %	Max Fabric Width	Railroadable	Fabric Covered Valance	Weight oz/sq yd	Thickness	Fire Rated	Green Guard Gold	Fungal Resistance
9803 3%	4	3%	98"	Y	Y	11.60	0.025	Y	Y	Y
Alkenz 3000 Net 1%	3	1%	118"	Y	Y	15.28	0.026	Y	Y	Y
Alkenz 3000 Net 3%	3	3%	118"	Y	Y	13.12	0.022	Y	Y	Y
Alkenz 3000 Net 5%	2	5%	118"	Y	Y	12.39	0.022	Y	Y	Y
Alkenz 3000 Net 10%	2	10%	118"	Y	Y	11.36	0.020	Y	Y	Y
Alkenz 3000 Net Privacy	3	0%	118"	Y	Y	15.28	0.026	Y	Y	Y
Avila Daylight NON-FR 1%	3	1%	118"	Y	Y	6.20	0.012	N	Y	Y
Avila Twilight NON-FR	4	0%	118"	Y	Y	12.24	0.018	N	Y	Y
Century/Opaque BO	1	BO	72"	Y	Y	12.00	0.013	Y	Y	Y
Duplex BO	1	BO	72"	Y	Y	12.50	0.013	Y	Y	Y
E Screen 1%	6	1%	122"	Y	N	13.30	0.020	Y	Y	Y
E Screen 3%	4	3%	122"	Y	N	11.60	0.017	Y	Y	Y
E Screen 5%	4	5%	122"	Y	N	10.70	0.016	Y	Y	Y
E Screen 10%	3	10%	122"	Y	N	10.30	0.020	Y	Y	Y
E Screen Chroma 3%	9	3%	94.5"	Y	N	11.92	0.020	Y	Y	Y
E Screen Deco 1%	6	1%	122"	Y	N	12.30	0.022	Y	Y	Y
E Screen Deco 3%	5	3%	122"	Y	N	11.50	0.019	Y	Y	Y
E Screen KOOL BLACK 1%	10	1%	98"	Y	N	12.95	0.021	Y	Y	Y
E Screen KOOL BLACK 3%	9	3%	98"	Y	N	11.30	0.020	Y	Y	Y
E Screen KOOL BLACK 5%	8	5%	98"	Y	N	10.60	0.019	Y	Y	Y
Flocke BO	10	BO	94.5"	Y	Y	15.93	0.020	Y	N	Y
GreenScreen Evolve 3%	4	3%	118"	N	N	8.85	0.029	Y	Y	Y
GreenScreen NATURE 5%	9	5%	94.5"	Y	N	5.10	0.010	Y	Y	Y
Green Screen REVIVE 1%	6	1%	118"	N	N	5.87	0.019	Y	Y	Y
GreenScreen REVIVE 5%	5	5%	118"	Y	N	5.01	0.017	Y	Y	Y
Laminates	10									
Linen Glass RD	1	RD	72"	Y	Y	12.00	0.016	Y	Y	Y
M Screen 1%	5	1%	122"	Y	N	13.12	0.022	Y	Y	Y
M Screen 3%	4	3%	122"	Y	N	12.70	0.022	Y	Y	Y
M Screen 5%	4	5%	122"	Y	N	11.30	0.022	Y	Y	Y
M Screen Deco 3%	5	3%	98"	Y	N	12.21	0.023	Y	Y	Y
M Screen Deco 5%	5	5%	98"	Y	N	11.30	0.020	Y	Y	Y
Moire RD	1	RD	72"	Y	Y	12.00	0.014	Y	Y	Y
Natte 5%	7	5%	122"	Y	Y	14.13	0.022	Y	Y	Y
Natte 10%	6	10%	122"	Y	Y	13.48	0.021	Y	Y	Y
NoLite	2	RD	72"	Y	Y	14.00	0.014	Y	Y	Y
S Screen 1%	6	1%	122"	N	N	19.10	0.041	Y	Y	Y
S Screen 4%	6	4%	122"	N	N	18.90	0.037	Y	Y	Y
S Screen Naturals 5%	4	5%	98"	N	N	15.00	0.042	Y	Y	Y
Sheerweave 1000 25%	2	25%	96"	N	Y	8.80	0.020	Y	Y	Y
Sheerweave 2000 5%	3	5%	126"	N	Y	14.40	0.021	Y	Y	Y
Sheerweave 2100 10%	3	10%	98"	N	Y	12.90	0.021	Y	Y	Y
Sheerweave 2360 10%	3	10%	126"	Y	Y	10.40	0.019	Y	Y	Y
Sheerweave 2390 5%	3	5%	126"	Y	Y	11.80	0.017	Y	Y	Y
Sheerweave 2390 Performance Plus 5%	9	5%	96"	Y	N	11.80	0.018	Y	Y	Y
Sheerweave 2410 3%	4	3%	126"	Y	Y	14.10	0.020	Y	Y	Y
Sheerweave 2410 Performance Plus 3%	9	3%	96"	Y	N	14.10	0.019	Y	Y	Y
Sheerweave 2500 1%	5	1%	126"	Y	Y	16.20	0.024	Y	Y	Y

Fabric	FABRIC SPECIFICATIONS									
	Price Grid	Openness %	Max Fabric Width	Railroadable	Fabric Covered	Weight oz/sa vd	Thickness	Fire Rated	Green Guard Gold	Fungal Resistance
Sheerweave 2500 Performance Plus 1%	9	1%	96"	Y	N	16.39	0.024	Y	Y	Y
Sheerweave 2701 1%	5	1%	126"	Y	Y	14.60	0.027	Y	Y	Y
Sheerweave 2703 3%	4	3%	126"	Y	Y	14.00	0.028	Y	Y	Y
Sheerweave 2705 5%	3	5%	126"	Y	Y	11.80	0.025	Y	Y	Y
Sheerweave 2710 10%	3	10%	98"	Y	Y	10.40	0.023	Y	Y	Y
Sheerweave 3000 14%	2	14%	96"	Y	Y	13.46	0.028	Y	Y	Y
Sheerweave 4000 Eco 5%	3	5%	126"	Y	Y	18.00	0.032	Y	Y	Y
Sheerweave 4100 Eco 10%	3	10%	98"	Y	Y	16.70	0.032	Y	Y	Y
Sheerweave 4400 Eco 3%	4	3%	126"	Y	Y	19.90	0.034	Y	Y	Y
Sheerweave 4500 5%	4	5%	126"	Y	Y	14.40	0.024	Y	Y	Y
Sheerweave 4550 5%	4	5%	98"	Y	Y	13.00	0.025	Y	Y	Y
Sheerweave 4600 3%	5	3%	126"	Y	Y	17.40	0.030	Y	Y	Y
Sheerweave 4650 3%	5	3%	98"	Y	Y	13.30	0.026	Y	Y	Y
Sheerweave 4800 1%	5	1%	126"	Y	Y	18.50	0.036	Y	Y	Y
Sheerweave 4901 1%	5	1%	98"	Y	Y	15.85	0.028	Y	Y	Y
Sheerweave 4903 3%	4	3%	98"	Y	Y	14.90	0.027	Y	Y	Y
Sheerweave 5000 1,3,5,7,10%	5	1, 3, 5, 7, 10	98"	N	Y	12.3-16.1	.032-.052	Y	Y	Y
Sheerweave 7000 BO	8	BO	118"	Y	Y	12.40	0.029	Y	Y	Y
Sheerweave 7100 BO	7	BO	96"	Y	Y	21.60	0.025	Y	Y	Y
Sheerweave 7200R BO	4	BO	118"	N	Y	11.06	0.024	Y	Y	Y
Sheerweave 7250R LF	3	LF	118"	N	Y	6.19	0.018	Y	Y	Y
Sheerweave 7400 BO	8	BO	118"	N	Y	12.53	0.029	Y	Y	Y
Sheerweave 7450 LF	3	LF	118"	N	Y	6.54	0.026	Y	Y	Y
Sheerweave 7500 BO	4	BO	118"	Y	Y	12.14	0.016	Y	Y	Y
Sheerweave 7600 BO	7	BO	118"	N	Y	11.80	0.021	Y	Y	Y
Sheerweave 7650 LF	3	LF	118"	N	Y	6.20	0.017	Y	Y	Y
Sheerweave 7700R BO	3	BO	118"	N	Y	13.60	0.028	Y	Y	Y
Sheerweave 7750R LF	2	LF	118"	N	Y	8.80	0.023	Y	Y	Y
Sheerweave 7800 BO	7	BO	118"	Y	Y	12.90	0.026	Y	Y	Y
Sheerweave 7850 LF	3	LF	118"	Y	Y	7.40	0.027	Y	Y	Y
Sheerweave 8000 3% PVC Free	7	3%	118"	Y	Y	7.35	0.019	Y	Y	Y
Sheerweave Basic 3%	3	3%	98"	Y	Y	16.40	0.025	Y	Y	Y
Sheerweave Basic 5%	3	5%	98"	Y	Y	14.10	0.022	Y	Y	Y
Sheerweave Infinity2 1%	8	1%	98"	N	Y	13.90	0.032	Y	Y	Y
Sheerweave Infinity2 3%	8	3%	98"	N	Y	13.69	0.031	Y	Y	Y
Sheerweave Infinity2 5%	8	5%	98"	N	Y	12.82	0.030	Y	Y	Y
T Screen Deco 1%	6	1%	122"	Y	Y	13.76	0.028	Y	Y	Y
T Screen Deco 3%	5	3%	122"	Y	Y	12.98	0.028	Y	Y	Y
T Screen Deco 5%	5	5%	122"	N	Y	11.89	0.028	Y	Y	Y
T Screen KOOL BLACK 1%	8	1%	122"	Y	Y	13.54	0.024	Y	Y	Y
T Screen KOOL BLACK 3%	7	3%	122"	Y	Y	13.27	0.029	Y	Y	Y
T Screen KOOL BLACK 5%	7	5%	122"	Y	Y	12.48	0.027	Y	Y	Y
TFR/Cotton EI	2	LF	72"	N	Y	6.40	0.009	Y	Y	Y
Translucent Plus	1	0%	72"	Y	Y	9.60	0.013	Y	Y	Y
Verona Daylight 1%	3	1%	118"	N	Y	5.90	0.021	Y	Y	Y
Verona Twilight 0%	6	0%	118"	N	Y	11.65	0.024	Y	Y	Y
Vizela	7	LF	94.5"	Y	Y	8.70	0.013	Y	Y	Y
Wide Shade BO	2	BO	120"	Y	Y	17.90	0.017	Y	Y	Y

PRICE GRID 1 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
Century/Opaque	36"	95	108	114	127	133	145	151	170	223	254	304	354	404	453	502
Duplex	48"	107	121	128	142	148	163	171	192	248	282	336	389	443	497	550
Linen Glass	60"	118	134	142	158	166	182	190	214	273	311	368	425	483	541	598
Moire	72"	129	145	156	173	183	199	210	270	298	338	401	461	523	584	644
Translucent Plus	84"	140	159	170	189	199	218	263	294	323	367	432	497	562	628	692
	96"	151	171	184	202	248	269	282	315	349	407	474	541	607	673	740
	108"	162	183	197	218	266	287	301	337	374	436	506	577	647	718	788
	120"	173	196	212	267	282	305	321	360	399	463	538	612	687	761	835
	132"	184	209	257	281	299	323	340	394	437	492	570	649	726	805	883
	144"	195	220	270	297	315	341	360	417	462	519	602	684	766	848	931
	156"	206	265	284	312	332	359	379	440	488	548	634	720	806	891	977
	168"	217	277	299	328	349	378	399	462	513	576	666	755	846	935	1025
	180"	228	290	312	342	365	395	419	484	538	603	696	792	885	979	1073
	192"	240	302	326	358	383	414	438	507	562	632	728	827	925	1022	1120

● Width (Inches)

● Height (Inches)

PRICE GRID 2 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
Alkenz 3000 Net 5%	36"	112	128	135	148	157	171	177	199	263	300	358	418	476	534	594
Alkenz 3000 Net 10%	48"	126	142	151	167	175	193	200	226	293	333	396	460	523	586	650
NoLite	60"	139	158	167	186	195	214	224	252	322	366	435	502	570	638	706
Sheerweave 1000 25%	72"	153	172	184	204	215	235	247	319	352	399	472	545	617	689	762
Sheerweave 3000 14%	84"	165	187	199	222	235	257	310	346	382	434	509	586	664	741	818
Sheerweave 7750R LF	96"	177	201	216	240	294	318	333	371	411	480	559	638	717	796	875
TFR/Cotton EI	108"	191	216	232	258	313	338	355	398	441	514	598	681	764	847	931
Wide Shade BO	120"	204	230	249	314	333	360	378	424	471	547	635	722	810	899	987
	132"	217	246	303	332	352	382	402	466	515	580	672	765	858	950	1043
	144"	230	260	319	351	371	404	424	493	546	613	710	807	904	1001	1099
	156"	244	312	335	368	391	424	447	519	576	646	747	850	952	1053	1154
	168"	255	326	352	386	411	445	471	546	605	679	787	891	999	1105	1211
	180"	269	341	368	405	431	467	494	572	635	712	824	934	1045	1156	1267
	192"	282	356	385	422	451	489	517	599	665	745	861	976	1093	1207	1323

● Width (Inches)

● Height (Inches)

PRICE GRID 3 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
Alkenz 3000 Net 1%	36"	135	153	163	180	191	209	218	246	310	361	424	489	551	615	678
Alkenz 3000 Net 3%	48"	154	173	187	206	219	240	251	284	354	410	480	551	622	692	763
Alkenz 3000 Net Privacy	60"	171	194	210	231	247	270	285	324	396	460	536	615	692	770	847
Avila Daylight NON-FR	72"	190	214	232	258	276	301	319	396	441	509	594	678	763	847	932
E Screen 10%	84"	208	235	255	283	304	332	387	436	485	558	650	741	832	924	1017
Sheerweave Basic 3%	96"	225	255	279	310	366	396	420	475	529	619	716	812	908	1004	1100
Sheerweave Basic 5%	108"	244	277	302	335	393	428	454	514	573	669	772	876	979	1081	1185
Sheerweave 2000 5%	120"	261	298	325	393	422	459	488	552	617	718	828	938	1048	1159	1269
Sheerweave 2100 10%	132"	280	318	381	420	451	490	522	604	673	767	884	1002	1119	1236	1354
Sheerweave 2360 10%	144"	298	338	405	445	479	522	554	642	718	817	940	1065	1189	1314	1437
Sheerweave 2390 5%	156"	316	391	428	472	508	552	588	682	762	865	996	1129	1260	1391	1522
Sheerweave 2705 5%	168"	334	412	451	497	536	583	622	720	806	915	1053	1191	1329	1468	1607
Sheerweave 2710 10%	180"	352	432	474	524	564	614	656	760	850	964	1109	1255	1400	1545	1691
Sheerweave 4000 Eco 5%	192"	370	453	497	549	594	644	689	798	894	1013	1165	1319	1470	1623	1776

Sheerweave 4100 Eco 10%

Sheerweave 7250R LF

Sheerweave 7450 LF

Sheerweave 7650 LF

Sheerweave 7700R BO

Sheerweave 7850 LF

Verona Daylight 1%

● Width (Inches)

● Height (Inches)

PRICE GRID 4 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
9803 3%	36"	158	178	190	211	223	243	254	286	363	422	498	573	649	723	798
Avila Twilight NON-FR	48"	178	201	217	241	254	279	294	332	413	478	562	644	728	811	895
E Screen 3%	60"	199	226	244	270	287	314	332	376	463	535	626	718	809	900	991
E Screen 5%	72"	220	250	270	300	321	350	370	463	514	591	691	791	889	989	1088
GreenScreen Evolve 3%	84"	242	273	298	330	353	386	449	507	564	649	755	862	969	1077	1184
M Screen 3%	96"	263	298	324	359	425	462	489	551	614	720	831	943	1056	1168	1280
M Screen 5%	108"	283	321	351	389	459	498	527	597	665	776	897	1017	1136	1257	1377
S Screen Naturals 5%	120"	304	346	377	459	492	533	566	640	716	832	960	1088	1217	1345	1473
Sheerweave 2410 3%	132"	325	369	443	489	524	569	604	700	780	888	1024	1161	1297	1433	1570
Sheerweave 2703 3%	144"	346	392	470	518	557	604	642	745	831	944	1090	1234	1378	1522	1666
Sheerweave 4400 Eco 3%	156"	366	456	497	548	588	640	682	790	882	1001	1153	1305	1459	1610	1763
Sheerweave 4500 5%	168"	387	479	524	578	622	676	720	833	932	1057	1217	1378	1538	1699	1859
Sheerweave 4550 5%	180"	408	502	550	607	655	711	759	879	983	1113	1283	1450	1619	1787	1956
Sheerweave 4903 3%	192"	429	527	577	637	687	747	797	922	1032	1169	1346	1522	1699	1875	2052

Sheerweave 7200R BO
Sheerweave 7500 BO

● Width (Inches)

● Height (Inches)

PRICE GRID 5 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
E Screen Deco 3%	36"	178	200	217	240	255	278	295	333	405	480	557	634	710	788	864
GreenScreen Revive 5%	48"	205	231	251	278	299	325	346	391	471	554	642	729	818	906	993
M Screen 1%	60"	231	263	285	316	340	371	395	451	538	630	728	827	926	1024	1123
M Screen Deco 3%	72"	258	293	321	355	384	418	446	542	605	705	815	924	1032	1143	1252
M Screen Deco 5%	84"	284	323	355	393	426	465	528	600	671	779	900	1021	1141	1261	1381
Sheerweave 2500 1%	96"	311	354	390	432	499	543	579	658	739	865	994	1125	1253	1382	1512
Sheerweave 2701 1%	108"	337	384	424	471	542	588	630	718	805	940	1080	1220	1360	1500	1641
Sheerweave 4600 3%	120"	364	414	459	541	584	636	681	776	872	1015	1166	1318	1468	1620	1770
Sheerweave 4650 3%	132"	390	445	523	579	628	683	731	847	950	1091	1252	1414	1575	1737	1900
Sheerweave 4800 1%	144"	417	476	558	617	669	728	781	905	1017	1165	1339	1511	1683	1856	2029
Sheerweave 4901 1%	156"	443	535	591	656	712	776	832	964	1083	1240	1424	1607	1791	1975	2158
Sheerweave 5000 1,3,5,7,10%	168"	470	567	626	694	754	823	883	1022	1151	1315	1509	1704	1898	2094	2287
T Screen Deco 3%	180"	496	597	661	734	797	869	934	1081	1217	1390	1595	1800	2007	2211	2418
T Screen Deco 5%	192"	523	628	695	772	840	916	985	1140	1285	1464	1681	1897	2114	2331	2546

● Width (Inches)

● Height (Inches)

PRICE GRID 6 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
E Screen 1%	36"	205	231	248	275	293	319	336	379	466	551	641	734	825	915	1007
E Screen Deco 1%	48"	233	265	286	318	339	369	391	444	541	633	736	838	941	1045	1148
Green Screen REVIVE 1%	60"	264	299	325	359	386	421	447	508	613	714	829	944	1059	1174	1289
Natte 10%	72"	294	332	363	403	434	472	502	615	686	797	924	1050	1178	1304	1431
S Screen 1%	84"	322	366	402	444	479	524	600	679	760	879	1018	1155	1294	1433	1572
S Screen 4%	96"	352	401	439	488	567	616	655	744	832	975	1124	1271	1417	1566	1713
T Screen 1%	108"	382	434	477	530	614	667	711	808	905	1057	1217	1376	1536	1696	1854
T Screen Deco 1%	120"	410	467	516	613	660	719	766	873	979	1140	1311	1482	1654	1824	1995
Verona Twilight	132"	440	501	594	655	708	770	823	953	1067	1221	1405	1588	1770	1954	2137
	144"	470	534	631	697	754	822	878	1017	1140	1303	1498	1693	1889	2084	2279
	156"	498	607	669	740	801	872	934	1081	1214	1384	1592	1799	2006	2212	2420
	168"	528	641	707	782	848	924	989	1146	1287	1467	1685	1905	2123	2343	2561
	180"	558	676	745	825	895	974	1045	1211	1359	1549	1780	2010	2241	2472	2702
	192"	586	709	783	867	941	1026	1100	1274	1433	1630	1873	2116	2359	2600	2843

● Width (Inches)

● Height (Inches)

PRICE GRID 7 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
Natte 5%	36"	227	255	276	304	324	353	374	422	515	611	709	807	906	1004	1102
Sheerweave 7100 BO	48"	260	294	319	353	378	412	437	496	599	705	816	929	1041	1153	1266
Sheerweave 7600 BO	60"	294	332	363	402	431	471	500	570	683	798	924	1049	1176	1301	1428
Sheerweave 7800 BO	72"	326	370	406	449	485	529	564	686	766	891	1030	1170	1310	1450	1590
Sheerweave 8000 3% PVC Free	84"	360	409	448	498	538	587	669	760	850	986	1138	1292	1445	1598	1752
T Screen KOOL BLACK 3%	96"	393	447	493	547	632	687	732	833	934	1095	1258	1423	1586	1749	1913
T Screen KOOL BLACK 5%	108"	426	487	535	596	686	745	796	906	1017	1188	1366	1543	1720	1898	2075
Vizela	120"	460	524	580	684	739	805	860	981	1100	1283	1472	1664	1855	2046	2238
	132"	494	562	661	732	793	863	922	1070	1200	1376	1580	1785	1990	2195	2400
	144"	527	601	706	780	846	921	987	1143	1284	1469	1688	1906	2124	2343	2562
	156"	560	678	748	829	900	981	1050	1216	1367	1564	1795	2028	2260	2491	2724
	168"	594	717	793	878	953	1039	1113	1290	1451	1657	1903	2149	2395	2640	2886
	180"	628	755	835	926	1007	1097	1178	1363	1535	1751	2010	2269	2529	2788	3049
	192"	660	794	879	974	1060	1155	1241	1437	1619	1844	2118	2390	2664	2937	3210

● Width (Inches)

● Height (Inches)

PRICE GRID 8 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
E Screen KOOL BLACK 5%	36"	242	271	294	324	347	377	398	451	547	650	753	856	960	1064	1167
Sheerweave 7000 BO	48"	277	313	340	377	404	440	467	530	637	752	870	988	1107	1224	1343
Sheerweave 7400 BO	60"	313	355	387	429	462	504	535	611	728	853	987	1119	1252	1385	1519
Sheerweave Infinity2 1%	72"	350	395	435	481	519	567	605	734	819	955	1102	1251	1399	1547	1696
Sheerweave Infinity2 3%	84"	385	438	481	533	578	630	716	812	909	1056	1219	1382	1545	1708	1871
Sheerweave Infinity2 5%	96"	421	478	528	586	676	735	783	891	1001	1173	1348	1522	1698	1872	2047
T Screen KOOL BLACK 1%	108"	458	520	576	638	734	798	853	972	1092	1275	1465	1655	1843	2033	2223
	120"	493	562	622	731	792	861	921	1052	1182	1377	1580	1786	1990	2194	2399
	132"	529	603	708	783	849	925	990	1147	1288	1479	1698	1918	2137	2355	2574
	144"	566	644	755	835	907	988	1059	1227	1379	1579	1815	2048	2282	2516	2751
	156"	601	725	801	888	965	1052	1128	1306	1469	1682	1930	2179	2428	2678	2927
	168"	637	767	849	940	1023	1114	1197	1385	1560	1784	2047	2311	2575	2839	3103
	180"	672	808	897	993	1080	1179	1266	1466	1651	1885	2165	2442	2721	3000	3279
	192"	709	850	942	1045	1138	1241	1335	1545	1742	1986	2280	2574	2867	3161	3453

● Width (Inches)

● Height (Inches)

PRICE GRID 9 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
E Screen Chroma 3%	36"	270	304	330	364	389	423	448	508	611	728	843	956	1070	1183	1295
E Screen KOOL BLACK 3%	48"	311	352	384	424	456	496	528	600	716	847	976	1108	1238	1370	1499
GreenScreen NATURE 5%	60"	353	399	438	484	523	569	607	692	820	964	1111	1259	1408	1555	1703
Sheerweave 2390 Performance Plus 5%	72"	393	446	492	545	588	642	687	827	925	1081	1247	1411	1576	1742	1906
Sheerweave 2410 Performance Plus 3%	84"	436	495	546	605	656	716	807	918	1030	1198	1381	1564	1745	1928	2110
Sheerweave 2500 Performance Plus 1%	96"	476	543	600	665	763	830	886	1011	1135	1331	1527	1725	1922	2118	2314
	108"	518	589	654	725	829	903	966	1102	1240	1450	1662	1876	2090	2304	2518
	120"	559	637	708	826	897	975	1045	1195	1345	1567	1798	2029	2259	2490	2721
	132"	600	685	800	886	962	1048	1125	1303	1465	1684	1932	2180	2428	2677	2925
	144"	641	734	854	947	1029	1121	1204	1395	1570	1801	2067	2333	2597	2863	3129
	156"	683	819	908	1008	1096	1195	1284	1487	1675	1920	2202	2484	2767	3050	3332
	168"	724	867	962	1067	1163	1268	1362	1578	1780	2036	2336	2636	2936	3235	3535
	180"	765	915	1017	1128	1230	1341	1442	1672	1884	2154	2471	2788	3106	3422	3740
	192"	807	962	1071	1188	1296	1413	1521	1763	1989	2271	2607	2940	3274	3608	3942

● Width (Inches)

● Height (Inches)

PRICE GRID 10 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
E Screen KOOL BLACK 1%	36"	343	387	421	464	498	542	576	653	774	930	1067	1206	1344	1483	1621
Flocke	48"	398	449	493	545	586	638	682	776	914	1087	1248	1410	1571	1733	1895
Laminates	60"	453	513	564	624	676	737	788	900	1054	1243	1429	1614	1799	1983	2169
	72"	507	577	636	705	765	833	894	1065	1195	1401	1609	1818	2027	2233	2442
	84"	562	639	708	784	853	931	1041	1188	1335	1559	1790	2021	2254	2485	2716
	96"	616	702	779	865	983	1070	1147	1311	1476	1732	1983	2234	2486	2738	2989
	108"	671	765	851	946	1072	1167	1253	1434	1617	1890	2165	2438	2713	2988	3263
	120"	725	829	922	1066	1161	1265	1359	1558	1756	2047	2345	2643	2942	3239	3536
	132"	780	891	1035	1147	1249	1362	1465	1697	1911	2205	2526	2846	3168	3490	3810
	144"	834	955	1106	1227	1339	1460	1571	1819	2051	2363	2706	3051	3395	3740	4084
	156"	889	1057	1178	1307	1428	1558	1677	1942	2193	2519	2887	3254	3622	3990	4358
	168"	943	1120	1249	1388	1516	1655	1784	2066	2333	2677	3068	3458	3850	4240	4631
	180"	999	1184	1321	1468	1605	1752	1890	2189	2473	2834	3249	3662	4077	4491	4905
	192"	1054	1247	1393	1548	1694	1850	1995	2312	2614	2992	3429	3866	4304	4741	5178

● Width (Inches)

● Height (Inches)

PRICE GRID 11 MSRP

BRACKETS & ACCESSORIES

Banded Shade Coupler Acmeda 44	84
4" Fascia Bracket & Indexable Coupler Set	123
7" Fascia Dual Shade Bracket	224
7" Dual Coupler Set	330

SPRING ASSIST

R Series Pin End Spring Assist	34
Skyline Pin End Spring Assist	34
R Series & Skyline Spring Assist 36"	171
R Series & Skyline Spring Assist 45"	175

MANUAL CLUTCH ACCESSORIES

SafetyHold3	4
Stainless Steel & Other Finish Chain	11
Outdoor Clutch	6
Galaxy 200 Clutch	46
Galaxy 400 Clutch	59
EasySpring Plus Cordless System	87
Batten Surcharge Per Foot, Per Batten	19

SKYLINE BOTTOM UP ROLLER SHADES

Width	36"	48"	60"	72"	84"	96"
MSRP	293	366	439	512	586	658

PRICE GRID 11 MSRP CONTINUED

FASCIA-includes brackets

3" Uncovered Fascia

4" Uncovered Fascia

5" Uncovered Fascia system (dual or single)

7" Dual Shade Uncovered Fascia

3" Covered Fascia

4" Covered Fascia

5" Covered Fascia

 Width (Inches)**CASSETTES**

Cassette 100

Cassette 120

 Width (Inches)**VALANCE & HEM BAR**

Standard Inserted Valance

Soft Valance

External Oval Hem Bar

 Width (Inches)**HANGER**

SB21-0514-075490 I Clip Recess Closure White (No Lip)

SB21-0514-020490 I Clip Recess Closure Ano (No Lip)

 Width (Inches)**POCKET-CONTRACT****RCCP3W 3" Pocket Contract (3.51" x 3.09") White**

RCBC2W Bottom Closure for 3" (2.22") White

RCEP3W End Plate for 3" Pocket White, Pair, Inc screws

RCCP3A 3" Pocket Contract (3.51" x 3.09") Ano

RCBC2A Bottom Closure for 3" (2.22") Ano

RCEP3A End Plate for 3" Pocket Ano, Pair, inc screws

RCCP4W 4" Pocket Contract (4.51" X 4.09") White

RCBC3W Bottom Closure for 4" (2.73") White

RCEP4W End Plate for 4" Pocket, White, Pair

RCCP4A 4" Pocket Contract (4.51" X 4.09") Ano

RCBC3A Bottom Closure for 4" (2.73") Ano

RCEP4A End Plate for 4" Pocket, Ano, Pair

RCCP5W 5" Pocket Contract (5.63" X 5.30") White

RCBC5W Bottom Closure for 5" (2.67") White

RCEP5W End Plate for 5" Pocket, White

RCCP5A 5" Pocket Contract (5.63" X 5.30") Ano

RCBC5W Bottom Closure for 5" (2.67") Ano

RCEP5W End Plate for 5" Pocket, Ano, Pair

RCCP6W 6" Pocket Contract (6.13" X 5.81") White

RCBC6W Bottom Closure for 6" (3.6") White

RCEP6W End Plate for 6" Pocket, White, Pair

RCCP6A 6" Pocket Contract (6.13" X 5.81") Anno

RCBC6A Bottom Closure for 6" (3.6") Ano

RCEP6A End Plate for 6" Pocket, Ano, Pair

Note: Shade Pocket Sizing: OB Exact Width, IB Width less 1/8". A pair of end caps further reduce width by 3/16"

 Width (Inches)**SIDE CHANNELS- PRICE GRID IS BASED ON HEIGHT**

RS-TC1-5 OB Mount Commercial Side Channel 2.17"x 1"

RS-VE1-5 Fabric Guide OB Commercial Side Channel-each

RS-TE1-5 IB Mount Commercial U Channel 2.17" x 1"

RS-VJ1-5 Fabric Guide U Channel

 Height (Inches)

Note:MSRP is for 1 channel only but typically 2 are used

Note: Both Commercial Side Channels and fabric Guides are available in White, Alabaster, Anodized, Bronze and Black

Note: Side Rails include black 7mm x 5mm brush strip

Porter Preston

61 Mattatuck Heights Road

Waterbury, CT 06705

PH 866-753-1113

FX 203-597-8828

customerservice@porterpreston.com
www.porterpreston.com

LUTRON COMPATIBLE SHADE POCKET**Shade Pocket (3.5"x3.5") White**

Bottom Closure for 3.5" White

End Cap for 3.5" Pocket, White, Pair

Note: White only, other colors available by special order

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
120	140	160	180	200	220	240	280	320	360	400	440	480	520	560
39	46	52	59	65	72	78	91	104	117	130	143	156	169	182

36

Shade Pocket (4.75" X 5") White

Bottom Closure for 4.75" White

End Cap for 4.75" Pocket White, Pair

Note: White only, other colors available by special order

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
171	200	228	257	285	314	342	399	456	513	570	627	684	741	798
60	70	80	90	100	110	120	140	160	180	200	220	240	260	280

55

● Width (Inches)

AUTOMATE RADIO COMMUNICATION BY ROLLEASE ACMEDA**PRICE GRID 14 MSRP**

PART #	MOTORS	
MTDCBRF18-0.2	18mm .2nm 12v RF Li-ion Rechargeable Motor	302
MTDCBRF25-1.1	Li-ion 1.1	399
MTDCBRF25-1.1Short	Li-ion 1.1 Short	344
MTDCBRFQ28-2	Li-ion Q2.0	486
MTDCBRF35-3	Li-ion 3.0	594
MTDCBRFQ45-3	Li-ion Q3.0	637
MTDCBRF45-10	Li-ion Q10	680
CHARGER/CONTROLS		
MTDCB-CHARGE	Recharger 12V Battery Motors (25, 28, 35, 45)	59
MTRF-REM 1C	Automate 1 Channel RF Remote - White	105
MTRF-REM-15	Automate 15 Channel Remote w/Level Control WHITE	124
MT02-0101-067004	AUTOMATE Push5 White Remote	107
MT02-0101-067008	AUTOMATE Push15 White Remote	124
MT02-0101-050004	AUTOMATE Push5 Black Remote	107
MT02-0101-050008	AUTOMATE Push15 Black Remote	124
MTRF-SW5-FLUSH	5 Channel Wall Switch - Surface Mount	95
MTRF-WS-1C	1 Channel Wall Switch - Cut In	81
MTRF-WS-2C	2 Channel Wall Switch - Cut In	90
MTRF-WS-15	15 Channel wall switch -Cut In	100
MTRF-SUNSENS	Sun Sensor	67
MTRF-WIFIBRIDGEKIT	PULSE Wi-Fi to ARC - 2 way RF Bridge Kit	437
MT03-0302-067001	AUTOMATE Solar Panel 2.0	331

Note: These costs represent the upcharge to motorize Pristine Roller Shades with Automate Radio Communication (ARC).
Add this cost to the manual shade cost