Operating Instruction and Parts Manual for

KNC 80 Concrete Vibrator






WARNING

DO NOT ATTEMPT TO START OR OPERATE THE MACHINE UNTIL ALL THE INSTRUCTIONS HAVE BEEN READ AND UNDERSTOOD BY THE OPERATOR. FAILURE TO DO SO COULD RESULT IN SERIOUS BODILY INJURY AND/ OR PROPERTY DAMAGE!

KUSHLAN PRODUCTS.LLC

10601 S. Sam Houston Pkwy W., Ste 140
——Houston, TX 77071
281-313-2506 • 800-469-4178

- 1. Make sure milled nut 3 which is used to connect motor and tap hose, is fixed before start the machine. Milled nut can be fixed by turning it to left.
- 2. Do not switch off or cut off the electricity supply when tap hose is taping concrete, or tap hose would become involved in concrete and difficult to be got out due to cease of vibration.
- 3. Pay attention to the fraying condition of carbon brush, please renew it when it is frayed to 6mm, or motor will be injured.
- 4. Check seal condition of all the joint between tube and tap hose during using it(please turn to left to fix connector), do not let water and concrete get into vibrator and damage the bearing and oil tight in it and result it in the cease of machine finally. Prevent motor from water and concrete can prolong the useful time of it.
- 5. Stop using of machine as soon as the appearance of abnormal voice, over great spark from brush, over high temperature and peculiar smell, and go on to use it after researched the reason and repaired.
- 6. Each time after 100 hours use of machine, please take apart spare parts as tube, rotating shaft and hose to clean and replace lubricant grease, examine whether rubber oil tight and O type seal ring still well, replace them with new one if they are damaged. Please be informed that there should be no water and oil in the lower lumen of oil tight, otherwise vibrator will vibrate in weak power. In order to prevent vibrator from water, please use 0.2mm polytetrafluoroethylene belt to pack threading when you seal threading joint in assembling the machine.
- 7. Please clean the outside of machine, pony roll and tie up cable wire every time after you used it. Do not leave them lying about.

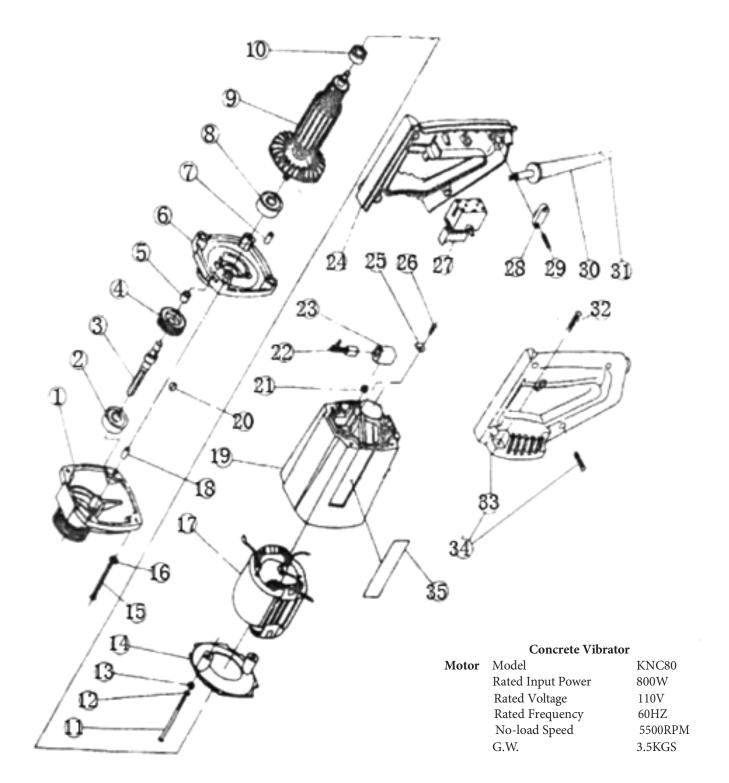


Model KNC 80 Parts List

ITEM	PART NO	DESCRIPTION	QUANTITY
1	600001	Gear box	1
2	600002	Bearing 60200	1
3	600003	Major axis	1
4	600004	Gear wheel	1
5	600005	Oil bearing 8E8x12x8	1
6	600006	Middle cover	1
7	600007	Shim 6x10	1
8	600008	Bearing 60200	1
9	600009	Rotator	1
10	600010	Bearing 60027	1
11	600011	Stator screw M4x70	2
12	600012	Spring pad	2
13	600013	Washer 4-140-Zn-D	2
14	600014	Air seal plate	1
15	600015	Screw	4
16	600016	Spring pad 5	4
17	600017	Stator M5x32	1
18	600018	Shim 6x14	1
19	600019	Cabinet	1
20	600020	Half-round key 3x10	1
21	600021	Screw M4-ZnD	2
22	600022	Carbon brush	4
23	600023	Carbon brush holder	2
24	600024	Right handle	1
25	600025	Support plate	2
26	600026	Screw	2
27	600027	Switch DKP1-5G	1
28	600028	Wire clamp	1
29	600029	Wire clamp screw	2
30	600030	Cable jacket	1
31	600031	Cable	1
32	600032	Screw	2
33	600033	Self-drilling Screw ST 4.8x25-C-H	4
34	600034	Left Handle	1
35	600035	Name plate	1

KNC80 VIBRATOR HOSE DIAGRAM & PART LIST

Vibration stickKNC25KNC35Diameter25MM35MMVibrating Frequency50/60HZ50/60HZVibrating Amplitude0.8MM0.8MMLength400MM400MM

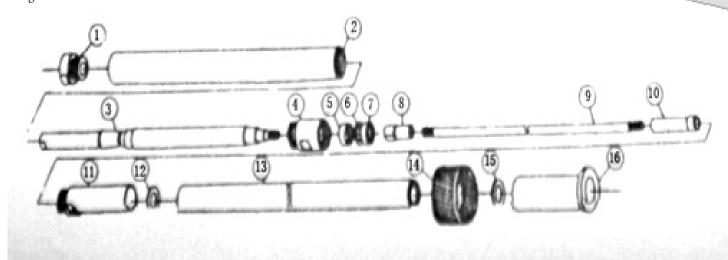

ITEM	PART NO	DESCRIPTION	QUANTITY
1	350001	VIBRATOR HEAD	1
2	350002	COVER TUBE	1
3	350003	STICK	1
4	350004	BEARING SEAT	1
5	350005	OIL SEAL	2
6	350006	WASHER	1
7	350007	BEARING SEAT	1
8	350008	SHAFT CONNECTOR II	1
9	350009	FLEXIBLE SHAFT	1
10	350010	SHAFT CONNECTOR I	1
11	350011	FLEXIBLE HOSE CONNECTOR I	1
12	350012	WASHER	1
13	350013	FLEXIBLE HOSE	1
14	350014	CONNECTING NUT	1
15	350015	WASHER	1
16	350016	FLEXIBLE HOSE CONNECTOR II	1

Kushlan Products

Limited Warranty Policy

Kushlan Products makes every effort to assure that its products meet high quality and durability standards and warrants to the original retail consumer purchaser of our products (you) that each such product be free from defects in materials and workmanship as follows:

ONE(1)YEAR limited warranty on motors. This warranty covers replacement of parts found to be defective in material or workmanship for a period of 90 days from the date of purchase. This warranty does not apply to typical replacement of parts or assemblies that fail as a consequence of normal wear and tear, for example bushings, tires, belts, and pinion gears.

This warranty does not apply to defects due, directly or indirectly. to misuse. abuse .negligence or accidents .repairs or alter actions outside our facilities or the lack of maintenance .WE LIMIT ALL IMPLIED WARRANTIES TO THE PERIOD SPECIFIED ABOVE FROM THE DATE OUR PRODUCT WAS PURCHASED AT RETAIL .EXCEPT AS STATED HEREIN. ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS ARE EXCLUDED. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG THE IMPLED WARRANTY LASTS. SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. WE SHALL IN NO EVENT BE LIABLE FOR DEATH, INJURIES TO PERSONS OR PROPERTY OR FOR INCIDENTAL, CONTINGENT, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OF OUR PRODUCTS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

To take advantage of this warranty, the product or part must be returned for examination, postage prepaid. To Kushlan Products. Proof of purchase date and an explanation of the complaint must accompany the merchandise. If our inspection discloses a defect, we will either repair or replace the product, at our election or we may elect to refund the purchase price if we cannot readily and quickly provide you with repair or replacement, if you are willing to accept such refund. We will return the repaired product or replacement at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of storing and returning this product. This warranty gives you specific legal rights, and you may also have other right which vary from state to state. For service. Contact Kushlan Products 12010 Dairy Ashford Road, Suite 160 Sugar Land, TX 77478 o Phone (281)313-2506 Fax (281)313-2509

