

August 1 2022

Pristine

Roller Shade MSRP



Photograph courtesy of Phifer



Proudly Made In America

PORTER PRESTON

Quality Wholesale Window Coverings
Contract • Hospitality • Residential

www.porterpreston.com • Tel: 866-753-1113 • Fax: 203-597-8828 • email: customerservice@porterpreston.com



Quality Wholesale Window Coverings
Contract • Hospitality • Residential

Table of Contents

Page

Measuring & Ordering

Selecting the Type of Mounting.....	1
Fabric Deductions & Light Gaps.....	1
The Wrap-Do I add the fabric that wraps around the tube?.....	2
Fabric Tracking & Telescoping.....	2
Railroading.....	2
Wide Shades.....	2
Seams.....	2
Regular Roll or Reverse Roll?.....	2
Safety Hold Tension Device.....	3

Shade Options

Clutch and Bracket Selection.....	4
Roller Shade Control Options	
Clutch.....	5
Spring Assist.....	5-6
Chain Options.....	6
Cordless Spring Rollers.....	7-8
Spring Roller Shade.....	9
Hem Bar Options.....	9
Skyline Bottom Up Roller Shades.....	10
Roller Shade Valance Closure Options	
Soft Valance.....	11
Inserted Fabric Valance.....	11
3" Uncovered Skyline Fascia Valance.....	11
3" & 4" Uncovered Square Aluminum Fascia Valance.....	12
3", 4" and 5" Fabric Wrapped Square Fascia Valance.....	12
Universal 5" Fascia System.....	13
7" Square Fascia System.....	14
Cassette 100 and Cassette 120.....	15-16
Lower Access Fascia/Flap & Hanger.....	17
3", 4", 5", 6" Shade Box Valance with Bottom Closure.....	18
Side Rails, Sill Channel & Zip Tracks.....	19

Motorization

Somfy Battery Powered Motors & Controls.....	20-22
Somfy Rechargeable Solar Battery Pack.....	23
Wired.....	24-26
Controls.....	27-28
myLink RTS Smartphone and Tablet Interface.....	29-30
Rollease Automate Radio Communication.....	31-33

Shade Material

Solar Screens, Translucents, Blackouts.....	34
The Glow Effect.....	35
Shade Roll-Up Diameters.....	35
Roller Shade Fabrication Chart.....	36
Fabric Specifications.....	37-38

MSRP	39-50
-------------------	-------

Warranty	51
-----------------------	----

Selecting the Type of Mounting

Determine whether the roller shade is going to be installed inside the window frame or outside the window frame.

Inside Mount (IM) or Inside Bracket (IB)

Inside mount installations are mounted inside a window frame or some other recessed area.

Measuring Width and Length for Inside Mount

Width: measure across the top, middle, and bottom of the window opening. Using the narrowest dimension, measure to the nearest 1/8". By using the narrowest measurement the shade will operate correctly.

Length: measure the vertical dimension of the left, center and right side. Use the longer measurement, measure to the nearest 1/8". The factory will make the appropriate deductions from your measurements on both the tube and the fabric. Do not make any width or length deductions or additions.

Outside Mount (OM) or Outside Bracket (OB)

Outside mount installations are mounted on the wall, ceiling or on the window molding.

Measuring Width and Length for Outside Mount

Width: measure the width of the window opening from left to right and add as many inches as desired for maximum light gap coverage and privacy. If the shade is to be mounted to trim or framing around the window measure from the trim's outside edge left to right. The factory will make deductions from your measurements on both the barrel and fabric. Once you determine the desired width, round to the nearest 1/8".

Length: measure the window opening from top to bottom and add as many inches as desired to this measurement to allow space for mounting brackets above the opening and enough overlap at the bottom to avoid a light gap. Once you determine the desired height, round it to the nearest 1/8". The factory will make the appropriate allowance for the fabric wrap on the roller tube. If there is trim or framing around the window, measure from the trim's outside edge top to bottom, provided the trim provides the flat space required for an outside mount. If not you can mount the shade to the wall above the trim. In addition, if the window sill protrudes outside the window opening at the bottom of the window measure just to the bottom of the sill.

Confirming Measurements

It is standard to order width first and length second. The most common error in ordering roller shades is reversing the width and length measurements. Always confirm that the width is the measurement that goes across from left to right and that the length is the measurement that goes from top to bottom.


Fabric Deductions & Light Gaps

It is extremely important to note when measuring for roller shades that the actual fabric width of the shade will be less than the window measurement provided. To allow for the space that the shade brackets, clutch or motor, and the idler end take up, the factory must make a deduction so that the finished measurement or bracket to bracket measurement of the shade fits into the width dimension provided.

Please note the below deductions taken by the factory for roller shades without valances.

Type of Shade Operation	Fabric Width Deduction
Metal Spring Roller OB	-1"
Metal Spring Roller IB	-1"
R-Series Clutch 1 1/4" tube OB	-1 1/4"
R-Series Clutch 1 1/4" tube IB	-1 3/8"
R-Series Clutch 1 1/2" tube OB	-1 3/8"
R-Series Clutch 1 1/2" tube IB	-1 1/2"
R-Series Clutch 2" tube OB	-1 1/2"
R-Series Clutch 2" tube IB	-1 5/8"
Skyline Clutch OB	-1 1/4"
Skyline Clutch IB	-1 3/8"

Please Note: When a shade is over 100" in width or length an additional 1/8" is deducted from the fabric width

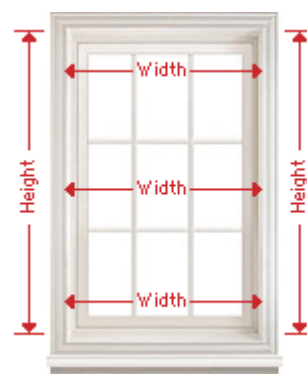

IB Measuring



OB Measuring

Shade Measurements: (Critical Note)

If a specific fabric width is required, please make it explicitly known that this is fabric width. We suggest that this only be done for outside mounts.

Measure Twice.....Because We Cut Once!

"The Wrap" - do I have to add the fabric that wraps around the tube?

The wrap is the amount of fabric that is added to the window opening length by the factory. The wrap will be added to the window opening size. When measuring the length of the shade measure from the top to the bottom of the window opening. Do not include any extra for the wrap, as this extra material is included automatically by the factory. The standard wrap for motorized and clutch roller shades is 10". The standard wrap for spring roller shades is 12".

Fabric Tracking & Telescoping

Roller shades that exceed a 3 to 1 length to width ratio meaning the shade is more than 3 times longer than it is wide, may have problems tracking or rolling up straight (think of putting paper towels back on the roll). This tracking issue, commonly referred to as telescoping, is an inherent characteristic of roller shade fabrics and should be explained to the end user.

Railroading

In order to make a shade that is wider than the fabric roll width, the fabric will be railroaded or turned sideways and cut to the width of the shade. Note: when railroaded you may see "curling" on the outer vertical edges of the shade. If curling is objectionable consider using a different wider fabric or battens (See Price Grid 11 page 39)

Wide Shades Shades over 126" may exhibit certain aesthetic characteristics such as smile lines, waves, wrinkling on the tube that could result in permanent damage to the fabric. Please consider speaking to Customer Service about splitting your shade with the use of couplers.

Seams In cases where the fabric is wider *and* longer than the width of the fabric roll, a second piece of fabric will be cut and welded (spliced) to the first fabric piece. A "Roman Look Roller Shade" is a perfect way to hide a seam as Pristine's joint seams and "Roman Look" seams are practically indistinguishable.

Roller Shades... Regular Roll or Reverse Roll ?

Regular Roll

Regular roll shades indicate that the shade fabric rolls off the back of the roller tube. The shade cloth will be closest to the window with this option.


Regular roll shades are industry standard and yield the highest levels of energy conservation because of the shade's close proximity to the glass.

Reverse Roll


Reverse roll shades indicate that the shade fabric rolls off the front of the roller tube. The shade cloth will be furthest away from the window with this option.

Reverse roll shades are most commonly used for the following applications:

- To avoid window obstruction (door handle, etc.)
- To reduce light gaps for corner or bay windows



Telescoping and Tracking



Regular Roll



Reverse Roll

RollEase®


SafetyHold™

Bead Chain or Cord Loop Hold Down Device



Safety Instructions:

A WCMA 5.2.3 Warning Tag (available from RollEase®) must be fastened to the device prior to shipping.



The SafetyHold3 must be secured to the clutch or headrail to make the shade inoperable without purposeful action of installer.



Use appropriate anchors when installing.

Installation Instructions:

To ensure safety, SafetyHold3 must be installed properly following these five steps.



Thread bead chain (or cord) through base and around guide (flat side of base facing guide).



Push insert into guide until rounded edge is resting on the bead chain. (For cord, flip insert so opposite side with serrated edge is resting on cord.)



Squeeze guide legs while sliding spring over guide completely. (Be sure spring is all the way over the legs of the guide).



Slide base, flat side down, over curved end of guide.



Using screws provided, attach to wall, allowing some slack for bead chain connectors to slide through easily.

Patented Device:

RollEase offers this patented device for cord loops and bead chain loops. SafetyHold3 complies with the WCMA-ANSI standard 6.5 that requires a hold-down device to make the shade partially inoperable unless the hold-down device is installed.

The hold-down device is designed for continuous cord or bead chain loops that allows stop balls and/or connectors to pass through.

Parts Included:



Test Data:

- Meets WCMA standards for hold down devices.
- Tested to ensure 10 year life of product.



Child Safety

Child safety is of the utmost importance to Porter Preston. That's why we use warning tags and warning labels to highlight the potential hazards of corded window coverings. The tags and labels are attached to every one of our corded window treatment products. Porter Preston suggests choosing cordless alternatives or products with inaccessible cords.


Window Cord Safety

Parents and caregivers should pay close attention to window cord safety and the danger of children becoming accidentally entangled and possibly strangled in the window cords. Strangulation can occur when a child or pet places his or her neck between the exposed lift cord and the fabric on the back side of the shade.


Clutch & Bracket Selection

To determine the clutch and tube used by the factory for a specific shade, refer to the **Roller Shade Fabrication Chart** on page 38.

R Series clutch and pin colors are black & white ♦ R Series bracket colors are zinc, black and white ♦
R Series fascia bracket colors are gray, black, bronze, vanilla and white ♦ R Series square fascia face plate colors are silver, black, bronze, vanilla and white

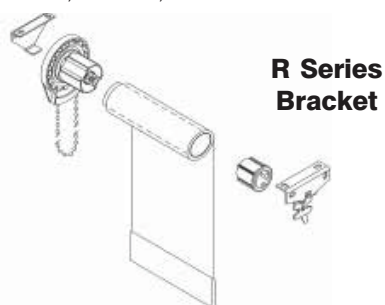

R Series Bracket

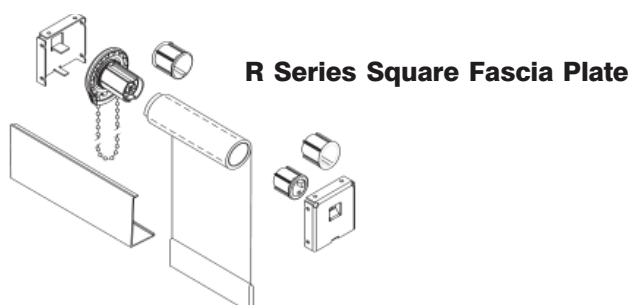


R Series Square Fascia Plate

Skyline clutch and pin colors are black, brown, cream, grey, vanilla and white ♦ Skyline bracket colors are silver, black and white ♦ Skyline bracket cover colors are black, brown, cream, grey, vanilla and white ♦
Skyline fascia bracket colors are black, brown, grey, vanilla and white



Skyline Hardware



Universal R-Series Bracket

Shown for a Wall Mount Application



Universal Skyline Bracket

Shown for a Ceiling Mount Application

Clutch	Bracket	Ceiling Mount Installation		Wall Mount Installation	
		Projection	Height	Projection	Height
R-8	RB360	1 7/8	2 7/8	2 3/8	2 3/8
R-8	RB360	1 7/8	3 3/8	2 7/8	2 3/8
R-16	RB560	2 5/8	3 1/8	2 15/16	3 1/4
R-16	RB560	2 11/16	4	3 7/16	3 1/4
R-24	RB580	3 9/16	4 5/8	3 7/8	4 5/16
SL-10	SLB660	2 1/4	3	2 5/8	2 3/8
SL-15	SLB660	2 1/4	3 1/8	2 3/4	2 5/8
SL-20	SLB660	2 3/4	3 1/4	3	3 1/8
SL-10	SLB680	2 3/16	3 1/2	3 1/8	2 3/8
SL-15	SLB680	2 1/4	3 5/8	3 1/4	2 5/8
SL-20	SLB680	2 11/16	3 3/4	3 1/2	3 1/8
R-Series/Skyline	3" Fascia	3	3	3	3
R-Series/Skyline	4" Fascia	4	4	4	4
R-Series/Skyline	5" Fascia	5	5	5	5

*Please note: Measurements for Ceiling Mount Installation take into account the width of the clutch as part of the overall projection but does not take into account the roll diameter which may be greater. The height is the distance from the foot of the bracket to end of the mounting bracket.

*Please note: Measurements for Wall Mount Installation take into account the distance from the foot of the bracket to the end of the clutch for the overall projection but does not take into account the roll diameter which may be greater. The height is determined by the overall height of the clutch. (All other dimensions are overall net dimensions)

Roller Shade Control Options

Pristine Roller Shades can be operated by either standard clutch, spring assist, spring roller or motorized options.

Standard Clutch Roller Shade

This roller shade is operated manually with a self-lubricating clutch mechanism. With a continuous loop control chain, shades can be rolled up, exposing a room to sunlight, or down to filter or block out the sunlight from entering the room.

Outdoor Clutch: Featuring Stainless Steel interior components and warranted for 10 years(See Price Grid 11 Pg 44)

Galaxy Clutch: An option other than a Spring Assist is a Galaxy Clutch. These are gear reduction clutches that will reduce the pull forces required to operate larger shades.

Caution:

Most clutches operate on a 1:1 gear ratio: meaning you pull chain 2 feet the shade moves 2 feet. By nature a Galaxy clutch, in order to reduce the pull force, will have up to 2 feet of chain pull to 1 foot of shade movement. As a result a chain stop cannot be used.

Two Models of Galaxy Clutches are available:

MSRP

G-200, for 1 ½" & 2" tube
G-400, for 1 ½", 2", 2 ½" & 3" tube

Price Grid 11 pg 44

Price Grid 11 pg 44

Spring Assist


When shades get larger even with stronger clutches the pull forces required get greater. Pristine offers 2 different spring assist systems to help: pin end spring assist & clutch spring assist.

When a shade is lowered, gravity is used to coil a spring attached to the pin-end side of the shade. When the shade is raised the coiled spring assists the operator by reducing the pull force required up to 40%. The pin end spring assists are available with 1 ½ "tubes.

The clutch side spring assists come in 2 sizes and will also add to the minimum width of the shades. These additions to the minimum width of the shades are usually not an issue as they are used on larger shades anyway.



Rollease Skyline Clutches

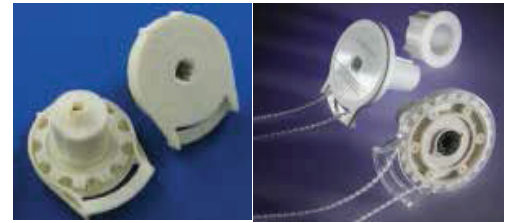

R Series Clutches

Galaxy Clutches



Outdoor R Series Clutch



Skyline Outdoor Clutch



Pin End Spring Assist



Galaxy Geared Spring Assist

Spring Assists (continued)

Spring Assist	Tube Diameter	Pull Reduction	Max Drop	Minimum Shade Width	MSRP
R-Series Pin End Spring Assist	1-1/2"	to 40%	116"	24"	Price Grid 11 pg 44
Skyline Pin End Spring Assist	1-1/2"	to 40%	116"	24"	Price Grid 11 pg 44
R-Series & Skyline Spring Assist 36"	1-1/2" & 2"	to 6 lbs.	TBD	58"	Price Grid 11 pg 44
R-Series & Skyline Spring Assist 45"	1-1/2" & 2"	to 6 lbs.	TBD	58"	Price Grid 11 pg 44

Chain Options

Nickel Plated Steel (standard)
White, Off-White, Clear or Black Plastic

Surcharge Applies. Price Grid 11 pg 44

- Dungeon
- Gun Metal
- Aluminum
- Yellow Brass
- Mystic Red
- Medieval Brass
- Stainless Steel
- Antique Bown

CHAIN FINISHES



CHAIN CONNECTORS



OPEN BALLS



RollEase

CORDLESS SPRING ROLLERS



Child And Pet Safe Solutions And A Neater Appearance With No Messy Cords

EasySpring Plus: Superior Performance, Wide Selection, Child and Pet Safe

See Price Grid 11 Pg 44 for Pricing

Both EasySpring and EasySpring Plus cordless spring rollers eliminate concerns about safety and aesthetics often associated with a dangling cord and comply with WCMA/ANSI standards making roller shades safe for both children and pets.

The durable construction of the EasySpring Plus ensures years and years of reliable performance. Our unique cordless lift system is manufactured with just a few parts making it easy to assemble and quick to install. The EasySpring Plus's tight and secure fit into shade headers prevents shades from popping out of brackets.




EasySpring Plus offers a variety of systems—including options on tube and spring sizes, single and dual shade applications, and adjustable wheel brackets—making it the perfect choice for any shade application in homes, offices, planes, yachts, and other recreational vehicles.

- Child and pet safe
- Sleek window shade appearance
- Easy-to-assemble in your fabrication area and quick to install
- Available for shades up to 78" wide
- Single and Dual shade options
- 5 systems to choose from
- 2 bracket choices
 - With side adjuster for minimal light gap
 - With adjuster wheel for easy after installation adjustments
- 1½" (38mm) diameters
- 3 spring sizes for each tube size - for very small to very large windows*
- Speed reducer built into spring
- Use with Cassette 100 or Cassette 120 for a clean, polished look

Note 1: EasySpring Plus Max Roll Diameter is 2 3/8" Note 2: No fascia available but soft valance is available

**If you require different spring sizes, please contact your Porter Preston Customer Support Representative to discuss special orders.

EasySpring Plus Rollershade Chart

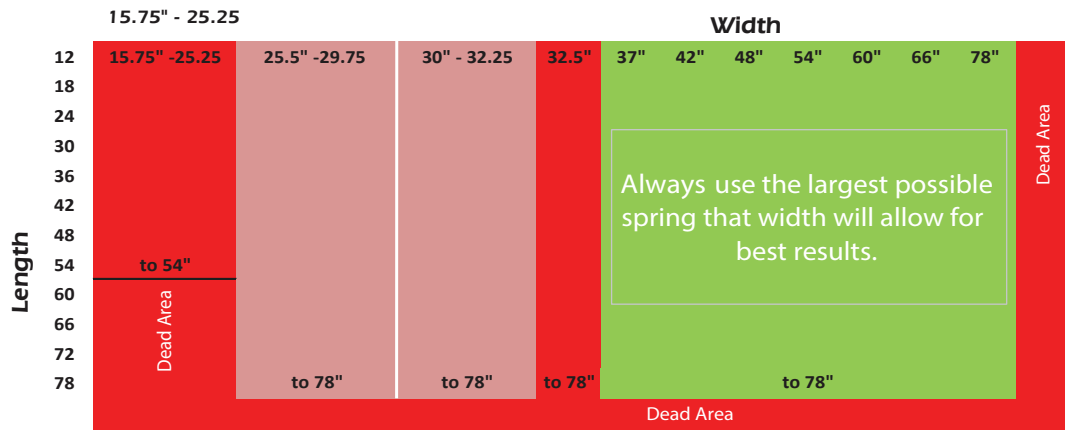

No Spring Available	
1.7 X 550mm (1.5")	RE0084400
1.5 X 450mm (1.5")	RE0080500
1.2 X 300mm (1.5")	RE0081400

Spring Size/Bracket Configuration	Spring Selection	Stopper (Idler)	Minimum Roller Shade Width (inches)
38mm (1.5") with Adj. wheel bkacket	1.2mmX300mm RE0080400	Regular 1.5" RE0081400	25 7/8
38mm (1.5") with Adj. wheel bkacket	1.5mmX450mm RE0080500	Regular 1.5" RE0081400	32 1/2
38mm (1.5") with Adj. wheel bkacket	1.7mmX550mm RE0084400	Regular 1.5" RE0081400	36 5/8
38mm (1.5") with Non Adj. wheel bkacket	1.2mmX300mm RE0080400	Regular 1.5" RE0081400	24 7/8
38mm (1.5") with Non Adj. wheel bkacket	1.5mmX450mm RE0080500	Regular 1.5" RE0081400	31 1/2
38mm (1.5") with Non Adj. wheel bkacket	1.7mmX550mm RE0084400	Regular 1.5" RE0081400	35 5/8

Spring Roller Shade

This roller shade is operated by a heavy-duty spring mechanism. All shades between 15" and 61" wide will be made with a 1" diameter metal tube. All shades between 61 1/8" and 97" will be made with a 1 3/8" diameter metal tube. Brackets are universal. By pulling on a handle or draw cord attached to the hembar, shades can be rolled up, exposing a room to sunlight, or down to filter or block out the sunlight from entering the room.

Minimum Width:	15"
Maximum Width:	97"
Minimum Height:	18"
Maximum Height:	108"

How to adjust the spring tension on a roller shade

The tension on the spring of your roller shade is already preset. If you wish or need to make any further adjustment, follow below noted procedures:

A: To Increase lifting power:

- 1) With the shade in the window, pull the shade part way down
- 2) Remove it from the mounting brackets and roll it half-way or so up
- 3) Replace it in the brackets of the windows and try it for tension and length that it will go down without being over-taught (unable to roll down anymore). Do not force it if it does not want to move downward as it is now over-wound - instead now try decreasing the tension as follows:

B: To Decrease lifting power:

- 1) With the shade in the window, roll the shade all the way up
- 2) Remove it from the mounting brackets and roll it half-way down or so
- 3) Replace it in the brackets of the windows and try it for proper lift & drop tension and travel distances top to bottom.

Note: If the shade will not travel all the way to the top, then the spring tension needs to be increased - follow procedure A.

If the shade will not travel all the way to the window sill or beyond, then the spring tension needs to be decreased - follow procedure B.

Hem Bar Options


- a. **Heatsealed Hembar:** This is Pristine's standard hembar. A weighted aluminum weight bar is inserted into a 1 1/2" heatsealed pocket. **The ends of the pocket are available sealed upon request for no additional charge.** Heatsealed hembars are included in all contract quotes.
- b. **External Hembar:** The External Hembar is an exposed aluminum hembar (see Price Grid 11, Page 45)



Heatsealed Hembar



External Hembar

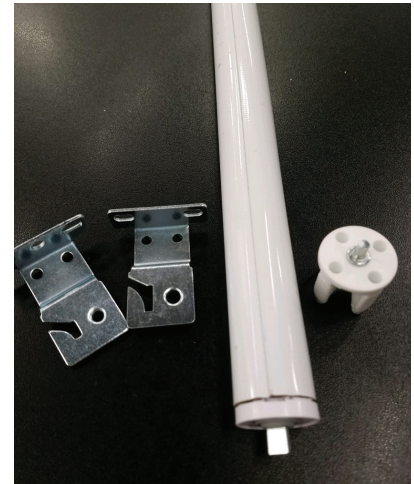


Skyline Bottom Up Roller Shades

Bottom up shades let the light in from the top of the window while shading the bottom section for privacy. This shade utilizes Skyline hardware combined with an innovative cord adjusting system to ensure a self-leveling hem bar. A geared clutch makes the system operation effortless.

See Price Grid 11, Pg 44 for MSRP

Skyline Chain Control

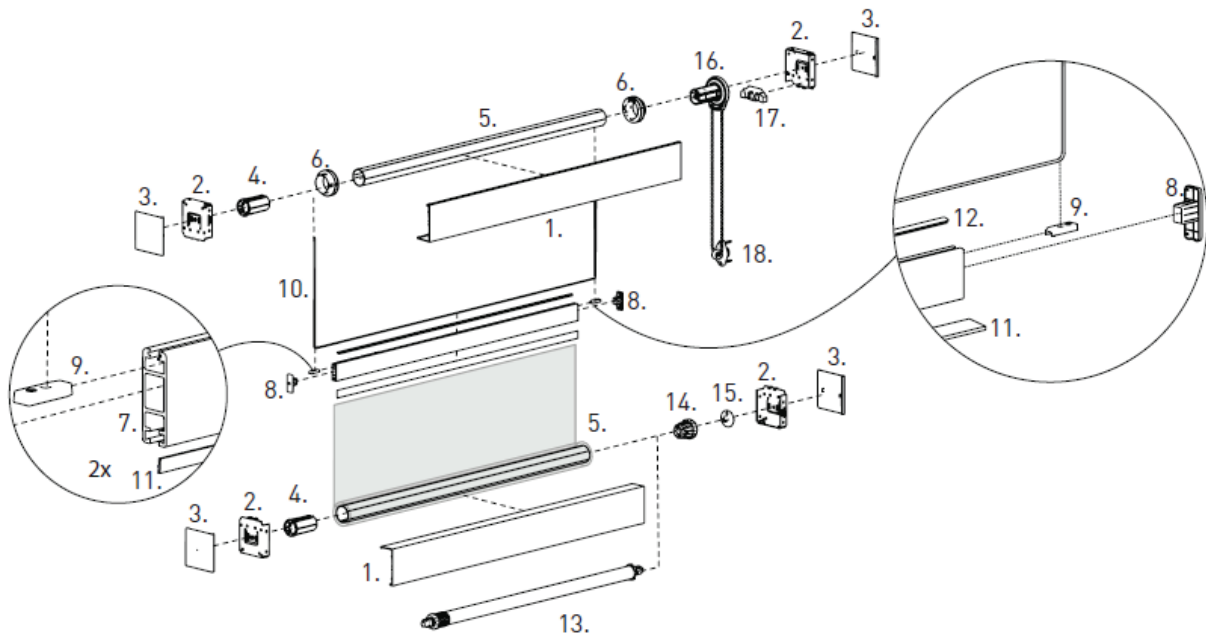

SYSTEM INDEX:


- | | |
|-----------------------------|--|
| 1. Skyline Fascia | 10. Cord |
| 2. Skyline Bracket | 11. Flat Spline |
| 3. Skyline Bracket Cover | 12. Bottom Up Rail Seal |
| 4. HD Pin End | 13. Booster Universal - 1.5" - No Stop |
| 5. 1.5" Tube | 14. Chainfree Control - 1.5" |
| 6. 1.5" Spool | 15. ESU Skyline Adapter |
| 7. Bottom Up Rail | 16. Skyline Clutch |
| 8. Bottom Up Rail Caps | 17. Skyline Chain Diverter |
| 9. Bottom Up Cord Guide Kit | 18. Chainhold Tension Device |

Roller Shade Valance Enclosure Options

Soft Valance

The soft valance is made out of the same fabric as the roller shade. The fabric valance has both a top and bottom pocket. The top pocket has a piece of wood inserted and the bottom pocket contains the same metal slat in the pocket as the roller shade. Screw through the top pocket and wood to mount the soft valance. The standard length is 6". It can be made any length up to 9" without a surcharge.

Roll: Available for regular roll and reverse roll shades
Color: Valance fabric matches shade fabric
Mount: Inside only (it does not have returns)
Maximum Width: 216"
See Price Grid 11
Page 45




Soft Valance

Inserted Fabric Valance

The Inserted Fabric Valance is a traditional dust cover vertical blind valance that uses 3 1/2" strips of roller shade fabric inserted into the groover channel of the valance. This valance features a continuous corner return that prevents the valance returns from separating from the valance. OB option requires separate brackets, nuts and bolts to attach valance to brackets.

Roll: Available for regular roll and reverse roll shades
Color: Valance fabric matches shade fabric
Mount: Inside or Outside
Maximum Width: 192"

See Price Grid 11
Page 45




Inserted Fabric Valance

3" Uncovered Skyline Fascia Valance

The Fascia system is a decorative cover compatible with Rollease Acmeda™ roller shade hardware systems. The system is multi-functional in both mounting and finished appearance.

Roll: Available for Regular Roll Only
Color: White, Vanilla, Bronze, Black & Anodized
Mount: Inside or Outside
Maximum Width: 144"
See Price Grid 11 Page 44

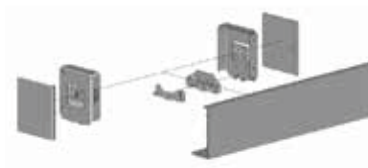


Skyline 3" Fascia

Roller Shade Valance Enclosure Options

3" & 4" Uncovered Square Aluminum Fascia Valance

The 3" & 4" Square Aluminum Fascia Valance is a "L" shaped aluminum extrusion that covers the front and bottom of the roller. The valance option locks to its brackets with snap-in fittings. The roller is concealed behind this valance and the bottom of the shade drops from the back of the valance when lowered.

Roll:	Available for regular roll only
Color:	White, Vanilla, Bronze, Black & Anodized
Mount:	Inside or Outside
Maximum Width:	144"
See Price Grid 11	
Page 44	

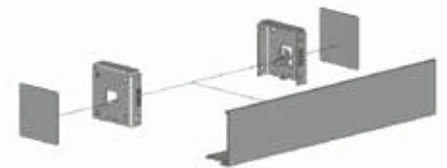

3" R Series Square Fascia




4" R Series Fascia

3", 4" & 5" Fabric Wrapped Square Fascia Valance

The 3" & 4" Fabric Wrapped Square Fascia Valance are the Square Aluminum Fascia Valances listed above, but include fabric matching the roller shade wrapped around the aluminum extrusion. This innovative upgrade option provides a warm look for any room. As described above with the Square Fascia Valance, this option covers the front and bottom of the roller and locks to its brackets with snap-in fittings. The roller is concealed behind this valance and the bottom of the shade drops from the back of the valance when lowered.


Roll:	Available for regular roll only Valance
Color:	fabric matches shade fabric
Mount:	inside or Outside
Maximum Width:	144"

See Price Grid 11
Page 44

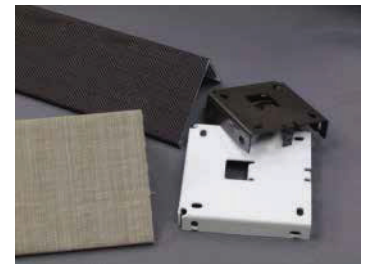

3" & 4" Fabric Wrapped Fascia

Universal 5" Fascia System

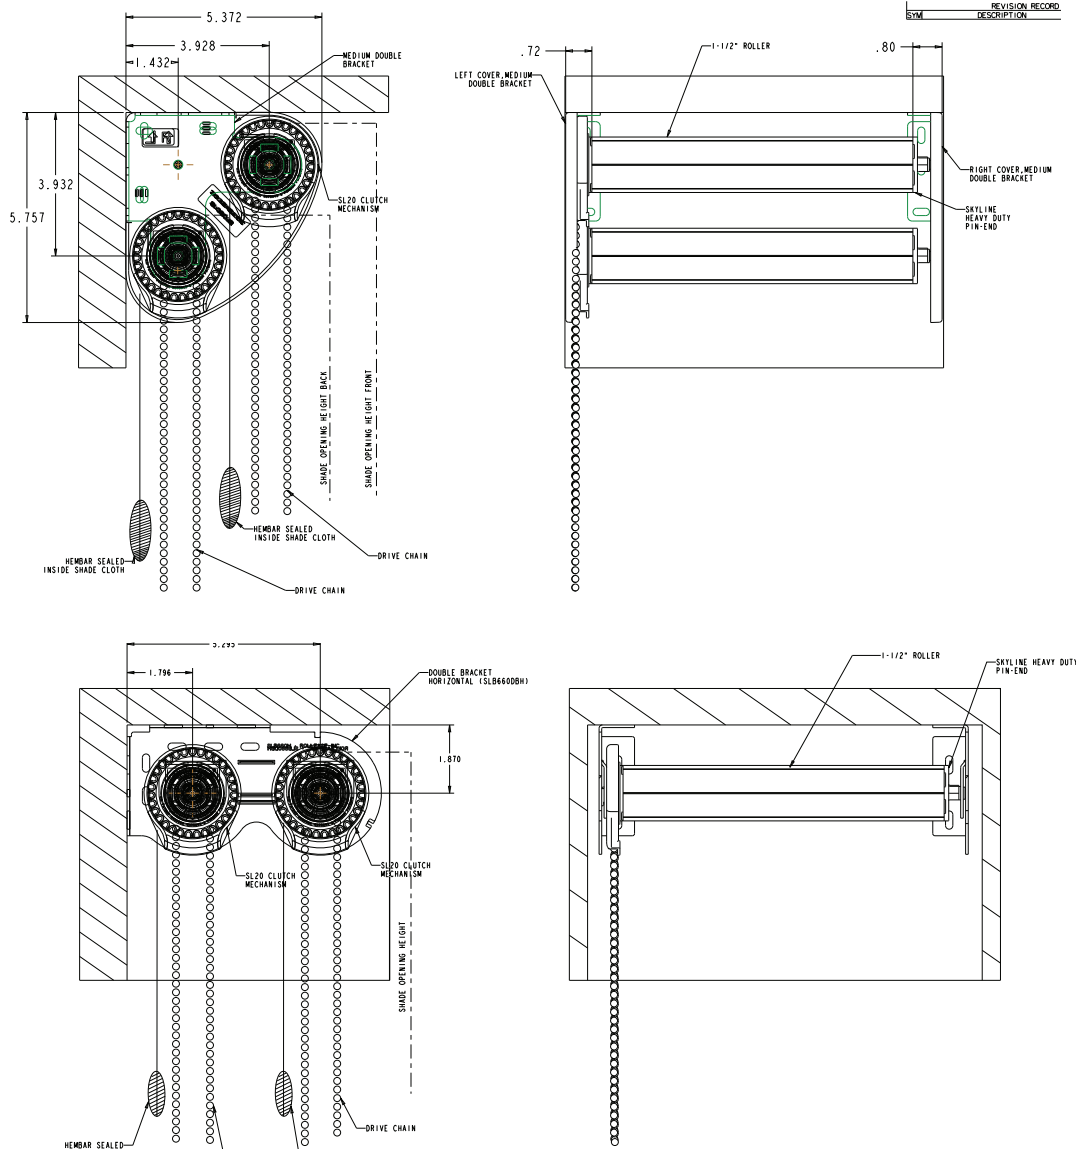


The modularity of the Universal 5" Fascia System offers a variety of different motorized or manual configurations. It also –


- Can be configured for a single large shade (4 3/4" diameter fabric roll) or dual shades (2 3/4" fabric roll),
- Eliminates notching of fascia using chain diverters and guides,
- Minimizes fascia light gap across the header as the top of the fascia is even with the top of the brackets,
- Accepts standard and reverse roll shades easily with reversible mounting fascia,
- Blocks light entering from behind the shades with optional mount of second length of fascia.

The Universal 5" Fascia System is available in white, anodized and bronze finishes and compliments the 3" and 4" Fascia and the Cassette 120. See Price Grid 11 Page 44

7" Square Fascia System

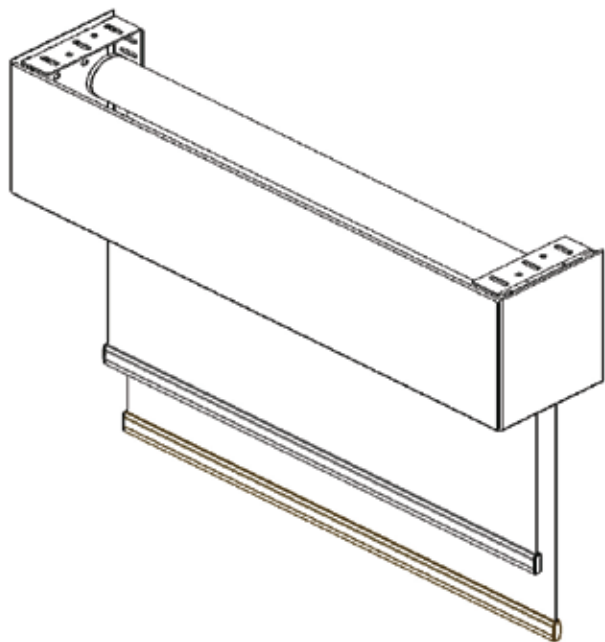


7" Square Fascia System with Somfy LT50 Motor

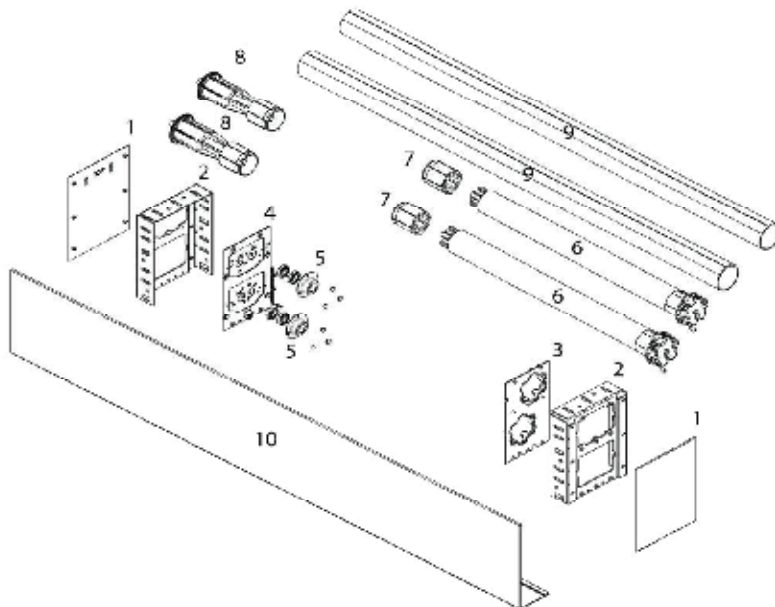

ZMC 7" Motorized Roller Shade

- SPECIFICALLY DESIGNED FOR ALL INDUSTRIAL AND COMMERCIAL APPLICATIONS THE 7" FASCIA SYSTEM PROVIDES A CLEAN AND MODERN APPEARANCE TO ANY LOCATION
- COMPATIBLE WITH SOMFY LT50 MOTOR ONLY AVAILABLE WITH INTERMEDIATE BRACKETS ALSO
- THE 7" DUO SHADE BRACKETS ALLOWS BOTH FILTERING AND ROOM DARKENING
- COMBINED WITH SIDE CHANNEL TO COMPLETELY ELIMINATE LIGHT PENETRATION WHEN CLOSED
- AVAILABLE IN WHITE, BRONZE & ANODIZED
- LENGTHS ARE 16 FEET

See Price Grid 11 Page 44

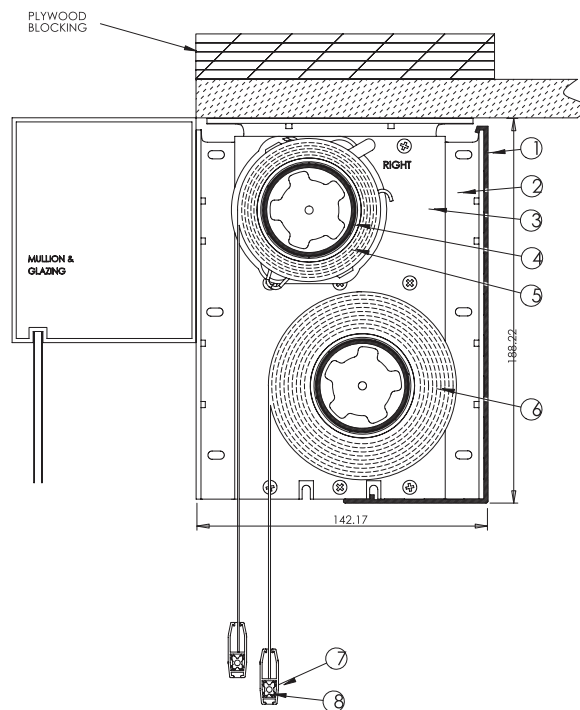

- NOTES:
1. 7" EXTRUDED ALUMINUM FASCIA
 2. 7" FASCIA BRACKET
 3. INSERT PLATE FOR MOTOR
 4. 2" EXTRUDED ALUMINUM MOTORIZED TUBE
 5. BLACKOUT FABRIC
 6. FABRIC: 3%, 5%, 10% OPENNESS
 7. EXTRUDED ALUMINUM SLIM BOTTOM BAR
 8. SLIM BOTTOM BAR END CAP




See Price Grid 11 Page 45

Cassette 100 & Cassette 120

Here at Porter Preston we offer one of the finest finishing options for Custom Roller Shades our Cassette 100 & 120 Systems. Here are some of the advantages for using these products:


- Three headrail sizes afford greater range of drop length possibilities and use of thicker fabrics
- Quick and easy installation
- Sleek look accommodates upscale commercial needs and affords greater residential appeal
- Sleek, curved design makes sunscreen fabrics more adaptable to residential use
- Intermediate bracket allows two shades in one headrail
- Available in five of the most popular colors: Anodized, White, Vanilla, Bronze & Black.

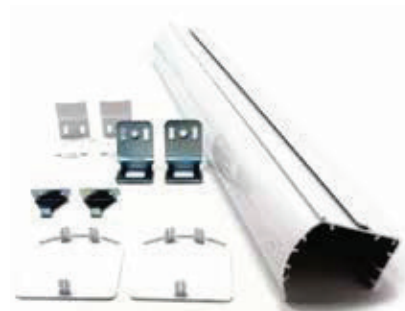


Cassette 100

Description	Systems Available	Compatible Clutches	Max Tube Diameter	Max Roll Diameter	Max Window Width	Colors Available	Mounting Brackets
Cassette 100	R-Series	R8, R16, RGAL RGALH 200	2 in (50.8mm)	2.5 in (63.5mm)	16 ft (4.88m)	Anodized, White, Vanilla, Bronze, Black	HDBKT2
Cassette 120	R-Series	R8, R16, RGAL RGALH 200	2 in (50.8mm)	2.870 in (72.90mm)	16 ft (4.88m)	Anodized, White, Vanilla, Bronze, Black	V2BKTXX



Cassette 100

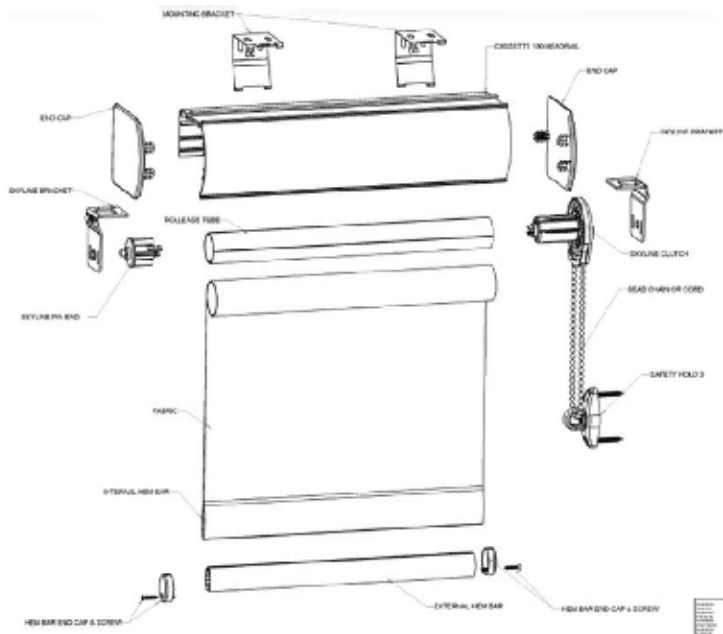



Cassette 120

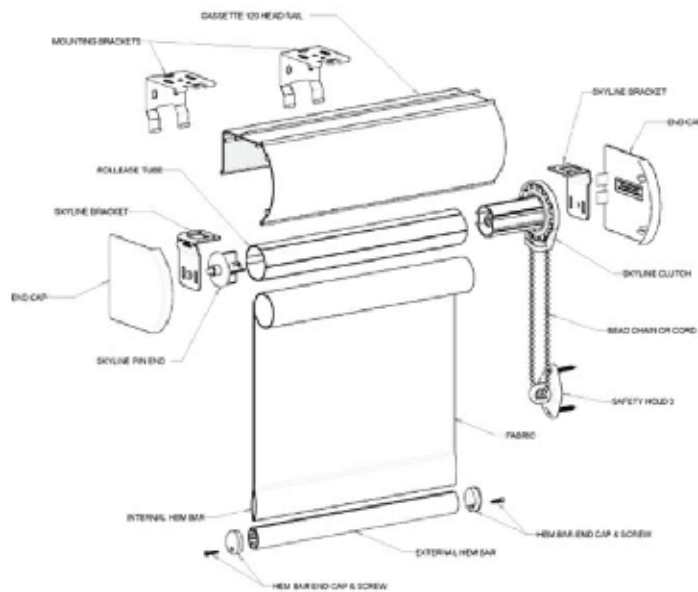

Headrail Cassette 100

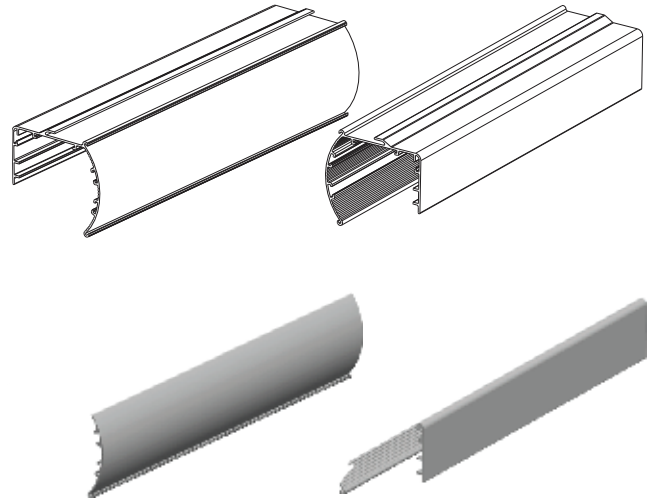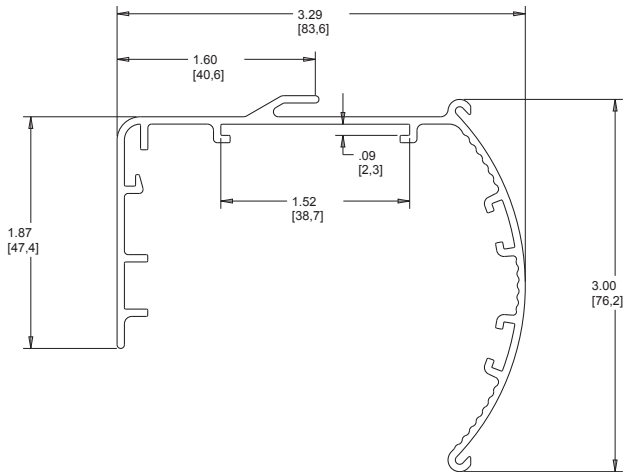

Headrail Cassette 120

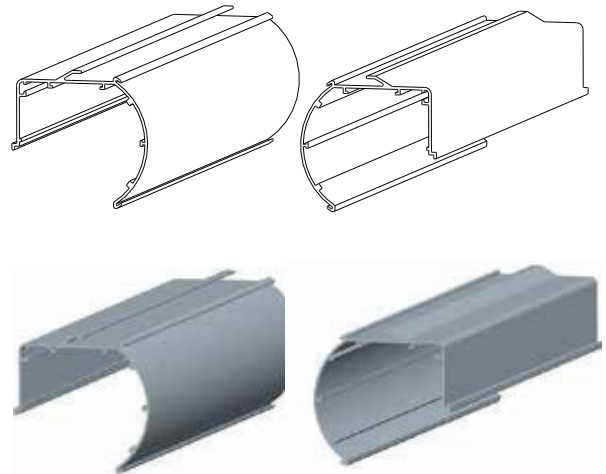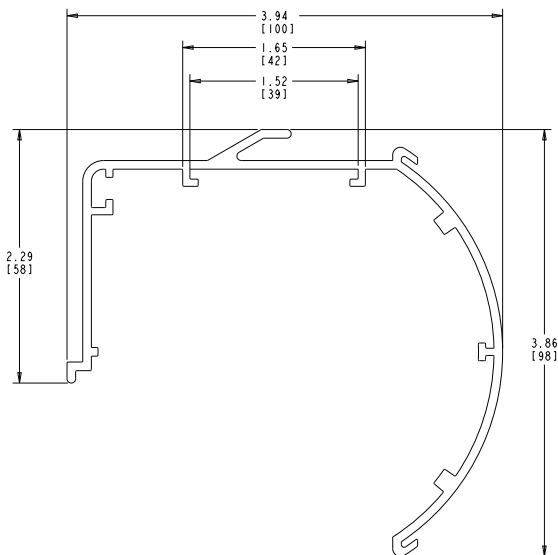

Lower Access Fascia / Flap & Hanger

The lower access fascia/flap & hanger is an aluminum extrusion that is installed at the bottom of a dry soffit to conceal the bottom of the roller shade. One should drill the mount strip wall hanger in the front of the dry wall soffit (pocket). **For Pricing See Price Grid 11 Page 45**

3" Lower Access Fascia / Flap and Hanger


Flap and Hanger provides a simple solution for concealing either a manual or motorized roller shade from viewers beneath the system. Flap and Hanger is a two-piece unit consisting of a "Hanger" which is mounted to the inside face of a gypsum pocket or soffit and a removable "Flap" which attaches to the hanger to provide a 3" return to conceal the shade mechanism.

Specifications

Material: 0.063" Extruded Aluminum

Color: White, Bronze and Anodized

Length: Available in custom lengths up to 150"

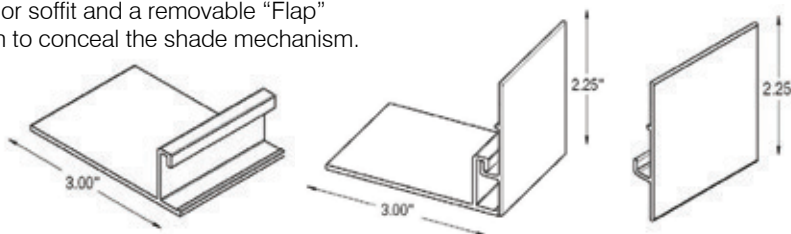

Roll: Available for regular roll and reverse roll shades


Color: White

Mount: Inside only


Minimum Width: 18"

Maximum Width: 240"

See Price Grid 11 Page 45



5" Lower Access Fascia / Flap and Hanger

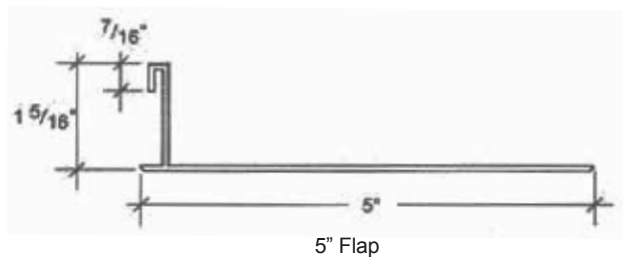

5" Flap

Roll: Available for regular roll & reverse roll shades

Color: White & Anodized

Mount: Inside or Outside

Minimum Width: 12"

Maximum Width: 192"

See Price Grid 11 Page 45

3", 4", 5", 6" Shade Box with Bottom Closure Plate



CONTRACT


Contract Series

QUICK REFERENCE SHEET

Widest variety of clutch options featuring award-winning and patented technology advancements that provide the smoothest and easiest pull forces in the industry.

- Aluminum Pockets in 4 sizes
- Bottom Closures and Black-out Side and Bottom Channels
- Multiple Tube and Bracket sizes
- Manual and Motorized options
- Quality design for fast, cost-effective and trouble-free installation

See Price Grid 11 Page 45

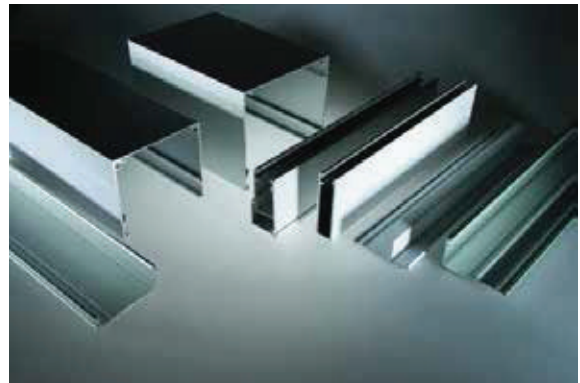

Item Description	Compatible Skyline Clutches	Compatible R-Series Clutches	Max Tube Diameter	Side Channels Available	Max Roll Diameter	Max Roll Diameter w/Bottom Closure	Max Window Width	Colors Available
3 Inch Pocket	N/A	R8, R16	2 in (50.8mm)	No	2.80 in (71.12mm)	2.4 in (60.96mm)	16 ft (4.88m)	Anodized, White
4 Inch Pocket	SL15, SL20, RGALH, SL30, RGAL400H	R16, R24	2 1/2 in (63.5mm)	Yes	3.75 in (95.25mm) 3.70 in (93.98mm)	3.4 in (86.36mm)	16 ft (4.88m)	Anodized, White
5 Inch Pocket	SL15, SL20, RGALH, SL30, RGAL400H	R16, R24, RGAL, RGAL400	3 1/4 in (82.6mm)	Yes	4.75 in (120.65mm)	4.75 in (120.65mm)	16 ft (4.88m)	Anodized, White
6 Inch Pocket	SL20, RGALH, SL30, RGAL400H	R16, R24, RGAL, RGAL400	3 1/4 in (82.6mm)	Yes	5.70 in (144.78mm)	5.5 in (139.7mm)	16 ft (4.88m)	Anodized, White

*For motor selections, see www.rollease.com/systems/roller-shades/motorized-solutions and click on Contract/Pocket Systems

Side Rails, Sill Channel & “Zip” Tracks

Side Rails & Sill Channels are aluminum extrusions used to eliminate light gaps at the left, right & bottom edges of the shade. Zip tracks are a great way to get the benefits of a side rail without any of the potential issues – can be used over open window – even outside.

Side Rails are used (primarily) for light control on the side and bottom of the shades. Side Rails are available in one width of 2 1/2” and have caps to finish top and bottom edges. Available in the following colors: White, Bronze, Black, Anodized and Vanilla.


See Price Grid 11 Page 45



Side Rail

Sill Channel is a more cost effective option used on the sill to control light bleed from the bottom of the shade.


See Price Grid 11 Page 45

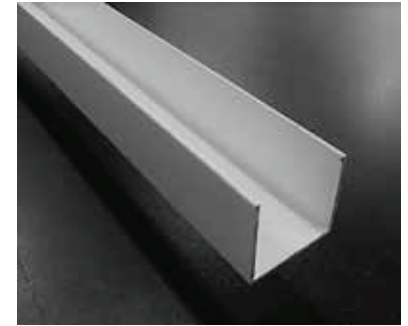

Sill Channel

ZIP Tracks are a fantastic way of getting all the benefits of a side rail and none of the draw backs. The vertical edge of the fabric has a “zipper” heat sealed to it that is retained by a special side rail extrusion so that the fabric will not only remain in the side rail but ☺ be held snugly in place. Available in white, off-white, gray, bronze & black. Custom colors are also available.

Please Call for a Quote

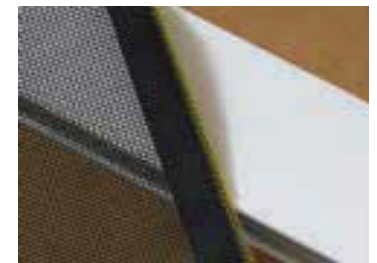

Zip Tracks

Lithium-Ion Rechargeable Battery RTS Motors by SOMFY:

Somfy Li-ion Wirefree Motor Types-Batteries are embedded within the tube!

See Price Grid 12 Page 46-47 for Pricing

			
Motor	Roll Up 28 Lithium-Ion/RTS	Sonesse 30 Lithium-Ion/RTS	Sonesse 30 ULTRA Li-Ion/RTS
Part #	1240291	1003128	1003310
Voltage	12V DC	12V DC	12V DC
Sound Level	~44dBa	~44dBa	~40dBa
Max. Lifting Weight / Tube Dia.	9.68 lb / 1.25" 8.07 lb / 1.5"	17.6 lb / 1.5" 13.2 lb / 2"	17.6 lb / 1.5" 13.2 lb / 2"
Speed	10-28 Adjustable RPM (Factory setting is 28RPM)	10-28 Adjustable RPM (Factory setting is 28RPM)	10-28 Adjustable RPM (Factory setting is 28RPM)
Minimum System Width	25 3/8" Width	26 1/4" Width	28" Width
Recommended Max Shade Size	84" W x 84" H	120" W x 120" H	120" W x 120" H
AC Charger-Recharger: Roll up 28 Lithium-Ion & Sonesse 30 Lithium-Ion ONLY Part #: 9020672 			AC Charger-Recharger: Sonesse 30 ULTRA Lithium-Ion ONLY Part #: 9025166 



RTS Transmitters for Lithium-Ion Motors by Somfy:

(these transmitters work with all Somfy RTS Motors)

See Price Grid 12 Page 46-47 for Pricing

Control	NEW Situo 1 1 Channel Remote	NEW Situo 5 5 Channel Remote	Telis 1 1 channel Remote	Telis 4 5 channel remote	Telis 16 16 channel remote	Decoflex Wallswitch 1-5 Channel
Part #	1800128	1800139	1810632 (Pure)	1810633 (Pure)	1811081 (Pure)	See MSRP
Image						

Control	Smooove RTS Wall Switch	Decoflex Tabletop Accessory	MyLink Smartphone and Tablet /Voice Interface. myLink also allows for integration with third-party control systems such as Control 4, Savant & Crestron
Part #	1811533 (Pure)	1811185 (White)*also available in black	1811403
Image			





Automation

Pristine roller shades can be operated by battery or hard wired solutions. Control options are many from wireless wall switches and remotes to home automation interfaces.

Porter Preston offers many different solutions for the automation of window treatments. The simplest and most popular solution is Somfy RTS (Radio Technology Somfy) and we have featured these motors and controls here.

We are happy to quote motorization solutions such as Somfy ILT, Lutron QED & QS and Electronic Solutions. We will design the system that is right for your project. Ask about Porter Preston's Project Management and Installation services. We can provide a "turn-key" solution for your automation project.

Battery Powered Motorized Roller Shades

Somfy R28 RTS-1240292

Porter Preston offers Somfy R28 RTS battery powered motors. They are radio (RTS) controlled and fit 1 ½" roller tube. Their maximum lifting capacity is 10 lbs. In general they can lift a 96" x 96" shade. Expected battery life is 1 – 2 years depending on frequency of use. Lithium batteries are supplied and recommended when replacements are due.

Advantages:

- No need for wiring
- In wall and handheld wireless controls
- Same controls work with other RTS hard wired shades
- Shades can be operated individually, groups and sub-groups
- Small size

Disadvantages:

- Size / weight limitations
- Motor noise – rather loud
- Battery powered – eventually the shades will cease to function and the batteries will have to be replaced
- Motor speeds often will not be the same

Minimum Width: w/o fascia 16" with fascia 17"

Maximum Width: 96"

Somfy R28 RTS battery motor


Includes:

Battery wand

Battery wand mounting clips

8 lithium AA batteries

See Price Grid 12 Page 46-47

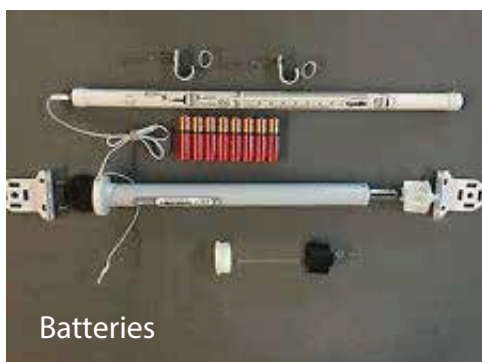

Somfy 12V DC Rechargeable Solar Battery Pack / Tube / Wand Kit Part # 9019235



Kit includes:

(1) Photovoltaic Solar Panel in Bezel with Glass mount adhesive strips,
(1) 10" Y-Harness, (1) Alcohol Wipe, (1) Instructions (10) #9018621 NiMH(Nickel Metal Hydride)
rechargeable batteries that fit in the reloadable battery tube.

- Used for powering Somfy LT30, CT32 and 2" Blind Tilt 12V Motors and Hunter Douglas 12 Volt PowerRise lift systems (see below).
- Low profile solar (photovoltaic) panel is compact, discreet and easy to conceal at just 1.57" tall x 11.85" Wide.
- Battery Tube / Wand 12" Y-Harness plugs directly into motor power port.
- Optional 24" or 48" Y-Harness available to extend reach of battery tube to motor.
- Replaces single (#9013741) and Dual (#9013742) throw away sealed battery wand.
- Battery Tube / Wand Dimensions: 20.625"L x 0.792D
- Warranty: 5-Years on Solar Panel, Wire Harness and Battery Holder. No warranty on NiMh Battery but has a life expectancy of 3-5 years.
- Somfy Cat. #9019235 includes (10)-NiNH batteries **MSRP:** See Price Grid 12 Page 46-47 for Pricing

The NEW Somfy Rechargeable Solar Battery Pack is a group of components that work in unison to provide a long life, renewable energy source for Somfy 12 Volt DC WireFree Motors. Patented energy saving technology uses sunlight to power WireFree Motorized window coverings by recharging the NiMH battery. Photovoltaics produce solar energy by converting solar radiation (sunlight) into direct electricity (DC) providing a Green alternative to regular batteries. The WireFree Solar Pack's PV panel is mounted on the inside of the window opening and converts the sun's light into electrical energy to power the window blind motor. The Solar Battery Pack is cost effective by reducing battery replacement and preserves the environment and provides a maintenance free solution that does not require an electrician. The Somfy Rechargeable Battery Pack is the ideal solution for hard to reach battery tube locations such as second story windows where battery replacement can be challenging.

Wired Motorized Roller Shades

See Price Grid 12 Pages 46-47

- **Somfy Sonesse ST-30 RTS (1001524)** 24 volt motor is a 2 nm (newton meter– a power rating) low voltage motor. It is best used on smaller shades as it can fit in a tube as small as 1.5". The motor is quiet – giving off only a small hum as it operates. As these motors operate off of 24 volts they do require a power supply to operate.

Minimum Width: 20" **Maximum Width:** 96"

Options: single motor power supply
5 motor power / distribution panel
10 motor power / distribution panel
panel dimensions: 12 1/4" x 12 1/4" x 5 1/2" high



Sonesse ST-30 RTS

- **Somfy Sonesse 40 RTS 404 S2 (1001636)** is a 4nm motor that runs on standard household line voltage. No power supply is necessary. An 11 1/2' cord is standard with the motor. Additional cord and plug is available at an additional cost.

Minimum Width: 23 1/2"

The Sonesse 40 series of motors are very quiet and deliver a lot of power in a 44mm or 2" tube size.



Sonesse ST-40 RTS

- **Somfy Sonesse 40 RTS 409 R2 (1001638)** is a 9nm motor that runs on standard household line voltage. No power supply is necessary. An 11 1/2' cord is standard with the motor. Additional cord and plug is available at an additional cost.

Minimum Width: 25"

The Sonesse 40 series of motors are very quiet and deliver a lot of power in a 44mm or 2" tube size.

For the Sonesse 40 RTS motors we can supply you with a grounded angle plug either loose or installed on the motor. If we install it on the motor for you we will cut the cord (11 1/2") to any length you specify. Note that this motor cable is NOT changeable so too long is always better than too short.

Angle Plug comes either loose or installed on motor

- **Somfy Sonesse 506 S2 RTS (1001809)** is a 6nm motor that runs on standard household line voltage. No power supply is necessary. See cord and plug options below.

Minimum Width: 31 1/2"

See Price Grid 12 Page 46-47



Radio Technology Somfy®



Sonesse 50 RTS w/o Plug



Sonesse 50 RTS 3' AC Cord with Plug

Wired Motorized Roller Shades

- **Altus 50 RTS** 525S2 (1043287) is for shades with great height or width, large banded shades and tensioned shades where more power is often needed. It is a 10nm motor that runs on standard household line voltage. No power supply is necessary. See cord and plug options below.

Minimum Width: 29"

See Price Grid 12 Page 46-47 for Pricing

These Sonesse 40, 50 and Altus 50 motors are also available in a standard **(4 wire) version**. Note that this motor will require a switch or external control.

RTS AC Cord Without Plug:

See Price Grid 12 Page 46-47 for Pricing

9203866	12' RTS Motor Cable WITHOUT Plug (LT-50)
9001537	18' RTS Motor Cable WITHOUT Plug (LT-50)
9001264	24' RTS Motor Cable WITHOUT Plug (LT-50)



110-volt AC Plug-in Motors simply plug directly into a standard electrical outlet

RTS AC Cord With Plug Installed on Motor:

See Price Grid 12 Page 46-47 for Pricing

9019952	3' RTS AC Cord With Plug Installed on Motor
9019953	6' RTS AC Cord With Plug Installed on Motor
9012145	12' RTS AC Cord With Plug Installed on Motor
9012151	18' RTS AC Cord With Plug Installed on Motor
9012146	24' RTS AC Cord With Plug Installed on Motor




24-volt DC Plug-in Motors require a power supply transformer that is wired to the motor cable and then plugs into an electrical outlet

Wired Motorized Roller Shades

Sonesse® ULTRA 50 AC -Part # 1002562

Ultra-quiet, ultra powerful, ultra flexible

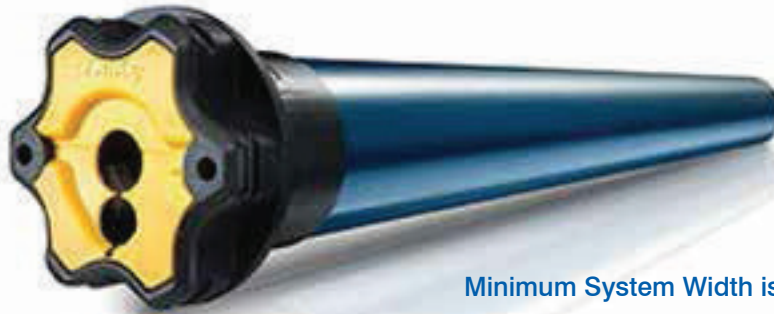

Minimum System Width is 39"

Description

Motorize a wide variety of window coverings to create the perfect environment and enjoy the peace and serenity provided by the Sonesse® ULTRA. It offers exceptional lifting capacity so you can enjoy powerful operation in a quiet and relaxing environment.

Benefits

Silent & Strong

Enjoy energy savings, privacy and glare reduction in a quiet atmosphere

- Perfect for areas where silence is critical such as nurseries, bedrooms and offices
- Our patented technology provides strong performance that allows for multi-banding
- of up to six shades

Comfort & Convenience

Continue your activities uninterrupted at home or work with the peaceful silent

- operation of motorized applications
- Compatible with multiple control technologies so you can operate motorized applications with ease

Energy Savings

Compatible with timers, sensors and the myLink™ app for automatic operation

Description

ULTRA Powerful

Its superior torque of up to 6Nm allows the motor to be installed for almost any application on the market. Additionally, the high torque allows for a single Sonesse ULTRA to multi-band up to six shades.

ULTRA Quiet

Sonesse ULTRA 50 AC is packed with innovations and patented technologies that provide 6Nm of power and an acoustic performance of less than 38dB- the most powerful and quietest motor on the market.

ULTRA Flexible

Available for a variety of control systems, for all types of spatial configurations in commercial and residential buildings, in both new and renovated projects.

See Price Grid 12 Pages 46-47



Radio Technology Somfy®

RTS Controls

Telis Handheld Remote Controls

Telis Remote controls come in 3 different channel configurations 1, 5, & 16.

They are available in 3 colors: Pure – White; Lounge – Black; Silver- Silver. There is also a weather resistant model – the Patio.

For MSRP See Price Grid 12 Pages 46-47

Telis 1 Pure	(1810632)	Telis 4 Silver	(1810641)
Telis 1 Patio	(1810643)	Telis 4 Lounge	(1810652)
Telis 1 Silver	(1810639)	Telis 16 Silver	(1811082)
Telis 1 Lounge	(1810650)	Situo 1 RTS	(1800128)
Telis 16 Pure	(1811081)	Situo 5 RTS Pure	(1800139)
Telis 1 Chronis Pure	(1805237)	Smooove 1 RTS Pure	(1811533)
Telis 4 Pure	(1810633)		
Telis 4 Patio	(1810645)		



Telis 1 Patio



Telis 4 Lounge



Telis 4 Pure



Telis 16 Pure

The Telis 6 Chronis RTS is a multi-channel (6) programmable timer that can also be used as a 6 channel hand held remote.



Situo RTS offers a sleek modern look, refined profile, ergonomic design with a discreet wall support

The Smooove RTS is a single channel, battery-operated wall switch for Radio Technology Somfy powered products. Its surface-mount design eliminates



the need to cut into drywall during installation. With seven decorative frame choices the Smooove is the perfect choice to match any decor.

Situo 1 RTS-Price Grid 12 Pages 46-47

Smooove 1 RTS Pure-Price Grid 12 Pages 46-47

For MSRP See Price Grid 12 Page 46-47

DecoFlex In Wall Wireless Remote Controls

Somfy's DecoFlex is a wireless RTS control with a decora cutout that mounts in the wall in a low voltage ring (included). It comes standard in either 1 or 5 channel configurations. 2, 3 & 4 channel face plates are available for an extra charge. Included with every DecoFlex are stickers for custom labeling every button. Printed buttons are available as well. DecoFlex is available in White, Ivory & Black.

See Price Grid 12 Pages 46-47

1810897	DecoFlex 1 White
1810898	DecoFlex 1 Ivory
1810830	DecoFlex 1 Black
1810813	DecoFlex 5 White
1810814	DecoFlex 5 Ivory
1810899	DecoFlex 5 Black



DecoFlex 1 White



DecoFlex 5 Ivory

2, 3 or 4 Channel DecoFlex Overlays Available

Custom Engraved Decoflex Command Buttons

Controls for Standard Motor

See Price Grid 12 Page 46-47

1800374	White Single Pole Double Throw (SPDT) Maintained Decora Switch
1800373	Ivory Single Pole Double Throw (SPDT) Maintained Decora Switch
1800375	White Double Pole Double Throw (DPDT) Maintained Decora Switch
1800376	Ivory Double Pole Double Throw (DPDT) Maintained Decora Switch
1810476	IGC 4n1 Motor Controller
1810627	Universal RTS Receiver for 110v Motors

Quick Disconnect Cable for Standard Motors loose or installed on motor

See Price Grid 12 Page 46-47

9012160	Anderson Power Plug Installed on Motor (male-white)12"
9012161	Anderson Power Plug Installed on J-Box side (female black 60"

Somfy Universal RTS Interface

See Price Grid 12 Page 46-47

Somfy's Universal RTS 16 Channel Interface can convert commands from IR, RS232, RS485 to RTS commands

1810872	Somfy Universal RTS Interface
---------	-------------------------------



Somfy Universal RTS Interface

DecoFlex RTS Table Top Accessory- See Price Grid 12 Page 46-47

1811185	DecoFlex Table Top Black
1811051	DecoFlex Table Top White



DecoFlex Table Top Black



RTS Repeater

RTS Repeater - extend the range of your RTS controls up to 60'

1810791	RTS Repeater	See Price Grid 12 Page 46-47
---------	--------------	------------------------------

RTS Sun Sensor

9013707	Sunis Indoor Wirefree RTS Sun Sensor	Price Grid 12 Page 46-47
---------	--------------------------------------	--------------------------




Sun Sensor

myLink™ RTS

Smartphone and Tablet Interface

See Price Grid 12 Pages 46-47



OVERVIEW:

The myLink™ RTS Smartphone and Tablet Interface is a WiFi to Radio Technology Somfy® (RTS) bridge that can control up to 16 channels of RTS motorized products using the Somfy myLink apps for iOS and Android devices. Through the app, users can send immediate RTS commands, create scenes (a group of motorized products working together) and schedules (timed events). Users may access their myLinks from anywhere with the app's remote access feature. Though the myLink is a single-zone controller, multiple myLinks can be joined within the same system for multi-zone control. The myLink can also be used as a WiFi to RTS interface for integration with third-party control systems and is compatible with the Somfy Synergy™ API and Amazon Alexa.



For information about the original myLink (Legacy version), see Legacy spec sheet. Legacy myLinks are identified with the status LED and setup button on the right side of the unit, and device IDs beginning with "AAAA" (EX: AAAA1234).



TECHNICAL SPECIFICATIONS:

- 120V AC; 50-60Hz
- Ultra Low Power Wi-Fi (802.11 a/b/g/n)
- 3.64" L x 2.35" W x 1.95" H
- Radio Frequency:
 - RTS 433.42 MHz
 - Wi-Fi: 2.4 & 5GHz
- iOS Version: 7 and higher
- Android Version: Jelly Bean and higher
- FCC ID: DWNMYLINK
- Operating Temp: 41°F to 113°F (5°C to 45°C)
- Rated Current (Amps): 10 to 50 milliamps
- Insulation Class: Class II
- For Indoor Use Only
- Enclosure:
 - PE
 - UL94V-0 flame rating
 - RoHS compliant
- Shipping Weight: 1lb


FEATURES SUMMARY:

- Control for up to 16 RTS channels per myLink™ from iOS and Android devices
- Join up to 10 myLinks together for multi-zone control
- Manually activate RTS products
- Automate window coverings with scenes and schedules
- Supports Up/Down/My/Stop commands and incremental control (tilt/brightness)
- Multiple users
- Remote access
- Integration with third-party systems over IP
- Compatible with Somfy Synergy
- Compatible with Amazon Alexa

WHAT'S IN THE BOX:

- myLink™
- Quick Start Guide


CONNECTIONS AND INDICATORS:

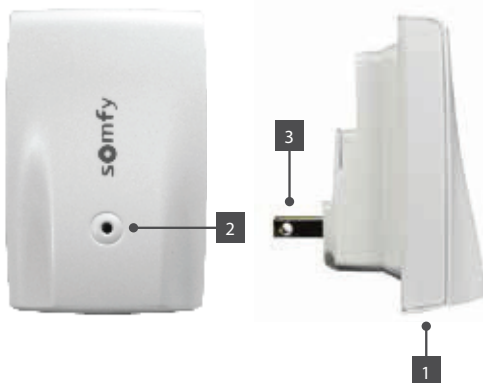

ELEMENT	FUNCTION
1 Setup Button	Engages setup mode
2 Status LED	Solid Red: Setup mode. The myLink is ready to accept WiFi network information or have its PIN changed. This is the mode the myLink should be in out of the box. Solid Green: myLink is successfully connected to a WiFi network Slow Blinking Green: myLink is trying to connect to a WiFi network/is disconnected from its known WiFi network Single Orange Blink: myLink is sending RTS commands Solid Orange: Firmware update mode Slow Blinking Red: myLink is scanning both 2.4GHz and 5GHz bands for nearby WiFi networks
3 AC Prongs	AC prongs

DIMENSIONS:

Item #: 1811403-See Price Grid 12 Pages 46-47

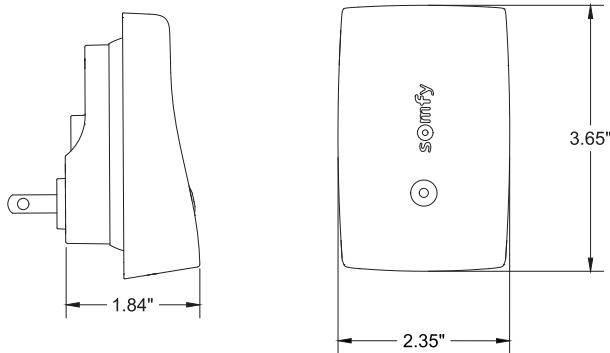

BEST WIRING PRACTICES

Before installing the myLink, make sure that the RTS system is fully operational with all motor limits set and a programmed RTS transmitter. Plan to install one myLink per zone. Actual specification and RF range will vary depending on number of RTS channels and environmental conditions (building materials, RF interference, etc.).

The diagram shown below is meant for illustrative purposes to show the connections from product to product. This device could be used in other configurations than shown below.



Automated Window Treatments Are Better Than Ever!

Tubular motors with built in Lithium-ion rechargeable batteries!

Porter Preston expands our Pristine Roller Shade and Workroom offerings to include the **Automate™ Radio Communication (ARC™)** motorization program by Rollease Acmeda:




- ✓ Built in rechargeable Lithium-ion batteries
- ✓ Easy to install-no electrician required
- ✓ Perfect upgrade from manual shades-no hardwiring
- ✓ Leveling control can achieve precise positioning of multiple shades
- ✓ Simple limit setting and adjustment
- ✓ Over 500 up/down full cycles Per charge (based on 13oz psy fabric for roller shade at recommended max shade size)

- ✓ Easy Programming in 5 Simple Steps with Remote or Smart Phone App
- ✓ Shades can be controlled via remote, smart phone app, internal sunlight sensor & switches
- ✓ Favorite Position
- ✓ 2 way RF communication. Shade positioning and battery health are relayed via smart phone app. A notification will prompt when motor requires charging
- ✓ Optional solar powered charger
- ✓ 3 operational speed settings available
- ✓ Features proprietary ARC™ protocol = less RF Interference & better battery life

Automate™ Radio Communication (ARC™) Motors by Rollease Acmeda:

Automate Li-ion Wirefree Motor Types

See Price Grid 14 Page 51

						
Motor	Li-ion 0.2	Li-ion 1.1	Li-ion Q2.0	Li-ion 3.0	Li-ion Q3.0	Li-ion Q10
Part #	MTDCBRF18-0.2	MTDCBRF25-1.1	MTDCBRFQ28-2	MTDCBRF35-3	MTDCBRFQ45-3	MTDCBRF45-10
Voltage	12	12	12	12	12	12
Sound Level	~48DB	~46DB	~44DB	~53DB	~40DB	~42DB
Max. Lifting Weight / Tube Dia.	3.1lb / 1.125"	13lb / 1.5"	17lb / 2"	26lb / 2"	21lb / 2.5"	55lb / 3.25"
Speed	80 rpm (adj to 60/40)	40 rpm (adj to 30/20)	28 rpm (adj to 24/20)	28 rpm (adj to 24/20)	28 rpm (adj to 24/20)	9 rpm (adj to 8/6)
Minimum System Width	21 5/8"	23 7/8"	21 1/2"	37 1/2"	37 7/8"	37 7/8"
Recommended Max Shade Size	48"x60"	84"x84"	120"x120"	120"x120"	144"x144"	168"x168"
AC Charger-Recharger for DC Battery Motors *priced separately from motor		 Electronic Limit Switch  Battery Powered  Favourite Position  Level Control  433MHz Bi-directional  Adjustable Speed  Solar Panel  AC Charger				

Automate™ Radio Communication (ARC™) Motors by Rollease Acmeda:

Automate Li-ion Wirefree Motor Types

See Price Grid 14 Page 51

Control	1 channel Remote	15 channel remote	5 channel wall switch (surface mount)	1 Channel wall switch (cut in)	2 Channel wall switch (cut in)	15 Channel wall switch (cut in)	*NEW* Automate Push 5 Remote
Part #	MTRF-REM-1C	MTRF-REM-15	MTRF-SW5-FLUSH	MTRF-WS-1C	MTRF-WS-2C	MTRF-WS-15	White: MT02-0101-067004 Black: MT02-0101-050004
Image							

Control	*NEW* Automate Pulse 2 Available 10/30/19	Sun Sensor	Solar Panel
Part #	MT02-0401-067001	MTRF-SUNSENS	MTSOLPAN-B
Image			

Roller Shade Material Pristine Roller Shades are available in many colors, textures and privacy options from the top manufacturers in the world. In addition we will also use Customer's Own Material (COM) to meet the needs of our customers that require color and/or pattern coordination. Contact Customer Service for Pricing.

Pristine Roller Shade Material tend to fall into three categories: Solar Screens, decorative Transluents & Blackouts. Within these three categories the fabrics range from functional to decorative and everything in between.

Solar Screens

These are Mesh fabrics designed to control natural light.

Available in many "openness factors" i.e. 1%, 3%, 5%, 10%, etc. Openness Factor affects comfort, the degree of visibility and glare control.


Protects interiors and furnishings from the damaging rays of the sun.

Reduces glare for televisions and computer screens.

Preserves the view to the outside. *Note that this view is from the relative dark side to the relative bright side so at night a lit room will be visible from the outside.*

Provides a decorative aspect – especially with the latest in Solar Screen designs.

Caution!! Some Solar Screen fabrics installed on windows with existing insect screens can cause a "Moiré Effect" which could be objectionable to the end user. It is always best to test for this with a fabric sample BEFORE ordering the shades. If it is winter be sure to ask as sometimes the insect screens are removed for the winter.

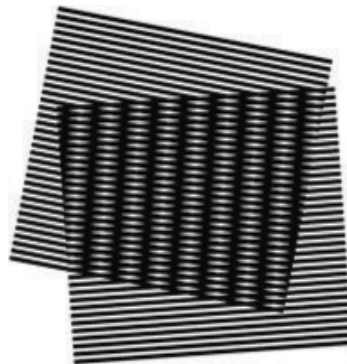

"Moiré Effect"

Transluents

These fabrics let in some light but none of the view affording a nice warm glow in the daytime and privacy anytime.

Pristine has Translucent fabrics that have a matching Blackout counterpart.

Blackouts


As the name implies these fabrics will not allow any direct light to pass through. There is no openness in the fabric, however some portions of the fabric composition are translucent enough that you may see a "glow" behind the shade, particularly if the window is facing east or west. No UV rays come through the fabric and there is complete privacy. The "glow" varies by product. See the chart on page 21 for specific comparisons.

Pristine has Blackout fabrics that have a matching Translucent counterpart.

Caution: While a Blackout shade does not allow any light to pass through the fabric, light can and will bleed around the sides, top & bottom of the shade. Pristine offers valances, side rails and sill rails to eliminate all light from the window.

The Glow Effect

% darkening vs glow

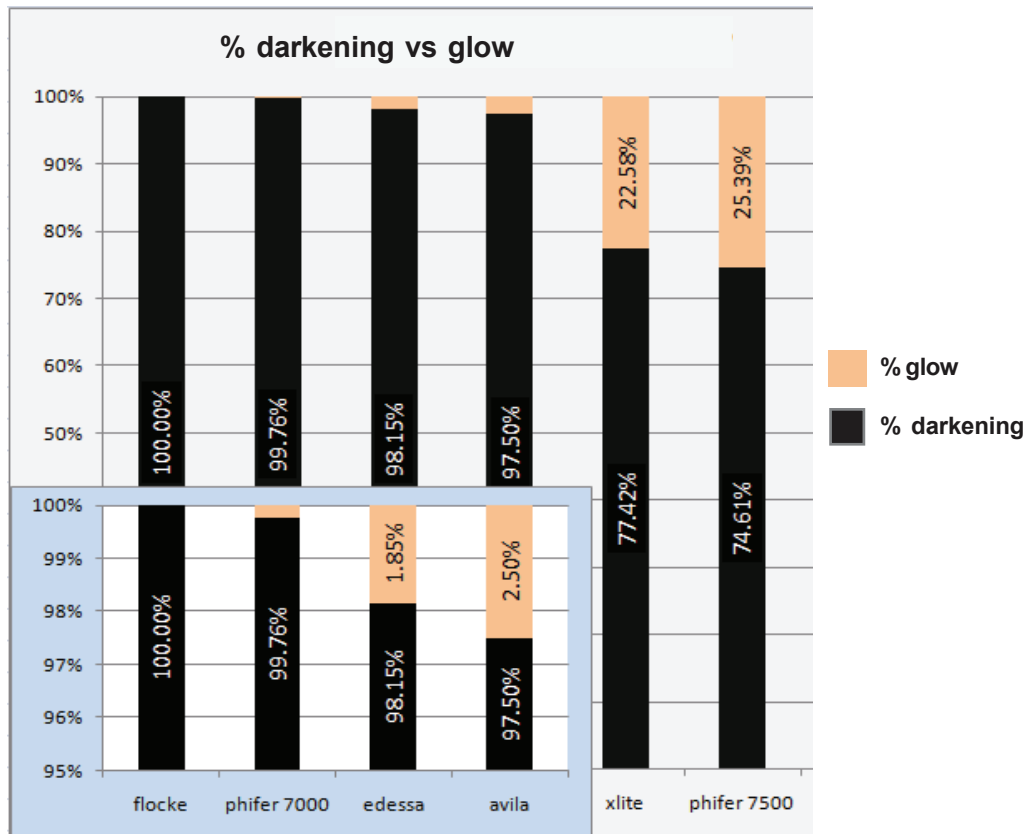

This is a magnification of the top 5% of the chart

Shade Roll-Up Diameters

Fabric thickness will vary. The table below is based on a fabric with a thickness of .020 inches

Drop			Tube Outside Diameter					Inches
			1.25	1.50	2.00	2.50	3.25	
cm	Inches	Feet	32	38	50	63	83	mm
30	12	1	1.37	1.60	2.07	2.56	3.30	Shade Diameter Fully Raised
61	24	2	1.47	1.69	2.15	2.62	3.34	
91	36	3	1.57	1.78	2.22	2.68	3.39	
122	48	4	1.67	1.86	2.29	2.73	3.43	
152	60	5	1.76	1.94	2.35	2.79	3.48	
183	72	6	1.84	2.02	2.42	2.84	3.52	
213	84	7	1.92	2.10	2.48	2.90	3.56	
244	96	8	2.00	2.17	2.54	2.95	3.61	
274	108	9	2.08	2.24	2.60	3.00	3.65	
305	120	10	2.15	2.30	2.66	3.05	3.69	
335	132	11	2.22	2.37	2.71	3.10	3.73	
366	144	12	2.29	2.43	2.77	3.15	3.77	
396	156	13	2.35	2.49	2.82	3.20	3.81	
427	168	14	2.42	2.56	2.88	3.24	3.85	

Fascia System Largest Allowable Shade Diameter

	Inches
Cassette 100	1.95
Cassette 120	2.25
R-Series Fascia, 3"	2.75
SL Fascia, 3'	2.75
Contract Pocket, 3"	2.75
R-Series Fascia, 4"	3.75
SL Fascia, 4"	3.75
Contract Pocket, 4"	3.75
Contract Pocket, 5"	4.75
Contract Pocket, 6"	5.75

Roller Shade Fabrication Chart for RollEase R- Series

Length	Width										
	36	42	48	54	60	66	72	84	98	108	120
36											
48											
60											
72											
84											
96											
108											
120											
132											
144											
156											
168											
180											
192											

Clutch	Tube
R8	1 1/4"
R16	1 1/2"
R24	1 1/2"
R16	2"
R24	2"
Galaxy Clutch	
Spring Assist	
Motor	

Roller Shade Fabrication Chart for RollEase Skyline

Length	Width										
	36	42	48	54	60	66	72	84	98	108	120
36											
48											
60											
72											
84											
96											
108											
120											
132											
144											
156											
168											
180											
192											

Clutch	Tube
S10	1 1/4"
S15	1 1/4"
S15	1 1/2"
S20	1 1/2"
S15	2"
S20	2"
Galaxy Clutch	
Spring Assist	
Motor	

PRISTINE FABRIC SPECIFICATIONS

Fabric	Price Grid	Openness %	Max Fabric Width	Railroadable	Fabric Covered Valance	Weight oz/sq yd	Thickness	Fire Rated	Green Guard Gold	Fungal Resistance
9803 3%	5	3%	98"	Y	Y	11.60	0.025	Y	Y	Y
3000 Net 1%	3	1%	118"	Y	Y	15.28	0.026	Y	Y	Y
3000 Net 3%	2	3%	118"	Y	Y	13.12	0.022	Y	Y	Y
3000 Net 5%	2	5%	118"	Y	Y	12.39	0.022	Y	Y	Y
3000 Net 10%	2	10%	118"	Y	Y	11.36	0.020	Y	Y	Y
3000 Net Privacy	3	0%	118"	Y	Y	15.28	0.026	Y	Y	Y
4000 Net 3%	3	3%	118"	Y	Y	16.07	0.029	Y	Y	Y
4000 Net 5%	3	5%	118"	Y	Y	15.34	0.027	Y	Y	Y
Avila Daylight Residential <1%	3	LF	118"	Y	Y	6.20	0.012	N	Y	Y
Avila Twilight Residential BO	5	BO	118"	Y	Y	12.24	0.018	N	Y	Y
Balmoral LF	5	LF	118"	Y	Y	6.49	0.021	N	Y	N
Balmoral BO	7	BO	118"	Y	Y	11.500	0.023	N	Y	N
Century/Opaque BO	1	BO	72"	Y	Y	12.00	0.013	Y	Y	Y
Duplex BO	1	BO	72"	Y	Y	12.50	0.013	Y	Y	Y
E Screen 1%	6	1%	122"	Y	N	13.30	0.020	Y	Y	Y
E Screen 3%	5	3%	122"	Y	N	11.60	0.017	Y	Y	Y
E Screen 5%	4	5%	122"	Y	N	10.70	0.016	Y	Y	Y
E Screen 10%	4	10%	122"	Y	N	10.30	0.020	Y	Y	Y
E Screen Chroma 3%	10	3%	94.5"	Y	N	11.92	0.020	Y	Y	Y
E Screen Deco 1%	6	1%	122"	Y	N	12.30	0.022	Y	Y	Y
E Screen Deco 3%	6	3%	122"	Y	N	11.50	0.019	Y	Y	Y
E Screen KOOL BLACK 1%	10	1%	98"	Y	N	12.95	0.021	Y	Y	Y
E Screen KOOL BLACK 3%	9	3%	98"	Y	N	11.30	0.020	Y	Y	Y
E Screen KOOL BLACK 5%	8	5%	98"	Y	N	10.60	0.019	Y	Y	Y
Flocke BO	10	BO	94.5"	Y	Y	15.93	0.020	Y	N	Y
GreenScreen Evolve 3%	5	3%	118"	N	N	8.85	0.029	Y	Y	Y
GreenScreen NATURE 5%	9	5%	94.5"	Y	N	5.10	0.010	Y	Y	Y
Green Screen REVIVE 1%	6	1%	118"	N	N	5.87	0.019	Y	Y	Y
GreenScreen REVIVE 5%	6	5%	118"	Y	N	5.01	0.017	Y	Y	Y
Laminates	10									
Linen Glass RD	1	RD	72"	Y	Y	12.00	0.016	Y	Y	Y
M Screen 1%	5	1%	122"	Y	N	13.12	0.022	Y	Y	Y
M Screen 3%	5	3%	122"	Y	N	12.70	0.022	Y	Y	Y
M Screen 5%	4	5%	122"	Y	N	11.30	0.022	Y	Y	Y
M Screen Deco 3%	5	3%	98"	Y	N	12.21	0.023	Y	Y	Y
M Screen Deco 5%	5	5%	98"	Y	N	11.30	0.020	Y	Y	Y
Mesa LF	4	LF	118"	Y	Y	6.93	0.019	Y	Y	N
Mesa BO	6	BO	118"	Y	Y	12.68	0.022	Y	Y	N
Moire RD	1	RD	72"	Y	Y	12.00	0.014	Y	Y	Y
Natte 3%	8	3%	122"	Y	Y	16.40	0.023	Y	Y	Y
Natte 5%	8	5%	122"	Y	Y	14.13	0.022	Y	Y	Y
Natte 10%	6	10%	122"	Y	Y	13.48	0.021	Y	Y	Y
NoLite	1	RD	72"	Y	Y	14.00	0.014	Y	Y	Y
S Screen 1%	6	1%	122"	N	N	19.10	0.041	Y	Y	Y
S Screen 4%	6	4%	122"	N	N	18.90	0.037	Y	Y	Y
S Screen Naturals 5%	5	5%	98"	N	N	15.00	0.042	Y	Y	Y
Satine 1%	9	1%	122"	Y	Y	17.80	0.033	Y	Y	Y
Satine 5%	8	5%	122"	Y	Y	15.40	0.032	Y	Y	Y
Sheerweave 1000 25%	2	25%	96"	N	Y	8.80	0.020	Y	Y	Y
Sheerweave 2000 5%	4	5%	126"	Y	Y	14.40	0.021	Y	Y	Y
Sheerweave 2100 10%	3	10%	98"	Y	Y	12.90	0.021	Y	Y	Y
Sheerweave 2360 10%	3	10%	126"	Y	Y	10.40	0.019	Y	Y	Y
Sheerweave 2390 5%	4	5%	126"	Y	Y	11.80	0.017	Y	Y	Y
Sheerweave 2390 Performance Plus 5%	8	5%	96"	Y	N	11.80	0.018	Y	Y	Y
Sheerweave 2410 3%	4	3%	126"	Y	Y	14.10	0.020	Y	Y	Y
Sheerweave 2410 Performance Plus 3%	9	3%	96"	Y	N	14.10	0.019	Y	Y	Y
Sheerweave 2500 1%	5	1%	126"	Y	Y	16.20	0.024	Y	Y	Y

FABRIC SPECIFICATIONS

Fabric	Price Grid	Openness %	Max Fabric Width	Railroadable	Fabric Covered Valance	Weight oz/sq yd	Thickness	Fire Rated	Green Guard Gold	Fungal Resistance
Sheerweave 2500 Performance Plus 1%	9	1%	96"	Y	N	16.39	0.024	Y	Y	Y
Sheerweave 2701 1%	5	1%	126"	Y	Y	14.60	0.027	Y	Y	Y
Sheerweave 2703 3%	4	3%	126"	Y	Y	14.00	0.028	Y	Y	Y
Sheerweave 2705 5%	4	5%	126"	Y	Y	11.80	0.025	Y	Y	Y
Sheerweave 2710 10%	3	10%	98"	Y	Y	10.40	0.023	Y	Y	Y
Sheerweave 3000 14%	3	14%	96"	Y	Y	13.46	0.028	Y	Y	Y
Sheerweave 4000 Eco 5%	4	5%	126"	Y	Y	18.00	0.032	Y	Y	Y
Sheerweave 4100 Eco 10%	3	10%	98"	Y	Y	16.70	0.032	Y	Y	Y
Sheerweave 4400 Eco 3%	4	3%	126"	Y	Y	19.90	0.034	Y	Y	Y
Sheerweave 4500 5%	4	5%	126"	Y	Y	14.40	0.024	Y	Y	Y
Sheerweave 4550 5%	4	5%	98"	Y	Y	13.00	0.025	Y	Y	Y
Sheerweave 4600 3%	5	3%	126"	Y	Y	17.40	0.030	Y	Y	Y
Sheerweave 4650 3%	5	3%	98"	Y	Y	13.30	0.026	Y	Y	Y
Sheerweave 4800 1%	5	1%	126"	Y	Y	18.50	0.036	Y	Y	Y
Sheerweave 4901 1%	5	1%	98"	Y	Y	15.85	0.028	Y	Y	Y
Sheerweave 4903 3%	4	3%	98"	Y	Y	14.90	0.027	Y	Y	Y
Sheerweave 5000 1,3,5,7,10%	5	1, 3, 5, 7, 10	98"	N	Y	12.3-16.1	.032-.052	Y	Y	Y
Sheerweave 7000 BO	8	BO	118"	Y	Y	12.40	0.029	Y	Y	Y
Sheerweave 7100 BO	5	BO	96"	Y	Y	21.60	0.025	Y	Y	Y
Sheerweave 7200R BO	5	BO	118"	N	Y	11.06	0.024	Y	Y	Y
Sheerweave 7250R LF	4	LF	118"	N	Y	6.19	0.018	Y	Y	Y
Sheerweave 7400 BO	7	BO	118"	N	Y	12.53	0.029	Y	Y	Y
Sheerweave 7450 LF	4	LF	118"	N	Y	6.54	0.026	Y	Y	Y
Sheerweave 7500 BO	5	BO	118"	Y	Y	12.14	0.016	Y	Y	Y
Sheerweave 7600 BO	6	BO	118"	N	Y	11.80	0.021	Y	Y	Y
Sheerweave 7650 LF	4	LF	118"	N	Y	6.20	0.017	Y	Y	Y
Sheerweave 7700R BO	5	BO	118"	N	Y	13.60	0.028	Y	Y	Y
Sheerweave 7750R LF	4	LF	118"	N	Y	8.80	0.023	Y	Y	Y
Sheerweave 7800 BO	6	BO	118"	Y	Y	12.90	0.026	Y	Y	Y
Sheerweave 7850 LF	5	LF	118"	Y	Y	7.40	0.027	Y	Y	Y
Sheerweave 8000 3% PVC Free	6	3%	118"	Y	Y	7.35	0.019	Y	Y	Y
Sheerweave Basic 3%	3	3%	98"	Y	Y	16.40	0.025	Y	Y	Y
Sheerweave Basic 5%	3	5%	98"	Y	Y	14.10	0.022	Y	Y	Y
Sheerweave Infinity2 1%	8	1%	98"	N	Y	13.90	0.032	Y	Y	Y
Sheerweave Infinity2 3%	7	3%	98"	N	Y	13.69	0.031	Y	Y	Y
Sheerweave Infinity2 5%	7	5%	98"	N	Y	12.82	0.030	Y	Y	Y
T Screen 1%	6	1%	122"	Y	Y	13.83	0.028	Y	Y	Y
T Screen 3%	5	3%	122"	Y	Y	12.59	0.027	Y	Y	Y
T Screen Deco 1%	7	1%	122"	Y	Y	13.76	0.028	Y	Y	Y
T Screen Deco 3%	6	3%	122"	Y	Y	12.98	0.028	Y	Y	Y
T Screen Deco 5%	6	5%	122"	N	Y	11.89	0.028	Y	Y	Y
T Screen KOOL BLACK 1%	8	1%	122"	Y	Y	13.54	0.024	Y	Y	Y
T Screen KOOL BLACK 3%	8	3%	122"	Y	Y	13.27	0.029	Y	Y	Y
TFR/Cotton EI	1	LF	72"	N	Y	6.40	0.009	Y	Y	Y
Translucent Plus	1	0%	72"	Y	Y	9.60	0.013	Y	Y	Y
Verona Daylight <1%	5	<1%	118"	N	Y	5.90	0.021	Y	Y	Y
Verona Twilight 0%	7	0%	118"	N	Y	11.65	0.024	Y	Y	Y
Vizela	8	LF	94.5"	Y	Y	8.70	0.013	Y	Y	Y
Wide Shade BO	4	BO	120"	Y	Y	17.90	0.017	Y	Y	Y

PRICE GRID 1 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
Century/Opaque	36"	105	119	125	140	146	160	166	187	245	279	334	389	444	498	552
Duplex BO	48"	118	133	141	156	163	179	188	211	273	310	370	428	487	547	605
Linen Glass RD	60"	130	147	156	174	183	200	209	235	300	342	405	468	531	595	658
Moire RD	72"	142	160	172	190	201	219	231	297	328	372	441	507	575	642	708
NoLite	84"	154	175	187	208	219	240	289	323	355	404	475	547	618	691	761
TFR/Cotton EI	96"	166	188	202	222	273	296	310	347	384	448	521	595	668	740	814
Translucent Plus	108"	178	201	217	240	293	316	331	371	411	480	557	635	712	790	867
	120"	190	216	233	294	310	336	353	396	439	509	592	673	756	837	919
	132"	202	230	283	309	329	355	374	433	481	541	627	714	799	886	971
	144"	215	242	297	327	347	375	396	459	508	571	662	752	843	933	1024
	156"	227	292	312	343	365	395	417	484	537	603	697	792	887	980	1075
	168"	239	305	329	361	384	416	439	508	564	634	733	831	931	1029	1128
	180"	251	319	343	376	402	435	461	532	592	663	766	871	974	1077	1180
	192"	264	332	359	394	421	455	482	558	618	695	801	910	1018	1124	1232

● Width (Inches)

● Height (Inches)

PRICE GRID 2 MSRP

FABRICS

WINDOW OPENING

		36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
3000 Net 3%	36"	123	141	149	163	173	188	195	219	289	330	394	460	524	587	653
3000 Net 5%	48"	139	156	166	184	193	212	220	249	322	366	436	506	575	645	715
3000 Net 10%	60"	153	174	184	205	215	235	246	277	354	403	479	552	627	702	777
Sheerweave 1000 25%	72"	168	189	202	224	237	259	272	351	387	439	519	600	679	758	838
	84"	182	206	219	244	259	283	341	381	420	477	560	645	730	815	900
	96"	195	221	238	264	323	350	366	408	452	528	615	702	789	876	963
	108"	210	238	255	284	344	372	391	438	485	565	658	749	840	932	1024
	120"	224	253	274	345	366	396	416	466	518	602	699	794	891	989	1086
	132"	239	271	333	365	387	420	442	513	567	638	739	842	944	1045	1147
	144"	253	286	351	386	408	444	466	542	601	674	781	888	994	1101	1209
	156"	268	343	369	405	430	466	492	571	634	711	822	935	1047	1158	1269
	168"	281	359	387	425	452	490	518	601	666	747	866	980	1099	1216	1332
	180"	296	375	405	446	474	514	543	629	699	783	906	1027	1150	1272	1394
	192"	310	392	424	464	496	538	569	659	732	820	947	1074	1202	1328	1455

● Width (Inches)

● Height (Inches)

PRICE GRID 3 MSRP

FABRICS

WINDOW OPENING

		36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
3000 Net 1%	36"	149	168	179	198	210	230	240	271	341	397	466	538	606	677	746
3000 Net Privacy	48"	169	190	206	227	241	264	276	312	389	451	528	606	684	761	839
4000 Net 3%	60"	188	213	231	254	272	297	314	356	436	506	590	677	761	847	932
4000 Net 5%	72"	209	235	255	284	304	331	351	436	485	560	653	746	839	932	1025
Avila Daylight Residential <1%	84"	229	259	281	311	334	365	426	480	534	614	715	815	915	1016	1119
Sheerweave Basic 3%	96"	248	281	307	341	403	436	462	523	582	681	788	893	999	1104	1210
Sheerweave Basic 5%	108"	268	305	332	369	432	471	499	565	630	736	849	964	1077	1189	1304
Sheerweave 2100 10%	120"	287	328	358	432	464	505	537	607	679	790	911	1032	1153	1275	1396
Sheerweave 2360 10%	132"	308	350	419	462	496	539	574	664	740	844	972	1102	1231	1360	1489
Sheerweave 2710 10%	144"	328	372	446	490	527	574	609	706	790	899	1034	1172	1308	1445	1581
Sheerweave 3000 14%	156"	348	430	471	519	559	607	647	750	838	952	1096	1242	1386	1530	1674
Sheerweave 4100 Eco 10%	168"	367	453	496	547	590	641	684	792	887	1007	1158	1310	1462	1615	1768
	180"	387	475	521	576	620	675	722	836	935	1060	1220	1381	1540	1700	1860
	192"	407	498	547	604	653	708	758	878	983	1114	1282	1451	1617	1785	1954

● Width (Inches)

● Height (Inches)

PRICE GRID 4 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
E Screen 5%	36"	174	196	209	232	245	267	279	315	399	464	548	630	714	795	878
E Screen 10%	48"	196	221	239	265	279	307	323	365	454	526	618	708	801	892	985
M Screen 5%	60"	219	249	268	297	316	345	365	414	509	589	689	790	890	990	1090
Mesa LF	72"	242	275	297	330	353	385	407	509	565	650	760	870	978	1088	1197
Sheerweave 2000 5%	84"	266	300	328	363	388	425	494	558	620	714	831	948	1066	1185	1302
Sheerweave 2390 5%	96"	289	328	356	395	468	508	538	606	675	792	914	1037	1162	1285	1408
Sheerweave 2410 3%	108"	311	353	386	428	505	548	580	657	732	854	987	1119	1250	1383	1515
Sheerweave 2703 3%	120"	334	381	415	505	541	586	623	704	788	915	1056	1197	1339	1480	1620
Sheerweave 2705 5%	132"	358	406	487	538	576	626	664	770	858	977	1126	1277	1427	1576	1727
Sheerweave 4000 Eco 5%	144"	381	431	517	570	613	664	706	820	914	1038	1199	1357	1516	1674	1833
Sheerweave 4400 Eco 3%	156"	403	502	547	603	647	704	750	869	970	1101	1268	1436	1605	1771	1939
Sheerweave 4500 5%	168"	426	527	576	636	684	744	792	916	1025	1163	1339	1516	1692	1869	2045
Sheerweave 4550 5%	180"	449	552	605	668	721	782	835	967	1081	1224	1411	1595	1781	1966	2152
Sheerweave 4903 3%	192"	472	580	635	701	756	822	877	1014	1135	1286	1481	1674	1869	2063	2257
Sheerweave 7250R LF																
Sheerweave 7450 LF																
Sheerweave 7650 LF																
Sheerweave 7750R LF																
Wide Shade BO																

● Width (Inches)

● Height (Inches)

PRICE GRID 5 MSRP

FABRICS

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"	
9803 3%	36"	196	220	239	264	281	306	325	366	446	528	613	697	781	867	950
Avila Twilight Residential BO	48"	226	254	276	306	329	358	381	430	518	609	706	802	900	997	1092
Balmoral LF	60"	254	289	314	348	374	408	435	496	592	693	801	910	1019	1126	1235
E Screen 3%	72"	284	322	353	391	422	460	491	596	666	776	897	1016	1135	1257	1377
GreenScreen Evolve 3%	84"	312	355	391	432	469	512	581	660	738	857	990	1123	1255	1387	1519
M Screen 1%	96"	342	389	429	475	549	597	637	724	813	952	1093	1238	1378	1520	1663
M Screen 3%	108"	371	422	466	518	596	647	693	790	886	1034	1188	1342	1496	1650	1805
M Screen Deco 3%	120"	400	455	505	595	642	700	749	854	959	1117	1283	1450	1615	1782	1947
M Screen Deco 5%	132"	429	490	575	637	691	751	804	932	1045	1200	1377	1555	1733	1911	2090
S Screen Naturals 5%	144"	459	524	614	679	736	801	859	996	1119	1282	1473	1662	1851	2042	2232
Sheerweave 2500 1%	156"	487	589	650	722	783	854	915	1060	1191	1364	1566	1768	1970	2173	2374
Sheerweave 2701 1%	168"	517	624	689	763	829	905	971	1124	1266	1447	1660	1874	2088	2303	2516
Sheerweave 4600 3%	180"	546	657	727	807	877	956	1027	1189	1339	1529	1755	1980	2208	2432	2660
Sheerweave 4650 3%	192"	575	691	765	849	924	1008	1084	1254	1414	1610	1849	2087	2325	2564	2801
Sheerweave 4800 1%																
Sheerweave 4901 1%																
Sheerweave 5000 1,3,5,7,10%																
Sheerweave 7100 BO																
Sheerweave 7200R BO																
Sheerweave 7500 BO																
Sheerweave 7700R BO																
Sheerweave 7850 LF																
T Screen 3%																
Verona Daylight <1%																

● Width (Inches)

● Height (Inches)

PRICE GRID 6 MSRP

FABRICS

WINDOW OPENING

		36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
E Screen 1%	36"	226	254	273	303	322	351	370	417	513	606	705	807	908	1007	1108
E Screen Deco 1%	48"	256	292	315	350	373	406	430	488	595	696	810	922	1035	1150	1263
E Screen Deco 3%	60"	290	329	358	395	425	463	492	559	674	785	912	1038	1165	1291	1418
Green Screen REVIVE 1%	72"	323	365	399	443	477	519	552	677	755	877	1016	1155	1296	1434	1574
GreenScreen REVIVE 5%	84"	354	403	442	488	527	576	660	747	836	967	1120	1271	1423	1576	1729
Mesa BO	96"	387	441	483	537	624	678	721	818	915	1073	1236	1398	1559	1723	1884
Natte 10%	108"	420	477	525	583	675	734	782	889	996	1163	1339	1514	1690	1866	2039
S Screen 1%	120"	451	514	568	674	726	791	843	960	1077	1254	1442	1630	1819	2006	2195
S Screen 4%	132"	484	551	653	721	779	847	905	1048	1174	1343	1546	1747	1947	2149	2351
Sheerweave 7600 BO	144"	517	587	694	767	829	904	966	1119	1254	1433	1648	1862	2078	2292	2507
Sheerweave 7800 BO	156"	548	668	736	814	881	959	1027	1189	1335	1522	1751	1979	2207	2433	2662
Sheerweave 8000 3% PVC Free	168"	581	705	778	860	933	1016	1088	1261	1416	1614	1854	2096	2335	2577	2817
T Screen 1%	180"	614	744	820	908	985	1071	1150	1332	1495	1704	1958	2211	2465	2719	2972
T Screen Deco 3%	192"	645	780	861	954	1035	1129	1210	1401	1576	1793	2060	2328	2595	2860	3127
T Screen Deco 5%																

● Width (Inches)

● Height (Inches)

PRICE GRID 7 MSRP

FABRICS

Balmoral BO
Sheerweave 7400 BO
Sheerweave Infinity2 3%
Sheerweave Infinity2 5%
T Screen Deco 1%
Verona Twilight 0%

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
36"	250	281	304	334	356	388	411	464	567	672	780	888	997	1104	1212
48"	286	323	351	388	416	453	481	546	659	776	898	1022	1145	1268	1393
60"	323	365	399	442	474	518	550	627	751	878	1016	1154	1294	1431	1571
72"	359	407	447	494	534	582	620	755	843	980	1133	1287	1441	1595	1749
84"	396	450	493	548	592	646	736	836	935	1085	1252	1421	1590	1758	1927
96"	432	492	542	602	695	756	805	916	1027	1205	1384	1565	1745	1924	2104
108"	469	536	589	656	755	820	876	997	1119	1307	1503	1697	1892	2088	2283
120"	506	576	638	752	813	886	946	1079	1210	1411	1619	1830	2041	2251	2462
132"	543	618	727	805	872	949	1014	1177	1320	1514	1738	1964	2189	2415	2640
144"	580	661	777	858	931	1013	1086	1257	1412	1616	1857	2097	2336	2577	2818
156"	616	746	823	912	990	1079	1155	1338	1504	1720	1975	2231	2486	2740	2996
168"	653	789	872	966	1048	1143	1224	1419	1596	1823	2093	2364	2635	2904	3175
180"	691	831	919	1019	1108	1207	1296	1499	1689	1926	2211	2496	2782	3067	3354
192"	726	873	967	1071	1166	1271	1365	1581	1781	2028	2330	2629	2930	3231	3531

● Width (Inches)

● Height (Inches)

PRICE GRID 8 MSRP

FABRICS

E Screen KOOL BLACK 5%
Natte 3%
Natte 5%
Satine 5%
Sheerweave 2390 Performance Plus 5%
Sheerweave 7000 BO
Sheerweave Infinity2 1%
T Screen KOOL BLACK 1%
T Screen KOOL BLACK 3%
Vizela

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
36"	266	298	323	356	382	415	438	496	602	715	828	942	1056	1170	1284
48"	305	344	374	415	444	484	514	583	701	827	957	1087	1218	1346	1477
60"	344	391	426	472	508	554	589	672	801	938	1086	1231	1377	1524	1671
72"	385	435	479	529	571	624	666	807	901	1051	1212	1376	1539	1702	1866
84"	424	482	529	586	636	693	788	893	1000	1162	1341	1520	1700	1879	2058
96"	463	526	581	645	744	809	861	980	1101	1290	1483	1674	1868	2059	2252
108"	504	572	634	702	807	878	938	1069	1201	1403	1612	1821	2027	2236	2445
120"	542	618	684	804	871	947	1013	1157	1300	1515	1738	1965	2189	2413	2639
132"	582	663	779	861	934	1018	1089	1262	1417	1627	1868	2110	2351	2591	2831
144"	623	708	831	919	998	1087	1165	1350	1517	1737	1997	2253	2510	2768	3026
156"	661	798	881	977	1062	1157	1241	1437	1616	1850	2123	2397	2671	2946	3220
168"	701	844	934	1034	1125	1225	1317	1524	1716	1962	2252	2542	2833	3123	3413
180"	739	889	987	1092	1188	1297	1393	1613	1816	2074	2382	2686	2993	3300	3607
192"	780	935	1036	1150	1252	1365	1469	1700	1916	2185	2508	2831	3154	3477	3798

● Width (Inches)

● Height (Inches)

PRICE GRID 9 MSRP

FABRICS

E Screen KOOL BLACK 3%
GreenScreen NATURE 5%
Satine 1%
Sheerweave 2410 Performance Plus 3%
Sheerweave 2500 Performance Plus 1%

WINDOW OPENING

	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
36"	297	334	363	400	428	465	493	559	672	801	927	1052	1177	1301	1425
48"	342	387	422	466	502	546	581	660	788	932	1074	1219	1362	1507	1649
60"	388	439	482	532	575	626	668	761	902	1060	1222	1385	1549	1711	1873
72"	432	491	541	600	647	706	756	910	1018	1189	1372	1552	1734	1916	2097
84"	480	545	601	666	722	788	888	1010	1133	1318	1519	1720	1920	2121	2321
96"	524	597	660	732	839	913	975	1112	1249	1464	1680	1898	2114	2330	2545
108"	570	648	719	798	912	993	1063	1212	1364	1595	1828	2064	2299	2534	2770
120"	615	701	779	909	987	1073	1150	1315	1480	1724	1978	2232	2485	2739	2993
132"	660	754	880	975	1058	1153	1238	1433	1612	1852	2125	2398	2671	2945	3218
144"	705	807	939	1042	1132	1233	1324	1535	1727	1981	2274	2566	2857	3149	3442
156"	751	901	999	1109	1206	1315	1412	1636	1843	2112	2422	2732	3044	3355	3665
168"	796	954	1058	1174	1279	1395	1498	1736	1958	2240	2570	2900	3230	3559	3889
180"	842	1007	1119	1241	1353	1475	1586	1839	2072	2369	2718	3067	3417	3764	4114
192"	888	1058	1178	1307	1426	1554	1673	1939	2188	2498	2868	3234	3601	3969	4336

● Width (Inches)

● Height (Inches)

PRICE GRID 10 MSRP

FABRICS

WINDOW OPENING

		36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
E Screen Chroma 3%	36"	377	426	463	510	548	596	634	718	851	1023	1174	1327	1478	1631	1783
E Screen KOOL BLACK 1%	48"	438	494	542	600	645	702	750	854	1005	1196	1373	1551	1728	1906	2085
Flocke BO	60"	498	564	620	686	744	811	867	990	1159	1367	1572	1775	1979	2181	2386
Laminates	72"	558	635	700	776	842	916	983	1172	1315	1541	1770	2000	2230	2456	2686
	84"	618	703	779	862	938	1024	1145	1307	1469	1715	1969	2223	2479	2734	2988
	96"	678	772	857	952	1081	1177	1262	1442	1624	1905	2181	2457	2735	3012	3288
	108"	738	842	936	1041	1179	1284	1378	1577	1779	2079	2382	2682	2984	3287	3589
	120"	798	912	1014	1173	1277	1392	1495	1714	1932	2252	2580	2907	3236	3563	3890
	132"	858	980	1139	1262	1374	1498	1612	1867	2102	2426	2779	3131	3485	3839	4191
	144"	917	1051	1217	1350	1473	1606	1728	2001	2256	2599	2977	3356	3735	4114	4492
	156"	978	1163	1296	1438	1571	1714	1845	2136	2412	2771	3176	3579	3984	4389	4794
	168"	1037	1232	1374	1527	1668	1821	1962	2273	2566	2945	3375	3804	4235	4664	5094
	180"	1099	1302	1453	1615	1766	1927	2079	2408	2720	3117	3574	4028	4485	4940	5396
	192"	1159	1372	1532	1703	1863	2035	2195	2543	2875	3291	3772	4253	4734	5215	5696

● Width (Inches)

● Height (Inches)

PRICE GRID 11 MSRP

BRACKETS & ACCESSORIES

Banded Shade Coupler Acmeda 44	92
4" Fascia Bracket & Indexable Coupler Set	135
7" Fascia Dual Shade Bracket	246
7" Dual Coupler Set	363

SPRING ASSIST

R Series Pin End Spring Assist	37
Skyline Pin End Spring Assist	37
R Series & Skyline Spring Assist 36"	188
R Series & Skyline Spring Assist 45"	193

MANUAL CLUTCH ACCESSORIES

SafetyHold3	4
Stainless Steel & Other Finish Chain	12
Outdoor Clutch	7
Galaxy 200 Clutch	51
Galaxy 400 Clutch	65
EasySpring Plus/ULTRA Cordless System	96
Batten Surcharge Per Foot, Per Batten	21

SKYLINE BOTTOM UP ROLLER SHADES

Width	36"	48"	60"	72"	84"	96"
MSRP	322	403	483	563	645	724

PRICE GRID 11 MSRP CONTINUED

FASCIA-includes brackets

3" Uncovered Fascia
4" Uncovered Fascia
5" Uncovered Fascia system (dual or single)
7" Dual Shade Uncovered Fascia
3" Covered Fascia
4" Covered Fascia
5" Covered Fascia

● Width (Inches)

CASSETTES

Cassette 100
Cassette 120
P95 Cassette

● Width (Inches)

VALANCE & HEM BAR

Standard Inserted Valance
Soft Valance
External Oval Hem Bar

● Width (Inches)

HANGER

SB21-0514-075490 I Clip Recess Closure White (No Lip)
SB21-0514-020490 I Clip Recess Closure Ano (No Lip)

● Width (Inches)

POCKET-CONTRACT

RCCP3W 3" Pocket Contract (3.51" x 3.09") White
RCBC2W Bottom Closure for 3" (2.22") White
RCEP3W End Plate for 3" Pocket White, Pair, Inc screws

RCCP3A 3" Pocket Contract (3.51" x 3.09") Ano

RCBC2A Bottom Closure for 3" (2.22") Ano
RCEP3A End Plate for 3" Pocket Ano, Pair, inc screws

RCCP4W 4" Pocket Contract (4.51" X 4.09") White

RCBC3W Bottom Closure for 4" (2.73") White
RCEP4W End Plate for 4" Pocket, White, Pair

RCCP4A 4" Pocket Contract (4.51" X 4.09") Ano

RCBC3A Bottom Closure for 4" (2.73") Ano
RCEP4A End Plate for 4" Pocket, Ano, Pair

RCCP5W 5" Pocket Contract (5.63" X 5.30") White

RCBC5W Bottom Closure for 5" (2.67") White
RCEP5W End Plate for 5" Pocket, White

RCCP5A 5" Pocket Contract (5.63" X 5.30") Ano

RCBC5W Bottom Closure for 5" (2.67") Ano
RCEP5W End Plate for 5" Pocket, Ano, Pair

RCCP6W 6" Pocket Contract (6.13" X 5.81") White

RCBC6W Bottom Closure for 6" (3.6") White
RCEP6W End Plate for 6" Pocket, White, Pair

RCCP6A 6" Pocket Contract (6.13" X 5.81") Anno

RCBC6A Bottom Closure for 6" (3.6") Ano
RCEP6A End Plate for 6" Pocket, Ano, Pair

Note: Shade Pocket Sizing: OB Exact Width, IB Width less 1/8". A pair of end caps further reduce width by 3/16"

● Width (Inches)

SIDE CHANNELS- PRICE GRID IS BASED ON HEIGHT

RS-TC1-5 OB Mount Commercial Side Channel 2.17"x 1"
RS-VE1-5 Fabric Guide OB Commercial Side Channel-each
RS-TE1-5 IB Mount Commercial U Channel 2.17" x 1"
RS-VJ1-5 Fabric Guide U Channel

● Height (Inches)

Note:MSRP is for 1 channel only but typically 2 are used

Note: Both Commercial Side Channels and fabric Guides are available in White, Alabaster, Anodized, Bronze and Black

Note: Side Rails include black 7mm x 5mm brush strip

LUTRON COMPATIBLE SHADE POCKET

Shade Pocket (3.5"x3.5") White

Bottom Closure for 3.5" White
End Cap for 3.5" Pocket, White, Pair

Note: White only, other colors available by special order

Shade Pocket (4.75" X 5") White

Bottom Closure for 4.75" White
End Cap for 4.75" Pocket White, Pair

Note: White only, other colors available by special order

● Width (Inches)

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
59	65	70	79	85	90	97	111	122	136	149	161	174	187	200
77	85	91	99	108	116	122	139	153	169	184	200	216	231	246
118	132	147	162	177	191	207	221	237	251	266	281	296	310	326
366	413	459	506	552	598	645	690	737	782	829	876	922	969	1014
147	165	179	196	211	228	244	275	307	339	371	403	435	466	498
191	210	230	250	268	288	307	345	384	422	460	499	538	575	616
352	397	441	486	531	575	620	663	710	752	799	842	888	932	977

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
88	99	111	121	133	144	154	177	199	221	242	265	287	309	332
98	111	122	136	147	160	173	197	221	245	270	295	319	344	367
98	111	122	136	147	160	173	197	221	245	270	295	319	344	367

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
46	54	58	64	70	74	77	92	100	113	122	132	143	152	160
46	54	58	64	70	74	77	92	100	113	122	132	143	152	160
37	47	53	57	62	66	70	77	86	96	105	116	124		

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
36	43	48	55	61	67	73	85	97	109	121	133	145	157	169
40	46	53	59	66	73	79	92	106	119	132	145	158	172	185

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
96	112	128	144	160	176	191	223	255	287	319	351	383	415	447
40	46	53	59	66	73	79	92	106	119	132	145	158	172	185
11														

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
106	123	141	158	176	194	211	246	282	317	352	387	422	458	493
43	51	57	65	72	79	86	100	114	129	143	157	172	186	200
14														

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
125	146	167	188	209	230	251	293	334	376	418	460	502	543	585
56	66	75	85	94	103	112	131	150	168	187	206	224	243	262
17														

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
135	158	180	204	226	249	271	316	361	406	451	496	541	586	631
77	66	75	85	94	103	112	131	150	168	187	206	224	243	262
19														

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
228	266	304	342	380	418	455	531	607	683	759	835	911	987	1063
59	69	79	89	99	109	119	139	158	178	198	218	238	257	277
24														

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
261	305	348	392	435	479	521	608	695	782	869	956	1043	1130	1217
69	81	92	105	116	128	139	162	185	208	231	254	277	300	323
25														

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
350	408	466	525	583	641	700	816	933	1049	1166	1283	1399	1516	1632
59	69	78	89	99	109	119	139	158	178	198	218	238	258	277
26														

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
376	439	502	564	627	690	752	878	1003	1129	1254	1379	1505	1630	1756
73	85	97	109	121	133	145	169	194	218	242	266	290	315	339
26														

36"	48"	60"	72"	84"	96"	108"	120"	132"	144"	156"	168"	180"	192"
53	70	88	106	123	141	158	176	194	211	229	246	264	282
4													
69	92	116	139	162	185	208	231	254	277	300	323	347	370
4													

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
120	140	160	180	200	220	240	280	320	360	400	440	480	520	560
39	46	52	59	65	72	78	91	104	117	130	143	156	169	182
36														

36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"	132"	144"	156"	168"
171	200	228	257	285	314	342	399	456	513	570	627	684	741	798
60	70	80	90	100	110	120	140	160	180	200	220	240	260	280
55														

SOMFY RTS BATTERY		
Part #	Somfy External Battery Powered RTS Motors & Accessories	MSRP
1241230	Sonesse 28 WireFree RTS External Battery Motor - requires 9021217 Li-ion Rechargeable Battery Pack and 9025166 Charger	432
9021217	Li-ion Rechargeable External Battery Pack for 1241230- requires the 9025166 charger	112
1822445	12V DC Plug in Power Supply w/ 3m cable - white for 1241230 Sonesse 28 External Battery Motor	248
9027294	WireFree Li-Ion Solar Panel Kit – kit includes solar panel, brackets and glass mount adhesive-when used with 1241230 motor, requires 9021217 Rechargeable External Battery Pack	203
Part #	Somfy Internal Li-ion Rechargeable Battery RTS Motors-Interior	MSRP
1240278	Roll Up 24 WireFree RTS Li-ion Motor	404
1003297	Sonesse 28 WireFree RTS Li-ion Motor 1.1 nm	512
1003310	Sonesse ULTRA 30 WireFree RTS Li-ion Motor	533
1240485	Sonesse 40 WireFree 403 RTS Li-ion	755
Part #	Somfy Li-ion Battery Chargers & Extension Cables	MSRP
9027294	WireFree Li-Ion Solar Panel Kit – includes solar panel, brackets and glass mount adhesive	203
9025166	Charger 6' Cable for 1003297 Sonesse 28, 1003310 Sonesse 30 ULTRA, 1240485 Sonesse 40 & 1240278 Roll Up 24	42
9021131	Charger 8" Extension Cable-for Version 2 motors. Recommended for fascia/shadebox/cassette options	13
9021016	Charger 94.5" Extension Cable-for 9025166	15
SOMFY WIRED		
Part #	SOMFY Wired 24 Volt DC RTS Motors-Interior	MSRP
1241142	Sonesse 30 RTS 24v Motor -901474 power cable included	789
1134023	Sonesse ULTRA 504 A8 DC RTS -9020005 power cable included	1096
Part #	24v DC Power Options	MSRP
1822209	24v Single Motor Wall Wart Power Supply (for ST-30 & ULTRA 504 DC)	106
9014794	24 V DC 2 Conductor Power Cable for 1241142 motor (cable provided with motor)	23
9020005	RTS Power Cable for 1134023 motors (cable provided with motor)	61
24v 5 Motor	24v 5 Motor Power/Distribution Panel (for ST-30 & ULTRA DC)	1246
24v 10 Motor	24v 10 Motor Power/Distribution Panel (for ST-30 & ULTRA DC)	1515

SOMFY RTS		
Part #	SOMFY 110v AC Line Voltage RTS Motors-Interior/Exterior	MSRP
1001636	Sonesse 40 RTS 404S2 (w/ 11' pigtail)	872
1240380	Sonesse 40 RTS 404S2 (with 19" FAST CONNECT)	872
1240382	Sonesse 40 RTS 409R2 (w/ 19" FAST CONNECT)	916
1002562	Sonesse ULTRA 506A2 RTS	1012
1001809	Sonesse 506S2 RTS (non-ULTRA)	752
1001807	Sonesse 510S S2 RTS	1088
RTS MOTOR CABLES & PLUGS		
Note: LT-40 Motor cables ARE NOT Removable and Motors are Ordered with the Fast Connect Motor Side Cable Preinstalled		
Note: LT-50 Motor cables ARE Removable and Motors are Ordered with the Motor Side Fast Connect Cable-9020803 below		
Part #	LT-50 RTS & RS485 (SDN) 3 Wire	MSRP
9020803	LT50 RTS & RS485 (SDN) Motor Side to FAST Connect Cable - 1.6'	80
Part #	3 WIRE RTS, RS485 (SDN) Fast Connect Extension Cables with AC Plug	MSRP
9021113	Fast Connect RTS/RS485 (SDN) Extension Cable w/ AC plug - 1.4'	47
9021114	Fast Connect RTS/RS485 (SDN) Extension Cable w/ AC plug - 4.4'	54
9021115	Fast Connect RTS/RS485 (SDN) Extension Cable w/ AC plug - 8.4'	64
9020791	Fast Connect RTS/RS485 (SDN) Extension Cable w/ AC plug - 10.4'	86
9020792	Fast Connect RTS/RS485 (SDN) Extension Cable w/ AC plug - 18'	107
9020793	Fast Connect RTS/RS485 (SDN) Extension Cable w/ AC plug - 24'	126
Part #	RTS, RS485 (SDN) 3 Wire Fast Connect Cables without Plug	MSRP
9021157	Fast Connector RTS/RS485 (SDN) Extension Cable OPEN LEADS - 8.4'	66
Part #	Other Motor Cable & Plug Options	MSRP
AP Loose	Angle AC Plug Loose (cable length must be specified)	34
AP installed	Angle AC Plug installed on motor (cable length must be specified)	82

Part #	RTS RS485 (SDN) 3 WIRE Cables with Plug for LT 50	MSRP
9021049	LT50 RTS/RS485 Motor Cable w/ AC Plug – 1.5'	34
9021050	LT50 RTS/RS485 Motor Cable w/ AC Plug – 6'	47
9021051	LT50 RTS/RS485 Motor Cable w/ AC Plug – 10'	49
9021052	LT50 RTS/RS485 Motor Cable w/ AC Plug – 18'	62
9021053	LT50 RTS/RS485 Motor Cable w/ AC Plug – 24'	103
Part #	LT-50 RTS RS 485 3 WIRE Cables without AC Plug	MSRP
9018190	LT50 RTS/RS485 Motor Cable OPEN LEADS AC Plug – 10'	66
9020985	LT50 RTS/RS485 Motor Cable OPEN LEADS AC Plug – 24'	115
SOMFY RTS CONTROLS		
Part #	Situo Handheld RTS Controls - Interior Use Only	MSRP
1870571	Situo 1 Pure - white (stocked)	122
1870572	Situo 1 Iron	176
1870573	Situo 1 Natural	176
1870574	Situo 1 Arctic	176
1870575	Situo 5 Pure - white (stocked)	160
1870576	Situo 5 Iron	215
1870577	Situo 5 Natural	215
1870578	Situo 5 Arctic	215
1811081	Telis 16 Pure - white	544
1811082	Telis 16 - silver	599
1805237	Telis 1 Chronis Pure	431
Part #	Telis Handheld RTS Controls – Exterior & Interior Use	MSRP
1810643	Telis 1 Patio Transmitter exterior/interior	166
1810645	Telis 4 RTS Patio Transmitter-exterior	231
Part #	Smoove Wall Mounted RTS Controls	MSRP
1811533	Smoove 1 RTS Pure - white (stocked)	161
1811748	Smoove 4 RTS Pure - white (stocked)	200
9015022	Smoove Frame Pure - white	6
9015023	Smoove Frame - black	17
9015025	Smoove Frame - silver matte	17
9015026	Smoove Frame - amber bamboo	54
9015027	Smoove Frame - light bamboo	54
9015236	Smoove Frame - cherry	54
9015237	Smoove Frame - walnut	54
9015238	Smoove Frame Double - pure	54

Part #	MISC RTS Controls					MSRP
1811731	Tahoma RTS Interface					505
1870470	Tahoma Ethernet Adapter					43
1810872	Somfy Universal RTS Interface II - URTSI					972
1810791	RTS Repeater					441
9013707	RTS Sunis Indoor WireFree Sun Sensor					473
DecoFlex in Wall Wireless Remote Controls						
White			Ivory		Black	
	Part #	MSRP	Part #	MSRP	Part #	MSRP
DecoFlex 1	1810897	306	1810898	308	1810899	353
DecoFlex 2	1811068	310	1811069	310	1811067	370
DecoFlex 3	1811071	314	1811072	314	1811070	362
DecoFlex 4	1811074	317	1811075	317	1811073	366
DecoFlex 5	1810813	321	1810814	321	1810830	370
Part #		MSRP	Custom Engraving Available-contact Customer Service			
1811185	DecoFlex Table Top White	71				
1811051	DecoFlex Table Top Black	71				
1810972	DecoFlex Table Top Silver	71				

SOMFY STANDARD MOTORS - Interior		
Part #	Somfy Standard Motors – 4 Conductor	MSRP
1001553	Sonesse 40 404S2 RH - WITHOUT FAST CONNECT	573
1240377	Sonesse 40 404S2 RH - WITH 4 wire FAST CONNECT	573
1240379	Sonesse 40 409S2 RH - WITH 4 wire FAST CONNECT	615
1002558	Sonesse ULTRA 506S2 Star Head	774
1001814	Sonesse 506S2 Star Head	673
1001813	Sonesse 510S2 Star Head	821
Part #	Standard Motor Cable Options – 4 Conductor	MSRP
9012160	Anderson Power Plug Installed on Motor side (male-white) 12"	28
9012161	Anderson Power Plug Installed on J-Box side (female-black) 60"	29
	Wago Plug loose	46
	Wago Plug Installed on Motor	80
Part #	4 Conductor Fast Connect Extension Cable with Open Leads	MSRP
9020804	LT50 4 Wire Motor Pigtail to Fast Connector - 1.6'	80
9021117	Fast connector Extension Cable 4 Wire - 4.4'	57
9021118	Fast connector Extension Cable 4 Wire - 8.4'	67
9021120	Fast connector Extension Cable 4 Wire - 16.4'	101
9021121	Fast connector Extension Cable 4 Wire - 22.4'	117
9018345	LT50 4 Wire Motor Cable with Open Leads – 10'	64
9021046	LT50 4 Wire Motor Cable with Open Leads – 24'	137
Part #	Standard Motor Controls	MSRP
1811416	IGC 4n1 Motor Controller	870
1811402	Decoflex Dry Contact Keypad	113
1811492	IGC 4n1 RTS Radio Receiver	354
1800374	Single Pole Double Throw Maintained Decora Switch White	45
1800373	Single Pole Double Throw Maintained Decora Switch Ivory	41
1800375	Double Pole Double Throw Maintained Decora Switch White	82
1800376	Double Pole Double Throw Maintained Decora Switch Ivory	82

SOMFY DIGITAL NETWORK - SDN		
Part #	Somfy Digital Network (SDN) RS485 Motors	MSRP
1134022	Sonesse ULTRA 504 A8 DC RS485 (24v DC Motor)	1329
1000658	Sonesse 30 RS485 (24v DC Motor)	867
1002566	Sonesse ULTRA 506A2 RS485 (110v AC)	1246
1002286	Sonesse 506S2 RS485	1174
1002287	Sonesse 510S2 RS485	1321
Part #	RS485 Power & Data Cable Options- Power & Data Grey	MSRP
9018545	4 Cond. 26 AWG modular cable with RJ9 on one end and RJ45 other end-2.5 ft.	25
9018546	4 Cond. 26 AWG modular cable with RJ9 on one end and RJ45 other end-8 ft.	39
9018547	4 Cond. 26 AWG modular cable with RJ9 on one end and RJ45 other end-12 ft.	44
9018548	4 Cond. 26 AWG modular cable with RJ9 on one end and RJ45 other end-24 ft.	56
Part #	Data Only Black	MSRP
9018541	4 Cond. 26 AWG modular cable with RJ9 on one end and RJ45 other end-2.5 ft.	25
9018542	4 Cond. 26 AWG modular cable with RJ9 on one end and RJ45 other end-8 ft.	39
9018543	4 Cond. 26 AWG modular cable with RJ9 on one end and RJ45 other end-12 ft.	44
9018544	4 Cond. 26 AWG modular cable with RJ9 on one end and RJ45 other end-24 ft.	56
Part #	RS485 Accessories	MSRP
1822440	Buss & Sensor Station Power Supply	302
1870259	Power Panel for SDN	3096
1870262	Data HUB	225
1870272	Somfy Connect Universal Automation Interface (UAI) Plus	1160
9015260	USB to RS485 Adaptor for SDN	898
9017142	RS485 Motor Limit Setting & Address Reader Tool	849
9019873	RS485 Sonesse ULTRA 50 Dc SETTING Tool Cable - 20'	196
1811252	SDN Decoflex Keypad 6 button (white)	302
1811253	SDN Decoflex Keypad 8 button (white)	326
1800219	Dry Contact Open, Close, Stop Wall Switch (White)	154
1800220	Dry Contact Open, Close, Stop Wall Switch (Ivory)	162
1822294	RTS Receiver for SDN	216

AUTOMATE RADIO COMMUNICATION BY ROLLEASE ACMEDA		
PART #	MOTORS	
MTDCBRF25-1.1	Li-ion 1.1	450
MTDCBRFQ28-2	Li-ion Q2.0	547
MTDCBRF35-3	Li-ion 3.0	613
MTDCBRFQ45-3	Li-ion Q3.0	658
MTDCBRF45-10	Li-ion Q10	703
PART #	CHARGER & CABLES	
MTDCB-CHARGE	Recharger 12V Battery Motors (25, 28, 35, 45)	76
MTDCB-CBLXT6	DC Battery Motor Cable Extender 6"	14
MTDCB-CBLXT48	DC Battery Motor Cable Extender 48"	22
MTDCB-CBLXT96	DC Battery Motor Cable Extender 96"	28
PART #	SOLAR CHARGER & CABLES	
MT03-0302-067001	Solar Panel 2.0	278
MTDCB-YCBL-SOL	Solar Panel Y Cable - 2 Solar Panels 1 Motor	15
PART #	CONTROLS - HAND HELD	
MTRF-REM 1C	Automate 1 Channel RF Remote - White	135
MTRF-REM-15NL	Automate 15 Channel Remote w/Level Control WHITE	160
MT02-0101-067004	AUTOMATE Push5 White Remote	139
MT02-0101-067008	AUTOMATE Push15 White Remote	160
MT02-0101-050004	AUTOMATE Push5 Black Remote	139
MT02-0101-050008	AUTOMATE Push15 Black Remote	160
PART #	CONTROLS - WALL MOUNT	
MTRF-SW5-FLUSH	5 Channel Wall Switch - Surface Mount	110
MTRF-WS-1C	1 Channel Wall Switch - Cut In	94
MTRF-WS-2C	2 Channel Wall Switch - Cut In	105
MTRF-WS-15	15 Channel wall switch -Cut In	116
MTRF-WS-COVER	Decorator Screw-less Switch Cover Plate	24
PART #	AUTOMATION ACCESSORIES	
MT02-0401-067001	Automate Pulse 2 Bridge White/Platinum	554
MT02-0401-067004	Smart Home Collections Bridge kit	554
MT02-0401-067005	R-TEC Bridge kit	554
MT02-0301-050002	Automate Motion Sensor-Black	273
MT02-0301-072002	Automate Motion Sensor-White	273
MTRF-SUNSENS	Internal Sun Sensor	86
MT02-0401-069007	ARC USB Repeater - White	179
Note: These prices represent the upcharge to motorize Pristine Roller Shades with Automate Radio Communication (ARC). Add this price to the manual shade price.		



Quality Wholesale Window Coverings
Contract • Hospitality • Healthcare • Residential

LIFETIME LIMITED WARRANTY FOR CUSTOM ROLLER SHADES

Porter Preston proudly extends a lifetime-limited warranty on the enclosed product to the original retail purchaser as long as the product remains in the original window.

WARRANTY COVERAGE

Entire product against manufacturing defects (i.e., a flaw in the product design, materials or workmanship that causes the product to no longer function).....**Lifetime**
All fabric (except laminated shades).....**5 years**
Somfy/Rollease products.....**5 years**.....

NOT COVERED

Normal wear and tear

Any product that fails due to:

- abuse
- exposure to salt air
- improper installation
- accident
- extraordinary use
- improper operation
- alterations
- improper cleaning
- misapplication
- damage from pets/insects
- improper handling
- misuse

Any product that, with the passage of time, has:

- loss of color intensity

Costs associated with:

- product removal
- transportation to and from the retailer
- brand label removal
- product remeasure
- incidental or consequential damages
- product reinstallation
- shipping

In the event there are multiple shades in the same room, only the defective shade will be replaced.

If damage occurred during shipping, call 1-866-753-1113 and report within 14 calendar days or else you may be denied credit for your damaged product.

Any unauthorized returns will not be accepted.

THIS SHALL BE YOUR SOLE REMEDY UNDER THIS LIMITED WARRANTY.

If this product is found to have a manufacturing defect in materials or workmanship, we will (at our discretion) do one of the following:

- repair the product
- replace the product
- refund the cost of the product
- Colors vary from lot to lot and may not exactly match sample swatch or previous purchases.
- Discontinued items or color selections will be replaced with the closest equivalent current product.

YOUR RIGHTS UNDER STATE LAW

This lifetime limited warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Some states do not allow limitations on how long a warranty lasts, so the above limitations may not apply to you. No agent, representative, dealer, or unauthorized employee has the authority to increase or alter the obligation of this warranty. This lifetime limited warranty supersedes any previous versions.