

# Detection and Calculation of Stroke Affected Area in Hemorrhagic Brain Stroke CT Images using K-Means Clustering Algorithm

Pooja Chukkanakal  
*M.Tech (Software Engineering)*  
*Department of ISE, RVCE*  
*Bengaluru, India.*

Dr. G. N. Srinivasan  
*Professor*  
*Department of ISE, RVCE*  
*Bengaluru, India.*

**Abstract**—Stroke is a brain attack, which cuts off vital blood flow and oxygen to the brain. Stroke is one of the reasons of death in India. The government of India is focusing on fields like early diagnosis, infrastructure, public awareness and capacity building at different levels of health care for all the NCD (non-communicable diseases) including stroke. This paper aims to implement how K-Means clustering algorithm is applied on CT (Computed Tomography) images of stroke affected human brain to detect the stroke affected region and then to calculate the area of that stroke affected region.

**Keywords**—Brain, Stroke, CT image, K-means clustering algorithm.

## I. INTRODUCTION

People utilize their brains and their eyes to see and outwardly sense their general surroundings. Computer vision is the branch of science that aims to give better capability to a machine or computer.

Computer vision is an interdisciplinary field make use of digital videos and digital images to gain deep and high-level understanding using computers. Here, understanding is nothing but the transformation of images caught by eyes into depictions of the world that can interface with other thought processes and bring out appropriate action. Clinical diagnosis and treatment planning is done by radiologist depending on the observation made using Computed Tomographic (CT) images or Magnetic Resonance Images (MRI) and doctors use computer to assist them. [10]

In medical imaging, segmentation plays a vital role. The accurate detection and diagnosis depends on the segmentation. [9] There are different segmentation techniques like thresholding, k-means clustering algorithm, histogram based method, edge detection, dual-clustering method, region growing method and many more. In this paper, the technique

used for segmenting brain image is by k-means clustering algorithm. MATLAB is used as the developing tool. MATLAB permits framework controls, plotting of capacities and information, execution of calculations, formation of UIs, and interfacing with projects written in different dialects, including C, C++, C#, Java, Fortran and Python.

## II. RELATED WORK

Computer aided method for detecting and segmenting the tumor from brain MR image is done using two algorithms and they are k-means clustering and fuzzy c-mean algorithm. The tumor area is calculated and also the stage of tumor is identified. [1]

Features derived from wavelet domain and intensity enhancement method are used to detect and classify stroke automatically using two-level classification scheme. [2]

Dzulkifli Bin Mohammad and M. Masroor Ahmed explains how tumor is extracted and segmented using k-means clustering algorithm from the affected images combining with Perona-Malik Anisotropic Diffusion Model. [3]


S.MaryPraveena and Dr. IlaVennila explains how image clustering and segmentation is done base on image pixels using K-means algorithm and image segmentation is done using the Optimization Fusion Approach. [4]

Threshold value will be selected. If the pixel value in the image is less than the threshold then it is replaced with the black pixel or with the white pixel. Segmentation of the stroke region from MR images is done by thresholding technique. [7]

Thresholding can also be used to create binary image from gray scale image. This method some time ignores the stroke cells also, so thresholding is not recommended. [8]

### III. PROPOSED METHOD


The proposed technique comprises of five phases: acquisition of images, preprocessing the input image by removing noises, segmentation of affected region, extracting features from segmented region and finally calculating the area of affected region. Image acquisition is a phase in which the images which are fed as input the system are collected from various sources, in our case hospitals and scan centers are the sources. The image collected will not be in the required form so preprocessing phase is needed. Then the region of interest is identified and segmented from the background. In this paper k-means clustering algorithm is used for segmentation process. The required features are extracted in feature extraction phase. In the last phase i.e., area calculation phase the area of the stroke affected part is calculated. Block diagram of proposed system is shown in below figure 1.

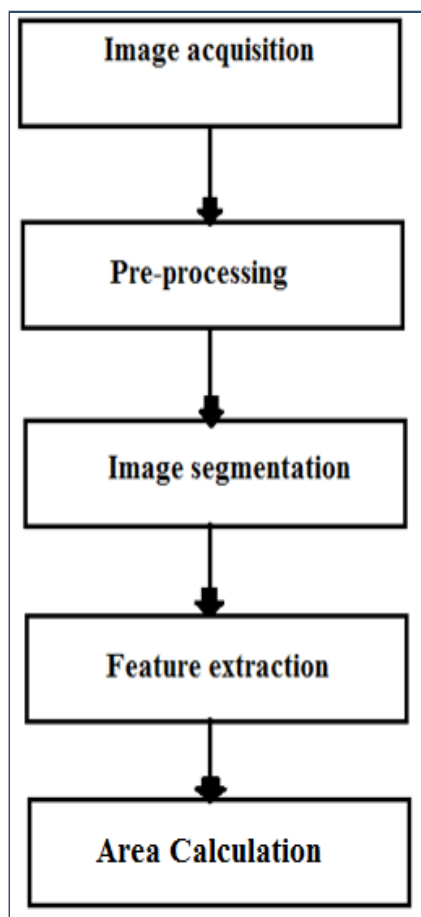

**Figure 1: Block diagram of proposed method.**

#### A. Image Acquisition

Image acquisition as the name says, it is collection of images from different sources like hospitals and scan centers. These images are fed as input to the system. Many problems were encountered while collecting the images. Hospitals maintain secrecy of their patient's data. So hospitals will not agree to share the data with outsiders. Figure 1 shows the sample input images collected.

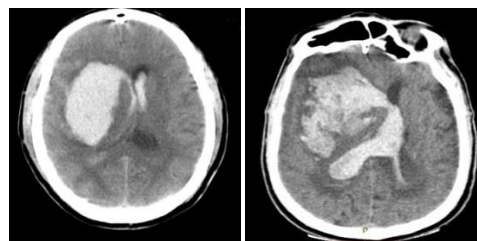

**Figure 2: Sample input images.**

#### B. Preprocessing

The collected images will not be in the required format, so the preprocessing of those images becomes necessary. The images are converted from RGB to gray scale using `rgb2gray()`. GIMP Tool is used to remove the skull portion of the brain which is not required in further phases.

#### C. Image Segmentation

Image Segmentation plays a very important role in medical imaging. By using image segmentation process on medical images, the diagnosis of the affected region is made easy and this also helps in treatment planning. [3]

There are many techniques for segmenting the region of interest (RoI) and they are: thresholding, k-means clustering algorithm, histogram based method, edge detection, dual-clustering method, region growing method and many more.

In this proposed paper k-means clustering algorithm is used for segmentation. It is the least difficult unsupervised learning method. Cluster value  $k$  is given in random. Trial and error method is used while choosing  $k$  till proper clustering is done. Depending on the type of image whether it is CT image or MR image  $k$  value varies. [5][6]

##### a. ALGORITHM

1. Give the number of cluster value as  $k$ .
2. Pick the centers of  $k$  clusters arbitrarily.
3. Calculate midpoint (center) of the cluster.
4. The distance between every pixel to center of every cluster is calculated.
5. The pixel is moved to the cluster to which calculated distance is minimum.
6. Or else move the pixel to next cluster.
7. Re-calculate the center.
8. Repeat the whole process until the center of the cluster do no change.

Figure 3 shows the flowchart of k-means clustering algorithm. It shows how the number of clusters is chosen, the distance of each pixel to every cluster is calculated and the pixel is added to that cluster to which distance is minimum. Repeat this process until the cluster's center doesn't move.

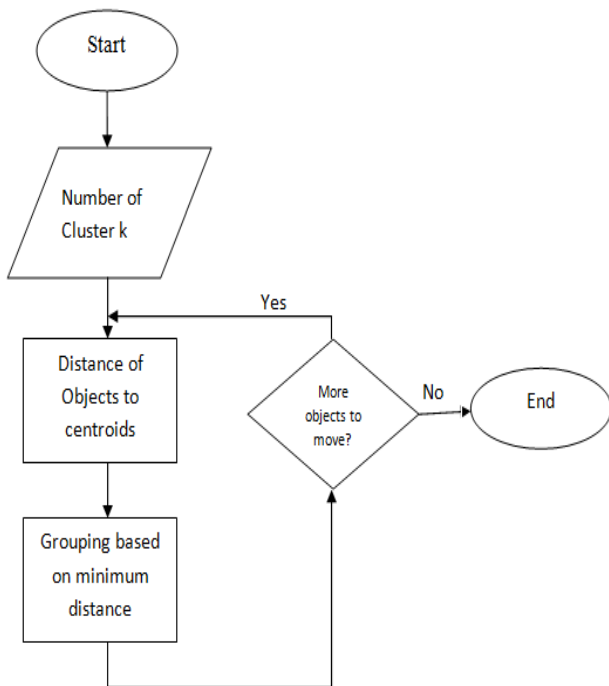


Figure 3: Flowchart of k-means clustering algorithm.

Figure 4 shows the subplots after segmenting the clustered image. Each subplot represents four clusters.

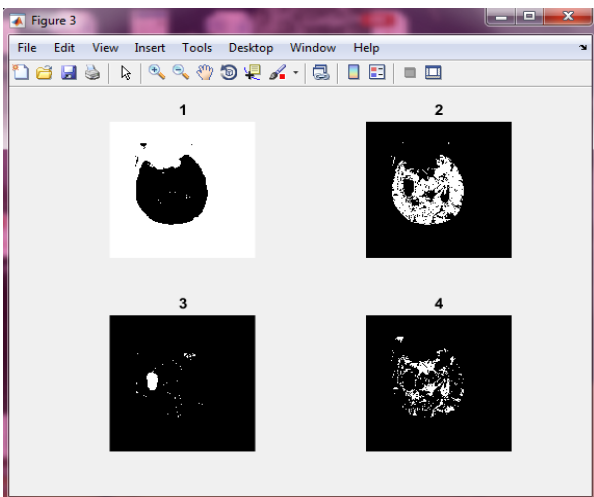


Figure 4: Output image of k-means.

D. Feature Extraction And Area Calculation.

In feature extraction phase, the features which are required for further phases are extracted. Here pixel values are needed to calculate the area so the pixel values are extracted, then the area of the stroke affected region is calculated and the same is displayed in command window along with number of the subplot to which the affected region belong. The stroke affected region is shown in figure 5.

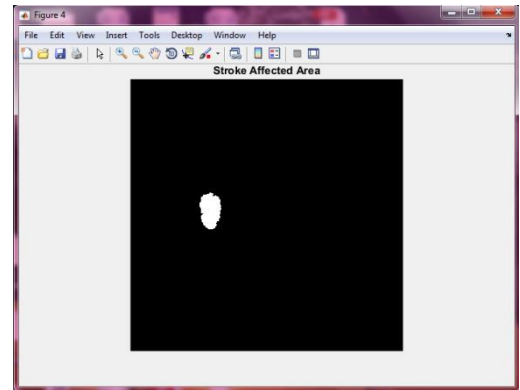


Figure 5: The stroke affected region.

Mathematical Representation:

$$511 \ 511$$

$$\text{Image, } I = \sum_{w=0}^W \sum_{h=0}^H [f(0) + f(1)]$$

$$\text{Pixel} = W \times H = 512 \times 512$$

$$W = \text{Width}$$

$$h = \text{Height}$$

$$f(0) = \text{white pixel}$$

$$f(1) = \text{black pixel}$$

$$511 \ 511$$

$$\text{Number of white pixels } P = \sum_{w=0}^W \sum_{h=0}^H [f(0)]$$

Where,

$$1 \text{ pixel} = 0.264 \text{mm}$$

$$P = \text{Number of white pixels}$$

Area Calculation of stroke region:

$$S = [(\sqrt{P}) * 0.264] \text{ mm}^2$$


Where,

$$S = \text{Stroke size}$$

IV. RESULTS AND DISCUSSION

The acquired input image is fed to the system. That image is preprocessed and k-means algorithm is used. In this method, first the preprocessed image is clustered into k (predefined value) clusters. Later image segmentation takes place according to the clusters which are done in previous step and segmented images are displayed in subplots. The subplot

number in which stroke affected region is present is displayed in command window along with the area of that stroke affected region which is the final output as shown in below figure 6.

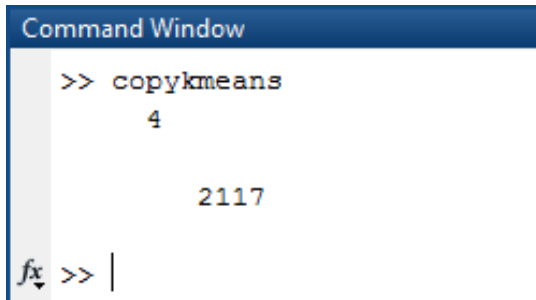

**Figure 6: This image shows the final output displayed in command window.**

The numbers of input images given for testing are 42. Among them area of 38 images are calculated correctly and 4 images shows the wrong output. So the accuracy of the project is 90.47% which is shown in Table 1.

**Table 1: This table shows the number of input images, correct detection and wrong detection.**

Images	Total number of input images	Correct Detection	Wrong Detection
Hemorrhagic CT Brain Images	42	38	4

V. CONCLUSION

The method used in this paper, detects the stroke affected region and the area of that affected region is calculated. The input image is preprocessed and then K- Means clustering algorithm, which is unsupervised learning method, is used to cluster the input image and segment the affected region. The area of the affected region is then calculated and displayed on the command window. The accuracy of the project is 90.47%.

REFERENCES

- [1] J.selvakumar, A.Lakshmi, T.Arivoli., “Brain Tumor Segmentation and Its Area Calculation in Brain MR Images using K-Mean Clustering and Fuzzy C-Mean Algorithm” IEEE-International Conference On Advances In Engineering, Science And Management (ICAESM -2012) March 30, 31, 2012.
- [2] Mayank Chawla, Saurabh Sharma, Jayanthi Sivaswamy, Kishore L.T, “A method for automatic detection and classification of stroke from brain CT images” 31st Annual International Conference of the IEEE EMBS Minneapolis, Minnesota, USA, September 2-6, 2009.
- [3] M. Masroor Ahmed & Dzulkifli Bin Mohammad(2010), "Segmentation of Brain MR Images for Tumor Extraction by Combining Kmeans Clustering and Perona-Malik Anisotropic Diffusion Model," International Journal of Image Processing, Volume (2) : Issue(I) 27.
- [4] S.Mary Praveena, Dr.IIaVennila , June 2010, "Optimization Fusion Approach for Image Segmentation Using K-Means Algorithm," International Journal of Computer Applications (0975 - 8887) Volume 2 - NO.7.
- [5] Tse-Wei Chen , Yi-Ling Chen , Shao-Yi Chien (2010), "Fast Image Segmentation Based on K-Means Clustering with Histograms in HSV Color Space" Journal of Scientific Research ISSN I452-2I6X Vol. 44 No.2, pp.337-35 I.
- [6] Anil Z Chitade (2010j) , " Colour based image segmentation using kmeans clustering," International Journal of Engineering Science and Technology Vol. 2(10), 5319-5325.
- [7] Abdulrahman Alhawaimil, “Segmentation of Brain Stroke Image” International Journal of Advanced Research in Computer and Communication Engineering Vol. 4, Issue 9, September 2015.
- [8] Yadav, M.K.K.a.S., “Brain Tumor Detection and Segmentation Using Histogram Thresholding”. International Journal of Engineering and Advanced Technology (IJEAT), April 2012. 1: p.4.
- [9] Nameirakpam Dhanachandra, Khumanthem Manglem and Yambem Jina Chanu, “Image Segmentation using K-means Clustering Algorithm and Subtractive Clustering Algorithm”, Eleventh International Multi-Conference on Information Processing-2015 (IMCIP-2015).
- [10] Alan Jose, S. Ravi and M. Sambath, “Brain Tumor Segmentation using K-means Clustering and Fuzzy C-means Algorithm and its Area Calculation”. In International Journal of Innovative Research in Computer and Communication Engineering, vol. 2, issue 2, March (2014).