
## AGUILARS CORPORATION

4301 DENVER STREET, EVANS CO 80620 (970)330-7086, FAX (970)330-7171

SAND & OIL SEPERATOR-- TWO COMPARTMENT

NOTES:
ALL REINFORCMENT ON
LID IS #5 REBAR AT 8" O.C.
EACH WAY
ALL REINFORCMENT ON
6" WALLS & 6" FLOORS
IS #4 REBAR AT 12"O.C.
EACH WAY
FOR H-20 LOADING ON LID
PROVIDE: #6 REBAR AT
8" O.C. EACH WAY

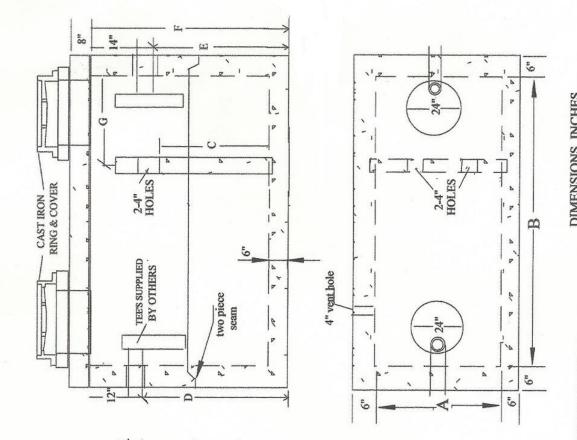

Note

Two piece tanks require customer to have equipment on site large enough to set, We will only deliver

	Control of the last of the las			D	MILL	DIMENSION INCHES		いに
	water capacity	SAND capacity	A	В	C	Ω	ы	124
	330	45 cubic ft.	48	72	22	30	28	42
ONE PIECE	510	68 cubic ft.	48	72	34	42	40	54
0.00	800	107 cubic ft.	48	96	40	48	46	09
IANKS	1070	143 cubic ft.	09	102	40	48	46	09
	1260	168 cubic ft.	09	120	40	48	46	09
TWO PIECE	1510	202cubic ft.	72	120	40	54	52	99
TANTENT	1820	244 cubic ft.	72	144	40	54	52	99
TANKS	2000	280 CUBIC FT.	72	144	50	99	64	78
	2500	320 CUBIC FT.	72	144	.64	72	70	84
	3000	320 CUBIC FT	72	144	89	76	74	88

24

O

24

36

48

48

48

48

48

revised - 2/28/2013