

EAST HUNTINGDON TOWNSHIP  
WESTMORELAND COUNTY, PENNSYLVANIA

SEWER CONNECTION REGULATIONS

Each owner or owners of a property in the Township accommodated by a Township public sanitary sewer line and having a building thereon within 150 feet of said Township's Sewer System shall connect, at his own expense, such building to said Township's Sewer System within sixty (60) days immediately following the service of the Township's notice to such owner or owners to make such connection.

If the owner of any occupied building in the Township neglects or refuses to comply with the provisions of this article or the written notice to connect to said system the Township may perform or cause to be performed such work and labor, and furnish or cause to be furnished such material as may be necessary to comply with the provisions of this article at the cost and expense of such owner together with ten percent additional thereof, and all charges and expenses incident thereto. Such sum shall be collected from such owner for the use of the Township as debts are by law collectible, or the Township may, by its proper officer or agent, file a municipal claim or lien therefor against such premises as provided by law.

No unauthorized person shall uncover, make any connections with or opening into, use, alter or disturb the Sewer System without first obtaining a written sewer connection permit. Owners of premises desiring or required to connect with the Sewer System shall first make application therefore in writing to the Township or its duly appointed agent for such purposes.

All costs and expenses incident to the installation of the sewer connection and connection of the premises with the Sewer System shall be borne by the owner or owners of the premises. The owner or owners shall indemnify and save harmless the Township from any loss or damage directly or indirectly caused by or arising out of such installation and connection.

A separate sewer connection shall be provided for every principal building, except that when a building stands at the rear of another and no separate connection to the Sewer System can be made through an adjoining alley, court yard or driveway, the sewer connection from the front building may be extended to the rear building upon written approval of the Township or its duly appointed agent for such purpose.

All sewer connections, materials therefore, joining or joint materials and methods used, shall at all times be subject the direction, supervision and approval of the Township or its duly appointed agent for such purpose.

All building connections hereafter installed shall be constructed in accordance with the East Huntingdon Township Service Sewer Detail. PVC having an SDR of 35 or less with solvent weld joints or gasket joints or ABS Schedule 40 solid wall with a solvent weld joints. Any of the above

EAST HUNTINGDON TOWNSHIP  
WESTMORELAND COUNTY, PENNSYLVANIA

SEWER CONNECTION REGULATIONS  
(continued)

must be laid in accordance with manufacturers' requirements. All pipe shall conform with Applicable A.S.T.M. Specifications for conditions encountered. All pipe must be laid with at least six inches of granulated material between pipe and boulder or rock strata. All pipe shall be laid with a minimum grade of 1/8 inch per foot and have water tight and gas tight joints.


No person or persons shall connect with the Township's Sewer System other than through, by or into "Y's" and "T"'s in the Sewer System without a special sewer connection permit and the designation of the location of the "Y"'s and "T"'s by the Township or its duly appointed agent for such purpose. No person shall drill into or tap any of the Township's Sewer System without written permission from the Township or its duly appointed agent for such purpose.

The Owner or Owners holding sewer connection permits shall notify the Township Engineer or designated agent when the sewer connection is ready for inspection and connection with the Sewer System. In no case shall backfill be placed until such inspection has been made.

All excavations for sewer connections shall be adequately guarded with barricades and lights to protect the public from hazards. All streets, sidewalks, and public property, disturbed in the course of making a sewer connection, shall be restored in a manner satisfactory to the Township or its duly appointed agent for such purpose.

After sixty (60) days have lapsed since the owner or owners received notice to connect with the Sewer System as above provided, the owner or owners shall forthwith abandon all privies, cesspools, sinkholes, septic tanks and other receptacles on premises for receiving sewage and/or industrial wastes, or at any time thereafter to erect, construct, use or maintain any pipe, conduit, drain or other facility for the discharge of sewage and/or industrial wastes except in the Sewer System, and all privy vaults or cesspools or similar receptacles for human excrement shall be cleansed and filled under the direction of the Township or its duly appointed agent for such purpose, and no connection shall be permitted from any privy vault or cesspool to the Sewer System.

No owner shall discharge or permit the discharge of any storm water, surface water, roof runoff, subsurface drainage, cooling water or unpolluted industrial process waters into the Township's Sewer System.

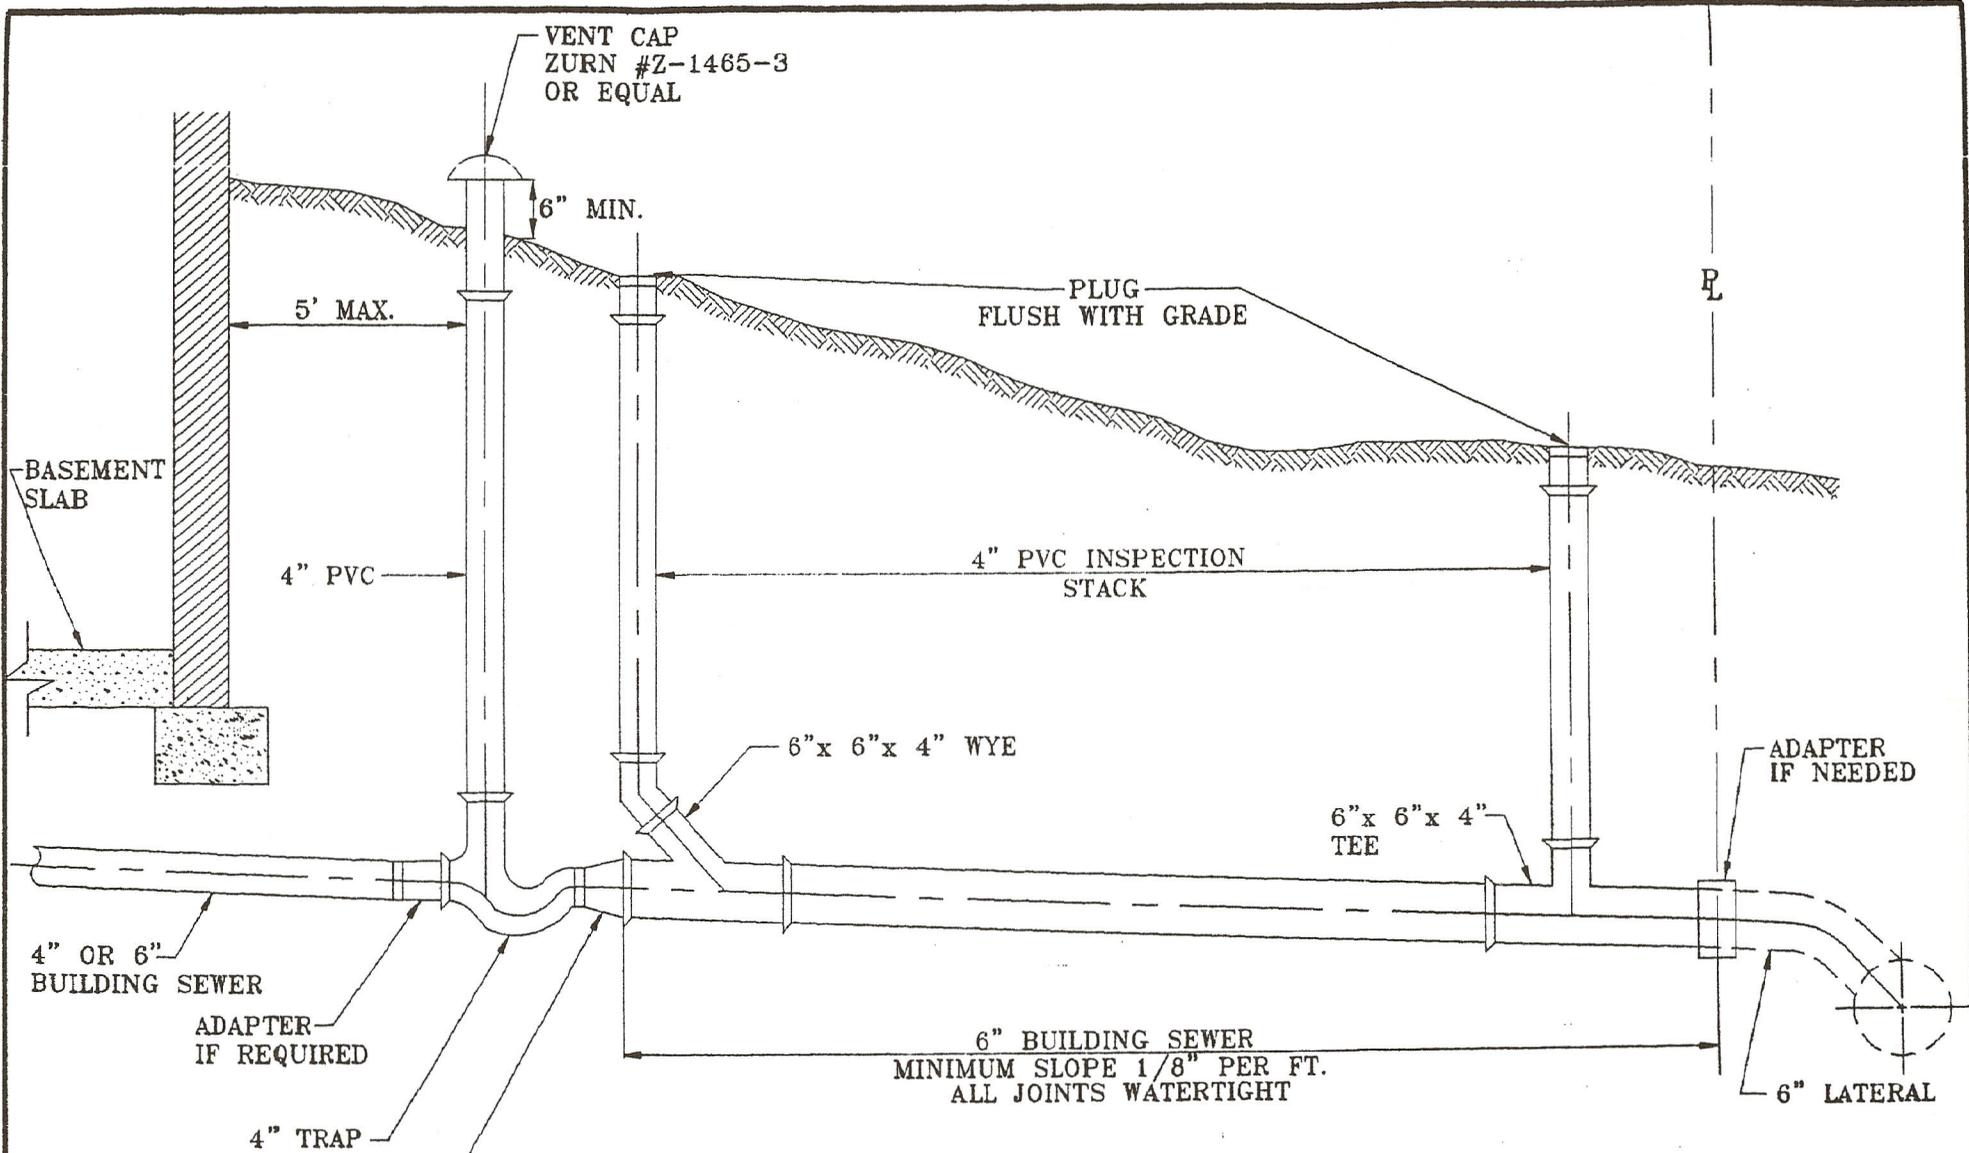

- NOTE:
1. STACKS ARE NOT PERMITTED IN AREAS SUBJECT TO FLOODING OR PONDING.
  2. PERFORATED CAPS ARE NOT PERMITTED.
  3. PVC AND ABS PIPE REQUIRE 2B STONE TO THE TOP OF PIPE. THIS MUST BE PLACED BY HAND AND TAMPED.
  4. INSPECTION STACKS AND PLUGS ARE TO BE CAST IRON IF SUBJECT TO VEHICLE TRAFFIC.
  5. TRAP MAY BE CONSTRUCTED OF FITTINGS MEETING THE SAME SPECIFICATIONS AS THE LATERAL PIPE.

**EAST HUNTINGDON TOWNSHIP  
SERVICE SEWER DETAIL**