

Survey Paper

Cost-Effective Vehicle Type based Smart Parking System Over Deep Neural Network

Rushikesh Sutar¹, Vidhya Lokhande², Pravin Bhujbale³, Deepali Kulkarni⁴, Prof. S.S.Khartad⁵

^{1,2,3,4} Student, ⁵Assistant Professor, Department of Information Technology,
SKN Sinhgad Technical Institute of Technology and Science, Lonavala, Pune, Maharashtra, India.

Abstract- Vehicle type recognition in surveillance images with deep learning has received important attention in various applications of intelligent transportation systems. Thus, a deep active learning method with a new query strategy which is in this implementation for vehicle type recognition in surveillance images. As the rate of people owning their vehicles increases, the need of parking slots to park vehicles also increases. But currently the scenario is that there are not sufficient parking slots available or there is also possibility that people are not now aware about the legal parking slots available in their locality. To overcome this problem, we are going to invent video based parking system.

Keywords- Active learning, deep learning, surveillance images, vehicle type recognition.

I. INTRODUCTION

This implementation aims to resolve this problem by reducing manual labelling in surveillance images, and then maximizing the effect of the few tagged data. Thus, a deep active learning method with a new query strategy which is in this implementation for vehicle type recognition in surveillance images. First, in this paper the method constructs a memory space using a large-scale fully labelled auxiliary dataset collected from the Internet. Subsequently, two metrics, the similarity measurement in memory space and the entropy, are used to simultaneously emphasize the diversity and uncertainty in the query strategy. Moreover, an additional label-consistent term apart from the hyper-parameters is used to adaptively adjust the combination of the two principles in active learning. In this paper, the method was evaluated on the Comprehensive Cars dataset. The experimental results demonstrated that the method could effectively reduce the annotation cost by up to 40% in surveillance vehicle type recognition compared with the random selection method. Recently, vehicle type recognition in surveillance images with deep learning has received important attention in various applications of intelligent transportation systems. However, annotating large-scale images from many surveillance images is tedious and time-consuming, which impedes its application in the real world.

II. LITERATURE SURVEY

Patel Parin and Gayatri Pandi [1] states Traffic Monitoring is a difficult undertaking on jam-packed streets. Traffic Monitoring methods are manual, costly, time expending and include human administrators. Huge scale stockpiling and investigation of video streams were unrealistic due to constrained accessibility. Notwithstanding, it is currently conceivable to actualize object discovery and following, conduct examination of traffic designs, number plate acknowledgment and reconnaissance on video streams created by traffic checking. In Big Data, video streams (datasets) are enormous to such an extent that average database frameworks are not ready to store and examination the datasets. Putting away and preparing huge volume of information requires adaptability, Fault Tolerance and accessibility. In this manner, Big Data and Cloud figuring are two perfect ideas as cloud empowers Big Data for traffic observing utilizing Hadoop innovation with AI calculation. Examination results are put away in Hive, which is an information stockroom based over Hadoop. This information incorporates by and large traffic speed, traffic volume, and individual vehicle speed. Hive gives information rundown, question, and investigation. To dodge the necessities of path control and sensor exhibits, we planned information driven way to deal with street traffic investigation utilizing advanced video.

Shaoqing Ren et.al[2] introducing best in class object recognition systems rely upon area proposition calculations to speculate object areas. Advances like SPPnet and Fast R-CNN have diminished the running time of these discovery systems, uncovering area proposition calculation as a bottleneck. In this work, we present a Region Proposal Network (RPN) that offers full-picture convolutional highlights with the recognition arrange, along these lines empowering almost without cost district recommendations. A RPN is a completely convolutional arrange that at the same time predicts article limits and objectness scores at each position. RPNs are prepared start to finish to create highquality district recommendations, which are utilized by Fast R-CNN for location. With a basic substituting streamlining, RPN and Fast R-CNN can be prepared to share convolutional highlights.

Jeany Son et.al [3] designed Quadruplet Convolutional Neural Networks (Quad-CNN) for multi-object following, which figure out how to partner object discoveries crosswise over edges utilizing quadruplet misfortunes. In this paper, the systems consider target appearances together with their transient adjacencies for information affiliation. In contrast to traditional positioning misfortunes, the quadruplet misfortune implements an extra imperative that makes transiently contiguous identifications more firmly situated than the ones with enormous transient holes. We likewise utilize a perform various tasks misfortune to mutually learn object affiliation and bouncing box relapse for better limitation. The entire system is prepared start to finish. For following, the objective affiliation is performed by minimax mark engendering utilizing the measurement gained from the designed system. We assess execution of our multi-object following calculation on open Witticism Challenge datasets, and accomplish extraordinary outcomes.

Ying-li Tian et.al[4] introducing the increasing need for sophisticated surveillance systems and the move to a digital infrastructure has transformed surveillance into a large scale data analysis and management challenge. Smart surveillance systems use automatic image understanding techniques to extract information from the surveillance data. While the majority of the research and commercial systems have focused on the information extraction aspect of the challenge, very few systems have explored the use of extracted information in the search, retrieval, data management and investigation context. The IBM smart surveillance system (S3) is one of the few advanced surveillance systems which provides not only the capability to automatically monitor a scene but also the capability to manage the surveillance data, perform event based retrieval, receive real time event alerts thru standard web infrastructure and extract long term statistical patterns of activity. The IBM S3 is easily customized to fit the requirements of different applications by using an open-standards based architecture for surveillance.

Tong Xiao et.al [5] states Existing individual re-recognizable proof benchmarks and techniques mostly center around coordinating trimmed passerby pictures among inquiries and competitors. Be that as it may, it is unique from genuine situations where the explanations of passerby bouncing boxes are inaccessible and the objective individual should be looked from a display of entire scene pictures. To close the hole, we designed another profound learning structure for individual pursuit. Rather than separating it into two separate undertakings—walker location and individual re-recognizable proof, we together handle the two perspectives in a solitary convolutional neural system. An Online Instance Matching (OIM) misfortune capacity is used to prepare the system viably, which is adaptable to datasets with various characters. To approve our methodology, we gather and comment on an enormous scale benchmark dataset for individual hunt. It contains 18, 184 pictures, 8, 432

personalities, and 96, 143 walker bouncing boxes. Investigations demonstrate that our system beats other separate approaches, and the OIM misfortune capacity merges a lot quicker and better than the ordinary Softmax.

Weihua Xu et.al. [6] introducing The measure of human activity video information is expanding quickly because of the development of interactive media information, which builds the issue of how to process the enormous number of human activity recordings efficiently. Along these lines, we devise a novel methodology for human activity closeness estimation in the distributed environment. The efficiency of human action similarity estimation depends on feature descriptors. Existing element descriptors, for example, Local Binary Pattern and Local Ternary Pattern can just separate surface data however can't acquire the item shape data. To determine this, we present another element descriptor; in particular Edge based Local Pattern descriptor (ELP). ELP can concentrate article shape data other than surface data and ELP can likewise manage power fluctuations. In addition, we investigate Apache Spark to perform include extraction in the disseminated condition. At long last, we present an observational adaptability assessment of the undertaking of extricating highlights from video datasets.

III. EXISTING SYSTEM APPROACH

In existing system on machine learning and smart parking techniques we come on conclusion that there is not any promising solution for pre- event identification and alert generation. All alert systems are based on sensors and hardware devices which is very expensive. Existing work on video surveillance is used recorded video sequences for crime investigation which is post investigation process. In which chances of overcome risk and loss is very less. So there is need of pre-event identification systems in video surveillance and monitoring with the addition of alert generation for better accident prevention techniques. So we are working on smart parking system for giving most promising solution over existing post methods.

IV. SYSTEM APPROACH

In this system, we are doing experiment on vehicle detection and pre-alarm generation, wrong vehicle parking detection and prevention, Smart Parking by using video surveillance.

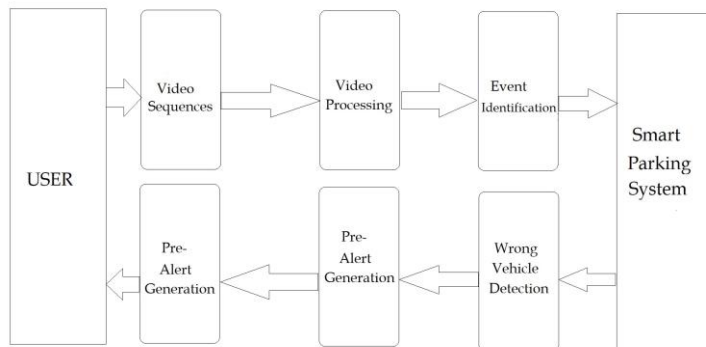


Fig.1 Block Diagram of System

In this system, we are going to overcome existing drawbacks of post investigation techniques of video surveillance systems by providing pre alert generation system. Our work is based on machine learning techniques for video analysis with better performance and vehicle detection with advantages of alert generation. We are proposing vehicle type recognition and parking management scenario. We design a new Convolutional neural network based wrong vehicle parking detection and alarm generation. We are going to solve existing parking problem by using python machine learning approach. We are going to develop following modules:

- 1.) Video processing
- 2.) Image processing
- 3.) Feature extraction
- 4.) Vehicle type detection
- 5.) Alarm generation

Main motive behind this system is to give promising solution by pre-event recognition which alternatively increases prevention of wrong vehicle parking. To intensive task of monitoring parking regions as well as explore smart parking mechanism, researchers seek the advanced computer vision algorithms to develop intelligent video based smart parking systems. In this system, vehicle detection, vehicle type recognition, vehicle tracking.

V. CONCLUSION

We are going to invent smart parking system over machine learning and CNN techniques which overcome illegal parking problem. And give best result over post-event recognition by our pre-event recognition and alert generation work. We are going to develop wrong vehicle parking and alert generation system. For future work, we can implement this technique real time CCTV based application.

VI. ACKNOWLEDGMENT

This work is supported in a smart surveillance system of any state in india. Authors are thankful to Faculty of Engineering and Technology (FET), SavitribaiPhule Pune University,Pune for providing the facility to carry out the research work.

VII. REFERENCES

- [1]. Patel Parin, Gayatri Pandi “ **Traffic Monitoring using Video Stream with Machine Learning: Based on Big Data Process with Cloud**”. International Journal of Innovations & Advancement in Computer Science 2017
- [2]. Shaoqing Ren,Kaiming He Ross Girshick Jian Sun, “**Faster R-CNN: Towards Real-Time Object Detection with Region Proposal Networks.**” International Journal of Advanced Research in Computer Engineering & Technology (IJARCET) Volume 4 Issue 3, March 2015
- [3]. Jeany Son,Mooyeol Baek,Minsu Cho,Bohyung Han “**Multi-Object Tracking with Quadruplet Convolutional Neural Networks**” Dept. of Computer Science and Engineering, POSTECH, Korea 2017
- [4]. Ying-li Tian, Lisa Brown, Arun Hampapur, Max Lu, Andrew Senior, and Chiao-fe Shu “**IBM Smart Surveillance System (S3): Event Based Video Surveillance System with an Open and Extensible Framework**” Machine Vision and Applications Journal 2017
- [5]. Tong Xiao, Shuang Li ,Bochao Wang, Liang Lin,Xiaogang Wang “**Joint Detection and Identification Feature Learning for Person Search**” The Chinese University of Hong Kong 2017
- [6]. Weihua Xu, Md Azher Uddin ID , Batjargal Dolgorsuren, Mostafijur Rahman Akhond, Kifayat Ullah Khan, Md Ibrahim Hossain and Young-Koo Lee “**Similarity Estimation for Large-Scale Human Action Video Data on Spark**” Data and Knowledge Engineering Lab 2018