# SILVERLINE

by GIULIANO AUTOMOTIVE EQUIPMENT

www.giuliano-automotive.com

**The best choice for the average tyre shop with budget goal.**

## SL21

Mid Volume · 110V-1PH

## SWING ARM TYRE CHANGER WITH DUAL ASSIST ARM FOR CAR WHEELS 10” - 26”

- Tubeless tyre bead seating system (standard)
- Sliding horizontal arm with ø 41 mm operating arm
- Spring supported operating arm
- Tyre inflation by pedal (standard)
- Fitting plastic head designed for both standardand low proffiled tyre applications
- Tabletop thickness 14MM
- Bead breaker double effect Cylinder ø 200 mm., made in aluminum
- Reinforced Chassis

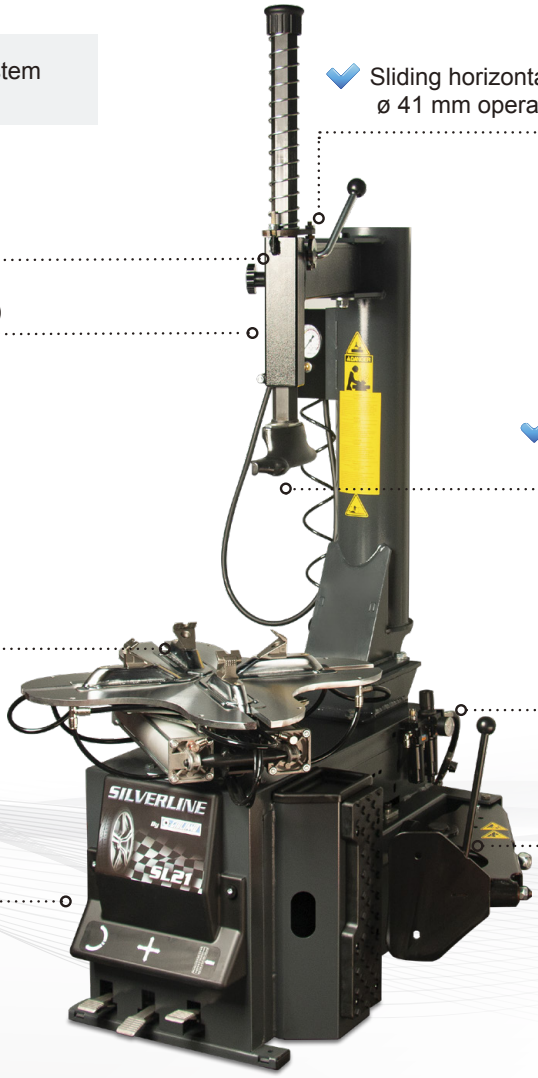

## STANDARD FEATURES

| | |
|---|---|
| Rim clamping from outside | 10” - 24” |
| Rim clamping from inside | 12” - 26” |
| Max. tyre diameter | 43” |
| Max. tyre width | 15” |
| Bead breaker cylinder force at 10 Bar | 30800 N |
| Operating pressure | 10 bar (145 Psi) |
| Power supply | 110V-1ph |
| Motor power | 0,90 KW (230V-1Ph) |
| Rotation speed | 7 - 14 rpm |
| Pre-set tyre inflating pressure | 3,5 bar (50 Psi) |
| Net weight | 300 kg |
| Max. overall dimensions | 1420x1740x2010 mm |

** By adjustable jaws*

## STANDARD ACCESSORIES

- Bead lifting lever
- Lubricator + Pressure regulator


GROUP GIULIANO

**Giuliano Industrial S.p.A: Via Guerrieri, 6 - 42015 CORREGGIO (RE) ITALY**
**Tel. +39 0522 731111 - Telefax +39 0522 633109 - E-mail: info@giuliano-automotive.com -**
**Internet: www.giuliano-automotive.com**


SILVERLINE By GIULIANO