


JT 132.8

Topless crane
Tower TH 15.2

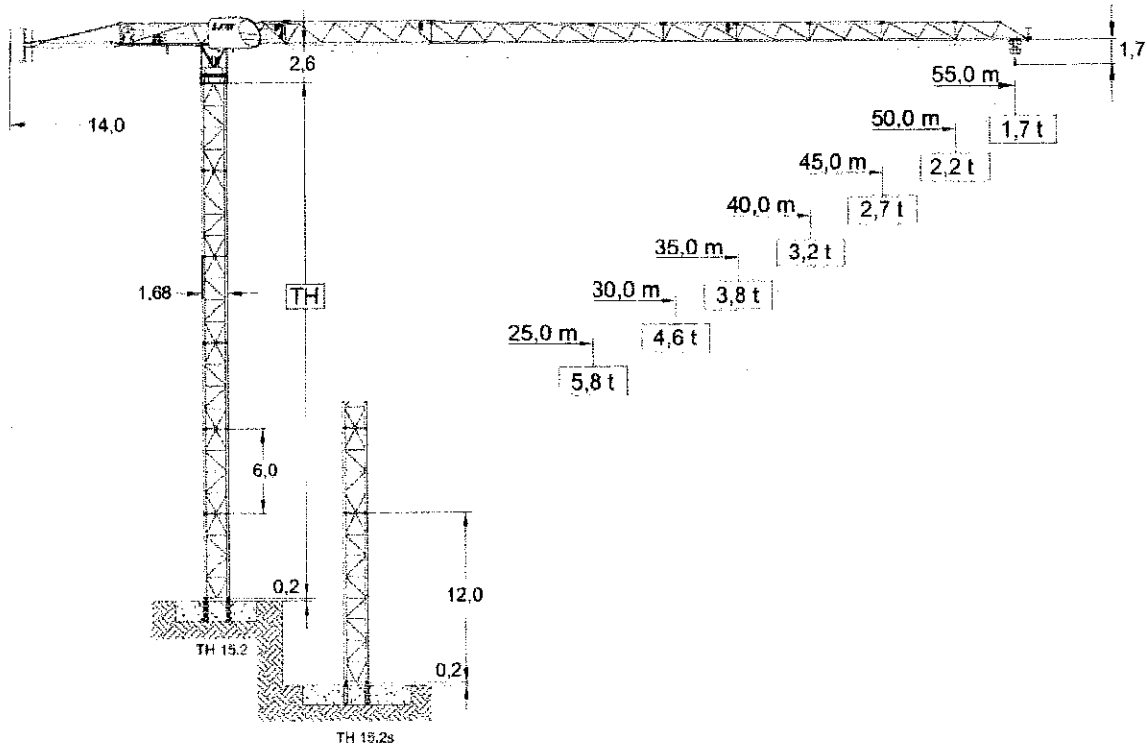

Jib length (m)		25,0 - 40,0	45,0 - 55,0
HH	TH 15.2	60,0 m	54,0 m
	TH 15.2s	66,0 m	60,0 m

Radius & Capacity													
Jib		max Load											
m	rope	t	m	18	20	25	28	30	35	40	45	50	55
55		4,0	27,0	4,00	4,00	4,00	3,83	3,54	2,95	2,52	2,18	1,92	1,70
		8,0	14,7	6,30	5,58	4,30	3,76	3,46	2,87	2,43	2,09	1,82	1,60
50		4,0	30,1	4,00	4,00	4,00	4,00	4,00	3,36	2,87	2,50	2,20	
		8,0	16,3	7,11	6,30	4,87	4,27	3,93	3,27	2,78	2,40	2,10	
45		4,0	32,1	4,00	4,00	4,00	4,00	4,00	3,62	3,10	2,70		
		8,0	17,3	7,62	6,76	5,23	4,59	4,23	3,53	3,01	2,60		
40		4,0	33,0	4,00	4,00	4,00	4,00	4,00	3,73	3,20			
		8,0	17,7	7,84	6,96	5,39	4,73	4,36	3,64	3,10			
35		4,0	33,5	4,00	4,00	4,00	4,00	4,00	3,80				
		8,0	18,0	7,96	7,06	5,48	4,80	4,43	3,70				
30		4,0	30,0	4,00	4,00	4,00	4,00	4,00	4,00				
		8,0	18,5	8,00	7,32	5,68	4,98	4,60					
25		4,0	25,0	4,00	4,00	4,00							
		8,0	18,8	8,00	7,47	5,80							

Speeds 400 V - 50 Hz / 440 V - 60 Hz							
Hoist unit 22 kW Frequency inverter							
Pmax		4,0 - 8,0 (t)					
	Load [to]	1,8	1,8	2,1	2,5	3,1	4,0
	v [m/min]	60	54	48	42	36	30
	Load [to]	3,2	3,6	4,2	5,0	6,2	8,0
	v [m/min]	30	27	24	21	18	15
Drum capacity		480,0 m					

Hoist unit 30 kW Frequency inverter							
Pmax		4,0 - 8,0 (t)					
	Load [to]	1,8	2,1	2,4	2,8	3,4	4,0
	v [m/min]	80	70	62	54	48	40
	Load [to]	3,6	4,2	4,8	5,6	6,8	8,0
	v [m/min]	40	35	31	27	24	20
Drum capacity		480,0 m					

Motor	3,0 kW FI	2 x 3,0 kW	2 x 5,0 kW
v	0,0 - 80,0 m/min	0,77 rpm	25,0 m/min
Power requirement (upper part)		Hoist 22 kW Hoist 30 kW	38 kVA 48 kVA



FEM A3
DIN 15018 H1-B3
TÜV CERT
DIN EN ISO 9001

Edition 10/06. Subject to modification.
Specifications and data not binding.

JOST Cranes GmbH
Garching Str. 26
80805 München
GERMANY

FON +49 (89) 36109-333
FAX +49 (89) 36109-334
MAIL info@jostcranes.de
WEB www.jostcranes.de