
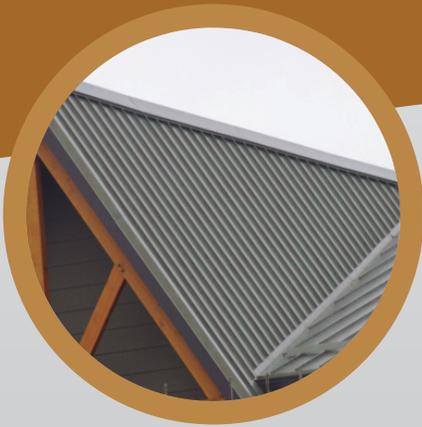


Standing Seam Panel

The JSM standing seam panel is a high end steel roofing profile. It's hidden fastener system provides a desired aesthetic appeal. Standing seam is available in 22 gauge to 26 gauge material in bare galume or a wide variety of colours.

The undisigned clip-fastening system allows for each panel to cover up the fastening of the panel laid previous, providing a fantastic looking roof that wows even the most critical judge of residential and commercial design.

Standing seam panels can be curved to further increase their appeal. Curved standing seam panels are available in 22 gauge and 24 gauge with a 1 1/2" rib height.

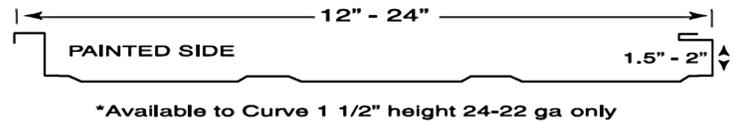

Standing Seam Application/Specifications

Use: Roof

Gauges: 26, 24, 22

Slope: 1/12 and greater

Coverage: 12" to 24" width

Length: 3' to 45'


Rib Height: 1-1/2" or 2"

Fastener System: Hidden Fastener

Recommended Substrate: Solid Substrate

Recommended Accessories

Flashing	Closures
See Flashing Section	
Fasteners	Miscellaneous
	Clips
Pancake Sharp/Tek	Hand/Power Seamer
Wafer Sharp/Tek	Butyl Tape
MG#14x__" (wood)	Roof Boots
MG#10x__" (wood)	X Seal
MD#14x__" (metal)	Metal Roof Sealant
ST#14x7/8" (laps)	Synthetic Underlayment

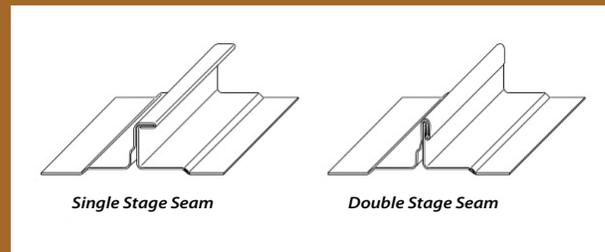

Standing seam panels can be seamed as a single stage seam or as a double stage seam, using a hand crimper or power seamer.



TF: 877-463-8256
 PH: 780-979-0325
 FAX: 780-979-8636
www.versaframe.ca