


## AmericanAirFilter FM2-LE

Self-Contained Energy Efficient Fan/Filter Modules for Cleanroom Applications

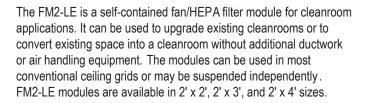


#### **Energy Efficient**

FM2-LE modules are energy efficient. Each module utilizes a rugged AC motorized impeller rated at 2.4 amps at start up and approximately 2 amps while in operation. The aluminum backward curved impeller is lightweight and has a long service life. All motors are dynamically balanced and 100% quality inspected.

#### Standard Features

- · Extruded aluminum filter cell sides
- AstroCel® II HEPA filter, 99.99% efficient on 0.3 micrometer particles, 2"-deep minipleat media pack. HEPA meets UL 586 and UL 900
- White expanded metal faceguard on the downstream side of the filter
- 16-gauge mill finish aluminum pressure housing with 4 support points for hanging
- 115V, 60Hz, single-phase, energy efficient, backward curved motorized impeller wired junction box
- · Variable speed control
- · All electrical components UL Classified
- PerfectPleat® M8 1"-deep prefilter with DuraFlex® media, MERV 8

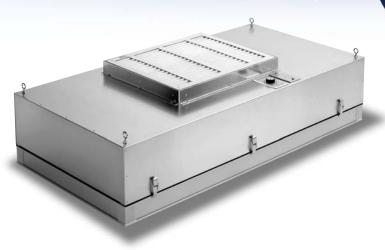

#### **Options**


- · Duct connection (10" or 12" diameter) in lieu of prefilter
- · Power cord
- · Center divider with test port in filter
- ULPA filter, 99.9995% efficient on 0.1 0.2 micrometer particles, scanned
- 3" or 4" deep HEPA or ULPA filter
- · Knife-edge filters for gel grid systems
- · 230-volt, 60-Hz motor
- · Stainless steel faceguard



Latches seal and hold the AstroCel® filter securely to the module.

# American Air Filter

### FM2-LE Fan/Filter Module

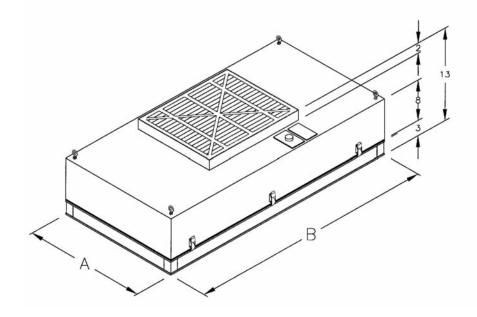

#### **Product Information**

Part	Dimensions (inches)		Unit Installed	Unit Shipping
Number	Α	В	Weight (lbs.)	Weight (lbs.)
3010352-002	235/8	235/8	26	30
3010345-002	235/8	355/8	40	50
3010337-002	235/8	475/8	53	60



