


## Product data sheet

# TERRA SPIKE® XF

**Deep aerification and relief of compaction down to a depth of 8 ½", at travel speeds up to 3.5 mph.**

The new generation of TERRA SPIKE® XF deep aerifiers by Wiedenmann has revolutionized turf care and set new standards with regard to speed, productivity and quality of work. Aerify and loosen your turfs down to a depth of 8 ½" at travel speeds up to 3.5 mph. Save up to 60 % of the time you previously spent carrying out this maintenance work.

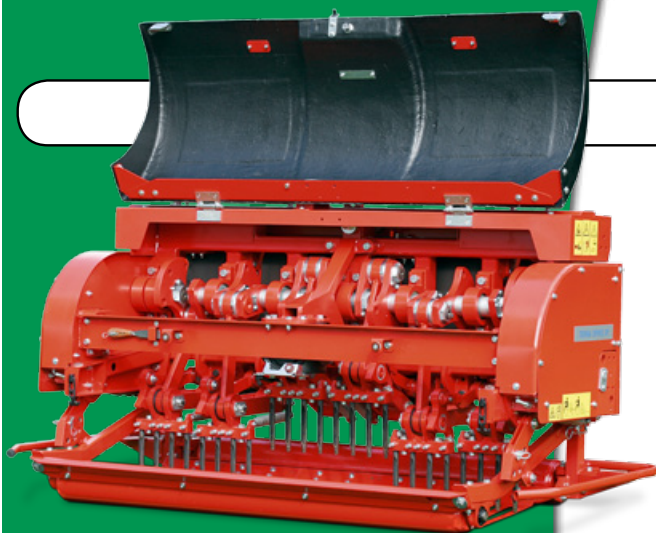

### TECHNICAL DATA

### TERRA SPIKE® XF

Model:	XF 6	XF 8	
Working width in inches:	63"	83"	
Weight in lbs. (approx.):	2359	2810	
Maximum working depth in inches:	8 ½"	8 ½"	
Dimensions L / W / H in inches (approx.):	53" / 85" / 48"	53" / 104" / 48"	
Mounting:	rear three point cat. I and II		
QuickSet / QuickFit / PowerPack / VibraStop:	standard		
Minimum required tractor power (recommended):	32 HP	42 HP	
Crankshaft speed:	345 RPM.	410 RPM.	485 RPM.
Maximum admissible tractor power:	60 HP	70 HP	80 HP
Minimum tractor lifting capacity with standard attachment in lbs.:	3064	3726	
Tractor PTO speed:	540 RPM		
Solid tines Ø in inches:	3/16", 5/16", 1/2", 3/4"		
Hollow tines Ø in inches:	1/2", 5/8", 3/4", 1"		
Rear roller:	standard		
Turf retainer:	optional		
Hydraulic depth adjustment:	optional		
Swath board:	optional		
Hydraulic rotary brush:	optional		
Multi-tine holder for 3/16" and 5/16" solid tines:	optional		

### Area coverage in continuous operation in square feet per hour at a crankshaft speed of:

345 RPM; at 0.8 mph; square hole spacing 2 ½": (approx.):	22604 sq.ft./hr	30139 sq.ft./hr
345 RPM; at 1.7 mph; square hole spacing 5": (approx.):	45208 sq.ft./hr	60278 sq.ft./hr
345 RPM; at 2.5 mph; square hole spacing 7 ½": (approx.):	67813 sq.ft./hr	90417 sq.ft./hr
410 RPM; at 1.0 mph; square hole spacing 2 ½": (approx.):	26910 sq.ft./hr	36597 sq.ft./hr
410 RPM; at 2.0 mph; square hole spacing 5": (approx.):	53820 sq.ft./hr	72118 sq.ft./hr
410 RPM; at 3.0 mph; square hole spacing 7 ½": (approx.):	80729 sq.ft./hr	107639 sq.ft./hr
485 RPM; at 1.2 mph; square hole spacing 2 ½": (approx.):	32292 sq.ft./hr	43056 sq.ft./hr
485 RPM; at 2.35 mph; square hole spacing 5": (approx.):	63507 sq.ft./hr	85035 sq.ft./hr
485 RPM; at 3.55 mph; square hole spacing 7 ½": (approx.):	95799 sq.ft./hr	127014 sq.ft./hr

Descriptions and illustrations are non-binding. We reserve the right to modify the construction and design.

