



## MAKING A HOUSE YOUR HOME

Finding ways to reflect your style, your taste and your way of living is truly what turns a house into your very own home. Little details, like the way a well-crafted door feels when it opens and closes, create a sense of well-being in subtle but important ways. Families everywhere rely on JELD-WEN for many of these important details: the energy efficiency of their windows, the safety and security of their front doors, and the steadfast performance of all wproducts, including those inside.

## RELIABILITY FOR REAL LIFE

JELD-WEN materials and craftsmanship represent enduring quality. Solid and familiar, just the way you like it. And whether your home is completely contemporary or a traditional colonial, choosing well will always mean looking to a trusted source—JELD-WEN.

REFLECT YOUR STYLE



For the complete line of JELD-WEN® windows and doors, visit us online at [www.jeld-wen.com](http://www.jeld-wen.com).



Each one of our windows and patio doors is built to last. We prove this by supporting each product with our lifetime limited warranty.

# REDUCE SOUND—INCREASE FIRE RATINGS



ProCore solid core construction is available with all our Molded and Flush doors.

This solid core door reduces the transmission of sound by up to 50 percent (compared to a hollow flush door). Furthermore, this option helps prevent the dents and dings of daily life.



Our 1-3/4" doors are also available with 20-minute, 45-minute and 60-minute fire ratings. For true fire protection and solid safety, these doors must be teamed with certified frames and hardware.

The core, or the materials used inside the door, affects the weight of the door, its ability to withstand impact, its fire rating and even sound transmission.

Solid Particleboard Core: Combination Wood/MDF or All-Wood Frame

Wide Stile with Solid Particleboard Core: Wood Frame



# TABLE OF CONTENTS



## Table of Contents

ProCore-The Quiet Door® .....	4	Prefinished Molded Doors .....	18
<b>Molded Doors</b>		Molded Commercial Wide Stile Doors .....	19
Craftsman III™ .....	6	Molded Door Designs .....	20
Cambridge .....	7	Molded Door Construction .....	21
Camden® & Princeton .....	8	<b>Flush Doors</b>	
Continental™ .....	9	Flush Door Designs .....	22
Santa Fe .....	10	Flush Door Construction .....	23
Avalon® .....	11	Molded Door Size and Profile Options .....	24
Atherton® & Stanford .....	12	6'8" and 7'0" Doors .....	25
Provincial® .....	13	8'0" Doors .....	33
Rockport™ .....	14	8'0" and Bifold Doors .....	36
Arlington .....	15	Warranty .....	37
Bostonian®, Colonial & Bristol .....	16	About JELD-WEN® .....	38
Impression™ Mirror .....	17		



## CRAFTSMAN III™

Our Craftsman III doors reflect the unadorned, aesthetically balanced design created over a century ago. These doors are the perfect choice for traditional homes. Their clean, geometric lines also make them increasingly popular with contemporary style homes.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**JELD-WEN Exclusive**  
 Craftsman sticking  
 with Flat Panels



## CAMBRIDGE

With its simple, straight lines, this two-panel Molded interior door is a natural with almost any interior architecture, contemporary or traditional. The Cambridge has an ovolo sticking profile and a smooth surface.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**Cambridge - Smooth**  
 Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Passage



Narrow



Bifold



Passage



Narrow



Bifold



8'0" Passage

## CAMDEN® & PRINCETON

The Camden and Princeton doors have classic design profiles that make them beautiful in homes that are more traditional in their architecture. These two-panel doors with a modified cove and bead sticking profile are identical in every way with the exception of surface—the Camden has a woodgrain surface; the Princeton has a smooth surface.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**Princeton - Smooth**  
 Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



**Camden - Woodgrain**  
 JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.

## CONTINENTAL™

As its name would suggest, the Continental is reminiscent of classic European architecture and lends itself well to homes that are more traditional in style. This is a two-panel door with an ovolo sticking profile and a smooth surface.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**Continental - Smooth**  
 Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Passage



Narrow



Bifold



8'0" Passage



Passage



Narrow



Bifold



8'0" Passage



## SANTA FE

Designed with the architectural warmth of a planked, solid wood door, the Santa Fe offers you the strength and affordability of a Molded interior door. It has a smooth surface with ovolo sticking and is ready to be painted.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**Santa Fe - Smooth**  
 Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



## AVALON®

The Avalon, with its straight-lined, three-panel format, can adapt as easily to a contemporary home as it can to one with more traditional design roots. The Avalon offers a modified cove and bead sticking profile, and comes with a woodgrain surface.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**Avalon - Woodgrain**  
 JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.



Passage



Narrow



Bifold



8'0" Passage



Passage



Narrow



Bifold

## ATHERTON® & STANFORD®

Distinguished by the beautiful simplicity of a four-panel design and ovolo sticking profile, the Atherton and Stanford Molded interior doors adapt comfortably to almost any interior environment. The Atherton has a smooth surface; the Stanford has woodgrain.

Available with



**Atherton - Smooth**  
Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.




**Stanford - Woodgrain**  
JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.

## PROVINCIAL®

This four-panel door with its woodgrain surface and ovolo sticking profile is designed to work with classic architectural styles of virtually every description.

Available with



**Provincial - Woodgrain**  
JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.



Passage



Narrow



Bifold



8'0" Passage



Passage



Narrow



Bifold



## ROCKPORT™

With all the classic charm of a bygone era, it's truly one of a kind. Its smooth surface and modified cove and bead sticking profile add traditional warmth to any room.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**Rockport - Smooth**  
 Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



## ARLINGTON

With its handsome beaded sticking profile, the Arlington is the first Molded interior door with double-hip raised panels—a premium look at an affordable price.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**Arlington- Smooth**  
 Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



Passage



Narrow



Bifold



8'0" Passage



Passage



Narrow



Bifold



8'0" Passage



## BOSTONIAN®, COLONIAL & BRISTOL

These six-panel doors are perfectly suited to the classic American architecture of so many homes. The Colonial has a woodgrain surface with an ovolo sticking profile; the Bostonian has a woodgrain surface with a modified cove and bead sticking profile; and the Bristol has a smooth surface and modified cove and bead sticking profile.

Available with  
**PROCORE**  
THE QUIET DOOR®



**Bristol - Smooth**  
Our smooth surface doors let you give your home a streamlined, contemporary feeling. They feature the look of painted wood doors.



**Bostonian, Colonial - Woodgrain**  
JELD-WEN® interior doors with woodgrain surfaces emulate the look of solid wood doors.



## IMPRESSION™ MIRROR

The Impression mirror door casts daylight throughout your whole room, so it becomes brighter and appears larger. At night, it will reflect the glow of your table lamps and other ambient light to add a warm, comforting touch.

One side of the door has a beveled mirror with a protective film for easy painting, the other features your choice of any of our 4 or 6 panel designs.



**The Impression mirror door** is built with special adhesives, eliminating the need for a clunky lip moulding to hold the mirror on the door's surface. This way, all you see is the perfectly beveled edge of the mirror. This door complies with ANSI Z97.1 Safety Requirements.



Passage



Narrow



Bifold



8'0" Passage

Side A




Beveled Mirror

Side B



Provincial  
Atherton, Stanford  
Colonial, Bostonian, Bristol  
Arlington

You can easily accommodate an Impression door in any space:

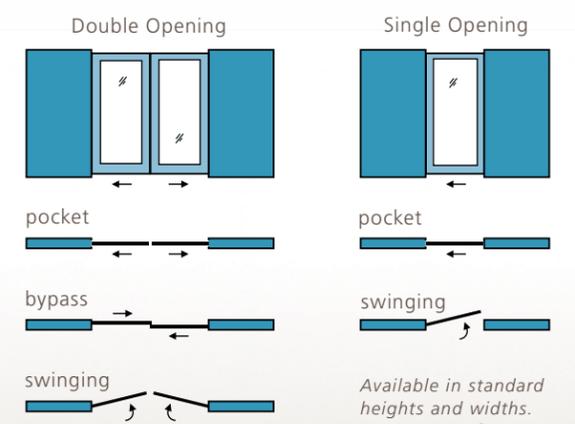

Available in standard heights and widths. See page 29 for specifications.

## PREFINISHED MOLDED DOORS

The absolute simplicity of having your doors stained, finished and ready to be installed upon arrival is a real advantage, especially when you're on a tight timeline.

This JELD-WEN line of six-panel, prefinished doors comes to you in your choice of several warm wood tones, providing both depth and texture to your home's interior. Every prefinished passage and bifold door is available in widths from 1'0" to 3'0".

Available with  
**PROCORE**  
 THE QUIET DOOR®



Prefinished 6-Panel



Due to the natural characteristics inherent to wood products and primers, JELD-WEN® prefinished interior doors will have some degree of variation in color tone. While we take careful measures to maintain consistency, some color fluctuation is to be expected.

**Prefinished Stains**  
 (availability may vary by region)



Imperial Oak

**Prefinished Paint**  
 (availability may vary by region)



Prefinished White

## MOLDED COMMERCIAL WIDE STILE DOORS

Rely on JELD-WEN® to come through as a trusted source for meeting your very specific, larger scale interior door requirements. Our wide stile doors are so solid and dependable, you'll find them used in hospitality and residential venues of virtually every description.

These doors are designed to accommodate commercial-grade, self-closing hardware on the top rail, a kick plate on the bottom rail and a variety of panic bar options. Extra-wide stiles make it possible to install a variety of commercial locking systems, including card key locks.

JELD-WEN wide stile doors have a 20-, 45- or 60-minute fire rating; doors 6'8" and higher are ADA-compliant.

Available with  
**PROCORE**  
 THE QUIET DOOR®



**Continental™**  
 Commercial Wide Stile  
 Smooth surface  
 Ovolo sticking profile



**Colonial**  
 Commercial Wide Stile  
 Woodgrain surface  
 Ovolo sticking profile



**Arlington**  
 Commercial Wide Stile  
 Smooth surface  
 Beaded sticking profile

*Variances in photography and printing may cause the finish colors shown in this catalog to differ from actual finishes.*

# MOLDED DOOR DESIGNS AT-A-GLANCE

# MOLDED DOOR CONSTRUCTION

## Craftsman Smooth Surface - Flat Panel



**Craftsman III**  
Flat Panels  
Craftsman Sticking  
6'8" & 7'0"

## Smooth Surface - Raised Panel



**Bristol**  
Modified Cove  
& Bead Sticking  
6'8", 7'0" & 8'0"



**Arlington**  
Beaded Sticking  
Exclusive to  
JELD-WEN  
6'8", 7'0" & 8'0"



**Rockport™**  
Modified Cove  
& Bead Sticking  
6'8", 7'0" & 8'0"



**Atherton®**  
Ovolo Sticking  
6'8", 7'0" & 8'0"

## Smooth Surface - Raised Panel



**Santa Fe**  
Ovolo Sticking  
6'8", 7'0"  
and 8'0"



**Continental™**  
Ovolo Sticking  
6'8", 7'0"  
and 8'0"



**Princeton**  
Modified Cove  
& Bead Sticking  
6'8", 7'0"  
and 8'0"



**Cambridge**  
Ovolo Sticking  
6'8", 7'0"  
and 8'0"

## Impression Mirror



**Impression™ Mirror Door**

Side A: Beveled Mirror

Side B: 6-Panel Colonial  
or Bostonian (woodgrain)  
6-Panel Arlington (smooth)  
6-Panel Bristol



4-Panel Atherton

4-Panel Provincial

4-Panel Stanford

Side B Styles

## Woodgrain Surface - Raised Panel



**Colonial**  
Ovolo Sticking  
6'8", 7'0" & 8'0"



**Bostonian®**  
Modified Cove  
& Bead Sticking  
6'8", 7'0" & 8'0"



**Prefinished  
6-Panel**  
Ovolo Sticking  
6'8" & 7'0"



**Provincial®**  
Ovolo Sticking  
6'8" & 7'0"



**Stanford®**  
Ovolo Sticking  
6'8" & 7'0"



**Avalon®**  
Modified Cove  
& Bead Sticking  
6'8" & 7'0"



**Camden®**  
Modified Cove  
& Bead Sticking  
6'8" & 7'0"

Whether traditional or contemporary, JELD-WEN has sticking profile options that will distinguish the interior of your home with beautiful quality and attention to design detail.

## Craftsman Sticking JELD-WEN Exclusive



## Beaded Sticking Exclusive feature on Arlington door



## Ovolo Sticking



## Modified Cove & Bead Sticking



The core, or the materials used inside the door, affects the weight of the door, its ability to withstand impact, its fire rating and even sound transmission.

## Solid Particleboard Core: Combination Wood/MDF or All-Wood Frame



1-3/8" Door  
1-3/4" Door

20-minute fire rating  
available for 1-3/4"  
up to 3'0" x 8'0"



## Solid Mineral Core: All-Wood Frame



1-3/4" Door

45- or 60-minute fire ratings  
up to 3'0" x 8'0", manufactured  
to the current Georgia-Pacific  
or Marshfield Door Systems  
specifications

## Wide Stile with Solid Particleboard Core: Wood Frame



1-3/4" Door

20-minute fire rating



## Hollow Core: Wood/MDF Frame



1-3/8" Door

Blocking behind panels  
for support\*

\*Hollow core construction  
may vary by region

## FLUSH DOOR DESIGNS

Our Flush interior doors are available in a wide range of finish colors and woodgrains. The veneer samples shown below represent only a small offering of the many prefinished embossed and smooth medium density fiberboard colors and unfinished hardwood veneer species we offer. For a complete list of colors available to you, please contact your local dealer.



All Flush interior doors are available with ProCore the Quiet Door® construction for superior sound control.

In addition to these options, we provide a selection of sizes. Our flush doors come in widths of 1'0" through 4'0" and heights of 6'8", 7'0" and 8'0".



### Unfinished Hardwood Veneer

Offered in several species (Regional availability, please check with your dealer.)



Sliced Red Oak



Tropical Hardwood



Rotary-Cut Birch

*Variances in photography and printing may cause the finish colors shown in this catalog to differ from actual finishes.*

## FLUSH DOOR CONSTRUCTION

While keeping the look of interior doors consistent throughout your home, you may choose to vary the core of each, depending on the room in which the door will be installed. The core you select will determine the door's weight, impact resistance, fire rating and sound transmission.

### Solid Particleboard Core: Wood or MDF Frame



#### 1-3/8" Door

1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF

#### 1-3/4" Door

1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF 20-minute fire rating available in 1-3/4" up to 4'0" x 8'0"



### Solid Mineral Core: Mineral Composite Frame



#### 1-3/4" Door

45-, 60- and 90-minute fire ratings manufactured to the current Georgia-Pacific or Marshfield Door System specifications 1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF

### Solid Wood Stave Core: Wood Frame



#### 1-3/8" Door

1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF

#### 1-3/4" Door

1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF 20-minute fire rating available in 1-3/4" up to 4'0" x 8'0"



### Hollow Core: Combination Wood/MDF Frame





#### 1-3/8" Door

Corrugated honeycomb cell core 1/8" door facings with premium hardwood veneers or preprimed, un-primed or prefinished MDF

Please check with your local JELD-WEN dealer, distributor or plant for available frame options.

# MOLDED DOOR SIZE AND PROFILE OPTIONS

6'8" and 7'0" Doors	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
ARLINGTON 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	B	X	X
ARLINGTON 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	B	X	X
ATHERTON® 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
ATHERTON 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
AVALON® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
AVALON 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BOSTONIAN® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BOSTONIAN 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BRISTOL 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BRISTOL 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
CAMBRIDGE 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CAMBRIDGE 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CAMDEN® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
CAMDEN 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
COLONIAL 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
COLONIAL 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CONTINENTAL™ 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CONTINENTAL 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
CRAFTSMAN III™ 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	C	X	X
CRAFTSMAN III 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	C	X	X
IMPRESSION™ Arlington 6'8" Smooth	-	-	-	-	-	-	-	X	-	X	X	X	-	X	B	-	-
IMPRESSION Colonial 6'8" Woodgrain	-	-	-	-	-	-	-	X	-	X	X	X	-	X	O	-	-
IMPRESSION Bostonian 6'8" Woodgrain	-	-	-	-	-	-	-	X	-	X	X	X	-	X	MCB	-	-
PRINCETON 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
PRINCETON 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
PROVINCIAL® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
PROVINCIAL 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
ROCKPORT™ 6'8" Smooth	-	-	-	-	X	X	-	X	X	X	X	X	X	X	MCB	X	X
ROCKPORT 7'0" Smooth	-	-	-	-	-	-	-	X	X	X	X	X	X	X	MCB	X	X
SANTA FE 6'8" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
SANTA FE 7'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
STANFORD® 6'8" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
STANFORD 7'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
8'0" Doors	1'0"	1'2"	1'3"	1'4"	1'6"	1'8"	1'10"	2'0"	2'2"	2'4"	2'6"	2'8"	2'10"	3'0"	Sticking Profile	ProCore®	Bifolds
ARLINGTON 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	B	X	X
ATHERTON 8'0" Smooth	-	-	-	-	-	-	X	X	X	X	X	X	X	X	O	X	X
BOSTONIAN 8'0" Woodgrain	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
BRISTOL 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
CAMBRIDGE 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
COLONIAL 8'0" Woodgrain	-	-	-	-	X	X	X	X	X	X	X	X	-	X	O	X	X
CONTINENTAL 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X
PRINCETON 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	MCB	X	X
ROCKPORT 8'0" Smooth	-	-	-	-	X	X	-	X	X	X	X	X	X	X	MCB	X	-
SANTA FE 8'0" Smooth	X	X	X	X	X	X	X	X	X	X	X	X	X	X	O	X	X



# 6'8" AND 7'0" DOORS

## ARLINGTON

Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	5-1/2"	3-1/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
1'2"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	8" 9"	3-1/2"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	9-13/16"	4-3/32" (1'6") 5-3/32" (1'8")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
1'10" 2'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-1/2"	3-1/2" (1'10") 4-1/2" (2'0")	4"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
2'2" 2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-1/2"	3-1/2" (2'2") 4-1/2" (2'4")	4"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8"	4-1/2"	5"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
2'8"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9"	4-1/2"	5"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth
2'10" 3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-13/16"	4-1/2" (2'10") 5-1/2" (3'0")	5-3/8"	4-3/4" (6'8") 6-3/4" (7'0")	6-7/8"	9-1/2" (6'8") 11-1/2" (7'0")	B	Smooth

## ATHERTON®


Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-3/16" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'10" 2'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	5-9/16"	3-9/32" (1'10") 4-9/32" (2'0")	4-9/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'2" 2'4"	6'8" 7'0"	Four	1-3/8" 1-3/4"	7-9/16"	3-9/32" (2'2") 4-9/32" (2'4")	4-5/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'6"	6'8" 7'0"	Four	1-3/8" 1-3/4"	8-9/16"	4-9/32"	4-5/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'8"	6'8" 7'0"	Four	1-3/8" 1-3/4"	9-9/16"	4-9/32"	4-5/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'10" 3'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	11-9/16"	3-9/32" (2'10") 4-9/32" (3'0")	4-5/16"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


# 6'8" AND 7'0" DOORS

## AVALON®



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	6-3/16"	2-29/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7-11/16"	3-5/32" (1'2") 3-21/32" (1'3") 4-5/32" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	8-3/4"	4-5/8" (1'6") 5-5/8" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
1'10" 2'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15-5/8"	3-3/16" (1'10") 4-3/16" (2'0")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
2'2" 2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	19-5/8"	3-3/16" (2'2") 4-3/16" (2'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
2'6"	6'8" 7'0"	Three	1-3/8" 1-3/4"	21-5/8"	4-3/16"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
2'8" 2'10"	6'8" 7'0"	Three	1-3/8" 1-3/4"	23-5/8"	4-3/16" (2'8") 5-3/16" (2'10")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain
3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	27-5/8"	4-3/16"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	7-15/16" (6'8") 9-15/16" (7'0")	MCB	Oak Grain

## BRISTOL




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-15/16"	3-1/8" (1'10") 4-1/8" (2'0") 5-1/8" (2'2")	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-15/16"	4-1/8"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8-15/16"	4-1/8"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'8" 2'10"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-15/16"	4-1/8" (2'8") 5-1/8" (2'10")	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	11-15/16"	4-1/8"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth

## BOSTONIAN®



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-7/8"	3-1/16" (1'6") 4-1/16" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
1'10" 2'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-7/8"	3-3/16" (1'10") 4-3/16" (2'0")	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
2'2" 2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-7/8"	3-3/16" (2'2") 4-3/16" (2'4")	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8-7/8"	4-3/16"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
2'8"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-7/8"	4-3/16"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
2'10"	6'8" 7'0"	Six	1-3/8" 1-3/4"	10-7/8"	4-3/16"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain
3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	11-7/8"	4-3/16"	3-7/8"	4-1/4" (6'8") 6-1/4" (7'0")	6-7/8"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Pine Grain

## CAMBRIDGE



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-9/16"	3-7/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	13-11/16"	4-1/8" (1'10") 5-1/8" (2'0")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	4-1/8" (2'2") 5-1/8" (2'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-1/8"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-1/8"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-3/4"	5-1/8" (2'10") 6-1/8" (3'0")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Smooth

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman


\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

# 6'8" AND 7'0" DOORS

## CAMDEN®



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-11/16"	2-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-1/2"	3-1/4" (1'2") 3-3/4" (1'3") 4-1/4" (1'4")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15"	3-1/2" (1'0") 4-1/2" (2'0") 5-1/2" (2'2")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	5" (2'4")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-3/4"	4-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-3/4"	5-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	25"	5-1/2"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/8" (6'8") 10-1/8" (7'0")	MCB	Oak Grain

## COLONIAL




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'10" 2'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-9/16"	3-1/4" (1'10") 4-1/4" (2'0")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'2" 2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'8"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'10"	6'8" 7'0"	Six	1-3/8" 1-3/4"	10-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain
3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	11-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Pine Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

## CONTINENTAL™




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16" 8-9/16"	3-7/32" (1'0") 2-23/32" (1'2")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32" (1'3") 3-23/32" (1'4")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10-9/16"	3-23/32" (1'6") 4-23/32" (1'8")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
2'2" 2'4" 2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18" 18" 20"	4" (2'2") 5" (2'4") 5" (2'6")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
2'8" 2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21" 24" 24"	5-1/2" (2'8") 5" (2'10") 6" (3'0")	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth

## CRAFTSMAN III™



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	4"	4"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
1'2" 1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6"	4" (1'2") 4-1/2" (1'3")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-1/4"	3-7/8"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
1'6" 1'8" 1'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8") 6" (1'10")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
2'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15"	4-1/2"	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
2'2" 2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	17"	4-1/2" (2'2") 5-1/2" (2'4")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
2'6" 2'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	21"	4-1/2" (2'6") 5-1/2" (2'8")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth
2'10" 3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	25"	4-1/2" (2'10") 5-1/2" (3'0")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	8-15/16" (6'8") 10-15/16" (7'0")	Flat	C	Smooth

## IMPRESSION™ MIRROR DOOR



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
2'0"	6'8"	One	1-3/8"	15-3/8"	4-1/4"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth
2'4"	6'8"	One	1-3/8"	19-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth
2'6"	6'8"	One	1-3/8"	21-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth
2'8"	6'8"	One	1-3/8"	23-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth
3'0"	6'8"	One	1-3/8"	27-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	**	Pine Grain or Smooth


Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

\*\*Arlington Impression mirror doors have B sticking profile; Bostonian and Bristol Impression mirror doors have MCB sticking profile; Colonial Impression mirror doors have O sticking profile.


# 6'8" AND 7'0" DOORS

## PRINCETON



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-5/8"	2-11/16"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-5/8"	3-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-1/2"	3-1/4" (1'3") 3-3/4" (1'4")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15"	3-1/2" (1'10") 4-1/2" (2'0")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	3-15/16" (2'2") 4-15/16" (2'4")	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-3/4"	5-1/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-7/8"	4-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-7/8"	5-5/8"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	25"	5-1/2"	N/A	5-3/8" (6'8") 7-3/8" (7'0")	3-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	MCB	Smooth

## PROVINCIAL\*



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	5-9/16"	3-7/32"	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-9/16"	3-7/32"	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-9/16"	3-7/32"	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-9/16"	3-7/32"	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
1'10" 2'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	5-9/16"	3-3/16" (1'10") 4-3/16" (2'0")	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'2" 2'4"	6'8" 7'0"	Four	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'6"	6'8" 7'0"	Four	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'8"	6'8" 7'0"	Four	1-3/8" 1-3/4"	9-9/16"	4-1/4"	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
2'10"	6'8" 7'0"	Four	1-3/8" 1-3/4"	10-9/16"	4-1/4"	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain
3'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	11-9/16"	4-1/4"	4-3/8"	5-1/8" (6'8") 7" (7'0")	7"	9" (6'8") 11-1/8" (7'0")	O	Pine Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


## ROCKPORT™



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	10-1/4"	3-7/8"	N/A	4-5/8" 6-1/2"	N/A	8-3/8" 10-1/2"	MCB	Smooth
1'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	10-1/4"	4-7/8" 3-7/8"	N/A	4-5/8" 6-1/2"	N/A	8-3/8" 10-1/2"	MCB	Smooth
2'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	15-3/4"	4-1/8"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth
2'2" 2'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	19-3/4"	3-1/8" (2'2") 4-1/8" (2'4")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth
2'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	21-3/4"	4-1/8"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth
2'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	23-3/4"	4-1/8"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth
2'10" 3'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	25-3/4"	4-1/8" (2'10") 5-1/8" (3'0")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	N/A	8-1/2" (6'8") 10-1/2" (7'0")	MCB	Smooth

\* All panel, inner stile, top rail and lock rail measurements will match those listed above. Outer stile measurements may vary 1/4" (depending on pre-fit). All bottom rail measurements will be 1" shorter than the measurements listed above in order to accommodate track and hardware.

## SANTA FE



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-3/8" (6'8") 6-3/8" (7'0")	7"	9-7/8" (6'8") 11-7/8" (7'0")	O	Smooth

## STANFORD®




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
1'10" 2'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	5-9/16"	3-1/4" (1'10") 4-1/4" (2'0")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
2'2" 2'4"	6'8" 7'0"	Four	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
2'6"	6'8" 7'0"	Four	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
2'8" 2'10"	6'8" 7'0"	Four	1-3/8" 1-3/4"	9-9/16"	4-1/4" (2'8") 5-1/4" (2'10")	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain
3'0"	6'8" 7'0"	Four	1-3/8" 1-3/4"	11-9/16"	4-1/4"	4-3/8"	4-1/4" (6'8") 6-1/4" (7'0")	7"	9-1/8" (6'8") 11-1/8" (7'0")	O	Oak Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

# 6'8" AND 7'0" DOORS

## PREFINISHED (STAINED) SIX-PANEL




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
1'6" 1'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-7/8"	3-1/16" (1'6") 4-1/16" (1'8")	N/A	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
1'10" 2'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	5-7/8"	3-3/16" (1'0") 4-3/16" (2'0")	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
2'2" 2'4"	6'8" 7'0"	Six	1-3/8" 1-3/4"	7-7/8"	3-3/16" (2'2") 4-1/2" (2'4")	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
2'6"	6'8" 7'0"	Six	1-3/8" 1-3/4"	8-7/8"	4-3/16"	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
2'8"	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-7/8"	4-3/10"	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain
2'10" 3'0"	6'8" 7'0"	Six	1-3/8" 1-3/4"	10-7/8"	4-3/16" (2'10") 5-3/16" (3'0")	3-7/8"	4-1/8" (6'8") 6-1/8" (7'0")	6-7/8"	8-3/8" (6'8") 10-3/8" (7'0")	MCB	Oak Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


# 8'0" DOORS

## ARLINGTON



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0"	8'0"	Three	1-3/8" 1-3/4"	5-1/2"	3-1/4"	N/A	4-3/4"	6-7/8"	9-1/2"	B	Smooth
1'2"	8'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/4"	N/A	4-3/4"	6-7/8"	9-1/2"	B	Smooth
1'3" 1'4"	8'0"	Three	1-3/8" 1-3/4"	8"	3-1/2" 4"	N/A	4-3/4"	6-7/8"	9-1/2"	B	Smooth
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	9-13/16"	4-3/32" 5-3/32"	N/A	4-3/4"	6-7/8"	9-1/2"	B	Smooth
1'10" 2'0"	8'0"	Six	1-3/8" 1-3/4"	5-1/2"	3-1/2" 4-1/2"	4"	4-3/4"	6-7/8"	9-1/2"	B	Smooth
2'2" 2'4"	8'0"	Six	1-3/8" 1-3/4"	7-1/2"	3-1/2" 4-1/2"	4"	4-3/4"	6-7/8"	9-1/2"	B	Smooth
2'6"	8'0"	Six	1-3/8" 1-3/4"	8"	4-1/2"	5"	4-3/4"	6-7/8"	9-1/2"	B	Smooth
2'8"	8'0"	Six	1-3/8" 1-3/4"	9"	4-1/2"	5"	4-3/4"	6-7/8"	9-1/2"	B	Smooth
2'10" 3'0"	8'0"	Six	1-3/8" 1-3/4"	9-13/16"	4-1/2" 5-1/2"	5-3/8"	4-3/4"	6-7/8"	9-1/2"	B	Smooth

## ATHERTON®



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'10" 2'0"	8'0"	Four	1-3/8" 1-3/4"	5-9/16"	3-1/4" (1'10") 4-1/4" (2'0")	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth
2'2" 2'4"	8'0"	Four	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth
2'6"	8'0"	Four	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth
2'8"	8'0"	Four	1-3/8" 1-3/4"	9-9/16"	4-1/4"	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth
2'10" 3'0"	8'0"	Four	1-3/8" 1-3/4"	11-9/16"	3-1/4" (2'10") 4-1/4" (3'0")	4-3/8"	4-7/16"	7"	8-15/16"	O	Smooth

## BOSTONIAN®




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	9-3/4"	4-1/8" (1'6") 5-1/8" (1'8")	N/A	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain
1'10" 2'0"	8'0"	Six	1-3/8" 1-3/4"	5-15/16"	3-1/8" (1'10") 4-1/8" (2'0")	3-7/8"	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain
2'2" 2'4" 2'6"	8'0"	Six	1-3/8" 1-3/4"	7-11/16"	3-3/8" (2'2") 4-3/8" (2'4") 5-3/8" (2'6")	3-7/8"	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain
2'8" 2'10" 3'0"	8'0"	Six	1-3/8" 1-3/4"	9-11/16"	4-3/8" (2'8") 5-3/8" (2'10") 6-3/8" (3'0")	3-7/8"	4-1/4"	6-7/8"	8-1/4"	MCB	Pine Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.


# 8'0" DOORS

## BRISTOL




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1-32" (1'8")	N/A	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
1'10" 2'0"	8'0"	Six	1-3/8" 1-3/4"	5-15/16"	3-1/8" (1'10") 4-1/8" (2'0")	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
2'2" 2'4"	8'0"	Six	1-3/8" 1-3/4"	5-15/16" (2'2") 7-15/16" (2'4")	5-1/8" (2'2") 4-1/8" (2'4")	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
2'6"	8'0"	Six	1-3/8" 1-3/4"	8-15/16"	4-1/8"	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
2'8"	8'0"	Six	1-3/8" 1-3/4"	9-15/16"	4-1/8"	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth
2'10" 3'0"	8'0"	Six	1-3/8" 1-3/4"	9-15/16" (2'0") 11-15/16" (3'0")	5-1/8" (2'10") 4-1/8" (3'0")	3-7/8"	5-1/16"	6-7/8"	8-7/16"	MCB	Smooth

## CONTINENTAL™




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/4"	4-1/4"	11"	O	Smooth
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	9-3/4"	4-1/8" (1'6") 5-1/8" (1'8")	N/A	5-1/4"	4-1/4"	11"	O	Smooth
1'10" 2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0") 6" (2'2")	N/A	5-1/4"	4-1/4"	11"	O	Smooth
2'4" 2'6"	8'0"	Two	1-3/8" 1-3/4"	18" 20"	5" (2'4") 5" (2'6")	N/A	5-1/4"	4-1/4"	11"	O	Smooth
2'8" 2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	24"	4" (2'8") 5" (2'10") 6" (3'0")	N/A	5-1/4"	4-1/4"	11"	O	Smooth

## CAMBRIDGE




Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-7/16"	7"	8-15/16"	O	Smooth
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	9-3/4"	4-1/8" (1'6") 5-1/8" (1'8")	N/A	4-7/16"	7"	8-15/16"	O	Smooth
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	13-11/16"	4-5/32" (1'10") 5-5/32" (2'0")	N/A	4-7/16"	7"	8-15/16"	O	Smooth
2'2" 2'4" 2'6"	8'0"	Two	1-3/8" 1-3/4"	17-11/16" 17-11/16" 19-11/16"	4-5/32" (2'2") 5-5/32" (2'4") 5-5/32" (2'6")	N/A	4-7/16"	7"	8-15/16"	O	Smooth
2'8" 2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	21-11/16" 23-11/16" 23-11/16"	5-5/32" (2'8") 5-5/32" (2'10") 6-5/32" (3'0")	N/A	4-7/16"	7"	8-15/16"	O	Smooth

## PRINCETON



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	14-15/16"	3-1/2" (1'10") 4-1/2" (2'0")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	18-1/8"	3-15/16" (2'2") 4-15/16" (2'4")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-1/8" (2'6")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
2'8"	8'0"	Two	1-3/8" 1-3/4"	22-13/16"	4-1/2" (2'8")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	25"	4-1/2" (2'10") 5-1/2" (3'0")	N/A	5-1/4"	3-3/4"	8-1/4"	MCB	Smooth

## COLONIAL



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'6" 1'8"	8'0"	Three	1-3/8" 1-3/4"	11-9/16"	3-7/32" (1'6") 4-7/32" (1'8")	N/A	4-1/4"	7"	9"	O	Pine Grain
1'10" 2'0"	8'0"	Six	1-3/8" 1-3/4"	5-9/16"	3-1/4" (1'10") 4-1/4" (2'0")	4-3/8"	4-1/4"	7"	9"	O	Pine Grain
2'2" 2'4"	8'0"	Six	1-3/8" 1-3/4"	7-9/16"	3-1/4" (2'2") 4-1/4" (2'4")	4-3/8"	4-1/4"	7"	9"	O	Pine Grain
2'6"	8'0"	Six	1-3/8" 1-3/4"	8-9/16"	4-1/4"	4-3/8"	4-1/4"	7"	9"	O	Pine Grain
2'8"	8'0"	Six	1-3/8" 1-3/4"	9-9/16"	4-1/4"	4-3/8"	4-1/4"	7"	9"	O	Pine Grain
3'0"	8'0"	Six	1-3/8" 1-3/4"	11-9/16"	4-1/4"	4-3/8"	4-1/4"	7"	9"	O	Pine Grain

## ROCKPORT™



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'6"	8'0"	6	1-3/8" 1-3/4"	8-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
1'8"	8'0"	6	1-3/8" 1-3/4"	8-1/2"	5-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'0"	8'0"	6	1-3/8" 1-3/4"	14-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'2"	8'0"	6	1-3/8" 1-3/4"	14-1/2"	5-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'4"	8'0"	6	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'6"	8'0"	6	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'8"	8'0"	6	1-3/8" 1-3/4"	22-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
2'10"	8'0"	6	1-3/8" 1-3/4"	22-1/2"	5-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth
3'0"	8'0"	6	1-3/8" 1-3/4"	25-3/4"	5-1/8"	N/A	4-5/8"	4-1/4"	10-1/8"	MCB	Smooth

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

# 8'0", BIFOLD & COMMERCIAL DOORS

# JELD-WEN® INTERIOR AND EXTERIOR DOOR SLAB AND SYSTEM LIMITED WARRANTY

## OUR WARRANTY TO YOU...

JELD-WEN® Products<sup>1</sup> are designed to create lasting value for your home. This warranty is effective for JELD-WEN products manufactured on or after **May 1, 2012** for use in the United States and Canada. Any previous warranties will continue to apply to products manufactured by JELD-WEN prior to this date. For additional information, including care and maintenance information refer to [www.jeld-wen.com](http://www.jeld-wen.com) or [www.jeld-wen.ca](http://www.jeld-wen.ca).

### What This Warranty COVERS

We warrant to the original owner<sup>2</sup> that if your JELD-WEN Product exhibits a defect in material or workmanship within the time periods from the date of purchase as specified below, we will, at our option, repair, replace or refund the purchase price of the Product or component part. Skilled labor<sup>3</sup> (where deemed necessary by us) to repair or replace any component is provided for **one (1)** year from the date of purchase.

### Owner-Occupied Single-Family Residence Limited Warranty

**Door Slabs:** Except as set forth below, we warrant our door slabs, including any glass inserts, miscellaneous hardware, and accessories provided and installed by us, as follows:

Door Slab	Coverage
Fiberglass Exterior Doors	As long as you own and occupy your residence
FiberLast® Engineered Composite Exterior Doors	As long as you own and occupy your residence
Steel Exterior Doors	Ten (10) years
Wood Exterior Doors	Five (5) years
Interior Doors	Five (5) years

**Factory Prefinish:** We warrant the factory-applied prefinish on our doors against peeling, checking, or cracking for periods listed below. Should the factory prefinish be proven defective, we will at our option, replace or refinish the door or pay up to credit per opening to the current owner. (Note: this coverage applies to factory-applied finish coat options only; standard factory-applied primer is not a finish coat.)

Product	Coverage	Refinish Credit
Aurora® Fiberglass Doors	5 years	\$350 per opening
Custom Exterior Wood Doors	1 year	\$250 per opening
Custom Interior Wood Doors	1 year	\$150 per opening
All other Doors	1 year	\$100 per opening

**Door Frames:** We warrant our door frames for **one (1)** year from the date of purchase.

**AuraLast® Protection for Door Slabs and Frames:** Our AuraLast pine wood door slabs will be free from wood decay and/or termite damage for **twenty (20)** years from the date of initial purchase. Our AuraLast pine door frame components will be free from wood decay and/or termite damage for **as long as the original consumer owns the home** in which the AuraLast wood frames are originally installed. Warranty coverage outside Canada, the contiguous 48 states and Alaska is contingent upon approval from the JELD-WEN Customer Care Department. Please contact us.

**Severe Weather® Glass:** We warrant each Severe Weather glass unit for **ten (10)** years.

**Retractable Screens:** We warrant retractable roll screens for **five (5)** years.

**Spontaneous Glass Breakage:** We warrant sealed glass units installed in exterior doors (excluding laminated glass, and special glazings) for spontaneous breakage for **one (1)** year (including free replacement glass and skilled labor<sup>3</sup> necessary

to replace the glass for one (1) year. Spontaneous breakage occurs when the glass develops a crack without sign of impact.

### Commercial Limited Warranty (Other than Owner-Occupied Single-Family Residence)

**Fiberglass, FiberLast, Steel, Wood and Interior Door Slabs:** We warrant our door slabs for **five (5)** years from the date of initial purchase.

**All Other Products, Components, Prefinishes, and Options as Listed Above:** Coverage is the same as for Owner-Occupied Single-Family Residences as listed above.

### Transferability

This warranty is not transferable.

### How to Get Assistance

If you have a problem with your JELD-WEN Door, immediately upon discovery, contact the distributor or dealer from whom you purchased our product or contact us directly:

#### In the United States:

Mail: JELD-WEN Customer Care  
Attn: Door Warranty Claims  
P.O. Box 1329, Klamath Falls, OR 97601  
Phone: 800-JELD-WEN (800-535-3936)  
Fax: 800-436-5954  
Email: CustomerServiceAgents@jeld-wen.com  
Web: www.jeld-wen.com/contact-us

#### In Eastern Canada:

Mail: JELD-WEN Service Department  
90, rue Industrielle  
Saint-Appollinaire, Quebec, Canada G0S 2E0  
Phone: 800-463-1930  
Fax: 888-998-1599

#### In Western Canada:

Mail: JELD-WEN Service Department  
550 Munroe Avenue  
Winnipeg, Manitoba, Canada R2K 4H3  
Phone: 888-945-5627  
204-668-8230  
Fax: 204-663-1072  
Email: wpgservice@jeld-wen.com

We can respond quickly and efficiently if you provide the following: a) date and location of purchase, or product identification from the tag on the top edge of the slab, b) how to contact you, c) the address where the product can be inspected, and d) a description of the apparent problem and the product (photographs are helpful).

### What We Will Do


Upon receiving your notification, we will send out an acknowledgement within three business days to the contact, which you have provided. We will investigate your claim and will begin to take appropriate action within 30 days after receipt of notification. If your warranty claim is denied, we may charge an inspection fee for an onsite inspection that is required or requested by you.

If your claim is accepted, and we choose to repair or replace the product or a component of the product, the replacement product/component will be provided in the same specification as the original product. Replacement products, components and services are warranted for the balance of the original product or service warranty, or 90 days, whichever is longer.

If the claimed nonconformity is warp of a door slab, we may defer repairing or replacing the door slab for a period up to 12 months from the date of claim. It is not uncommon for a temporary warp condition to occur as the door slab adjusts to local humidity and temperature conditions. This deferral will not be counted against the warranty period.


Continued on next page

## SANTA FE



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-3/8"	7"	9-7/8"	O	Smooth
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-3/8"	7"	9-7/8"	O	Smooth
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-3/8"	7"	9-7/8"	O	Smooth
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-3/8"	7"	9-7/8"	O	Smooth
2'6"	8'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	O	Smooth
2'8"	8'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	O	Smooth
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-3/8"	7"	9-7/8"	O	Smooth

## BIFOLDS




Door Design	Heights*	# of Panels	Thickness	Widths* 2 doors or 1 unit	Widths* 4 doors or 2 units
Arlington	6'7"; 6'11"; 7'11"	Three	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Atherton®	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Avalon®	6'7"; 6'11"	Three	1-3/8"	2'0"; 2'6"; 3'0"	4'0"; 5'0"; 6'0"
Bostonian®	6'7"; 6'11"; 7'11"	Three	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Bristol	6'7"; 6'11"; 7'11"	Three	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Cambridge	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Camden®	6'7"; 6'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Colonial	6'7"; 6'11"; 7'11"	Three	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Continental™	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Craftsman III™	6'7"	Two	1-3/8"	1'8"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	4'0"; 5'0"; 6'0"
Princeton	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Provincial®	6'7"; 6'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Rockport	6'7"; 6'11"	Five	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"
Santa Fe	6'7"; 6'11"; 7'11"	Two	1-3/8"	2'0"; 2'4"; 2'6"; 2'8"; 3'0"	4'0"; 4'8"; 5'0"; 5'2"; 5'6"; 6'0"

\* All panel, inner stile, top rail and lock rail measurements will match those listed above. Outer stile measurements may vary 1/4" (depending on pre-fit). All bottom rail measurements will be 1" shorter than the measurements listed above in order to accommodate track and hardware.

Bifolds are available in alternate heights and widths. Please contact your local JELD-WEN facility for specifications and availability of alternate sizes. All bifolds are boxed (or end-capped) with track and hardware included.

## COMMERCIAL WIDE STILE



Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface
3'0" Arlington	6'8" 7'0"	Six	1-3/8" 1-3/4"	9"	6-1/2"	5"	5-9/16" (6'8") 7-9/16" (7'0")	6-7/16"	10-1/2" (6'8") 12-1/2" (7'0")	B	Smooth
3'0" Continental	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	6"	N/A	5-1/4" (6'8") 7-1/4" (7'0")	4-3/16"	10-13/16" (6'8") 12-13/16" (7'0")	O	Smooth
3'0" Colonial	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-1/8"	6-7/16"	4-7/8"	4-1/2" (6'8") 6-1/2" (7'0")	6-7/16"	10-9/16" (6'8") 12-9/16" (7'0")	O	Oak Grain

Sticking Profile: B=Beaded, MCB=Modified Cove and Bead, O=Ovolo, C=Craftsman

\*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-3/4" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 3-13/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

### What This Warranty Does NOT Cover

JELD-WEN manufactures and sells both individual door slabs and complete door systems. This warranty does not cover parts or components (e.g., locksets, handles, etc.) not sold by JELD-WEN to the original owner. See your distributor or dealer regarding the warranty on the entire door system and/or these other components.

We are not liable for:

- Normal wear and tear, including normal wear and tear of weatherstrip; and natural weathering of surfaces or variations in the color or texture of wood or finish; surface cracks that are less than 1/32" in width and/or 2" in length; for knotty alder and juniper: surface checks that are less than 1/8" in width and/or 5" in length, and knot placement, quantity, or size.
- Problems due to misuse or abuse; failure to follow the care and maintenance instructions; or as a result of any cause beyond our reasonable control (e.g. fire, flood, earthquake, other acts of nature, and acts of third parties outside of our control).
- Problems related to: improper field finishing of all surfaces (front and back) and edges (top, bottom, and sides) of the door slab and frame (See our Finishing Instructions at [www.jeld-wen.com/resources](http://www.jeld-wen.com/resources)); variation or unsatisfactory results in sheen or texture resulting from the field application of paint or any other finishing material.
- Failure to provide an adequate overhang for exterior doors; damage caused by extreme temperature buildup where storm doors are present. For general guidelines, see our "Appropriate Protection for Exterior Doors" in our product literature or at [www.jeld-wen.com/resources](http://www.jeld-wen.com/resources); for specific information pertaining to your structure, consult your contractor or other building professional.
- Warp for any 3'6" wide by 8' 0" high by 1 3/4", or smaller door slab, which does not exceed 1/4" in the plane of the door slab itself; door slabs wider and/or higher are not guaranteed for warp.
- Bow or misalignment in the frame or jamb in which the door slab is hung (if such is purchased from JELD-WEN unmachined and not prehung).
- Slight expansion or contraction due to varying environmental conditions; slab movement (shrinkage or swelling) of 1/4" or less due to temperature and humidity, consult our Care & Maintenance documents on how to work with this natural movement.
- Wood decay for wood components other than of AuraLast pine; and wood decay for any wood components (including pine) that come in direct contact with soil. Note: superficial mold/mildew does not indicate wood decay.
- Problems related to water and/or air infiltration due to improper assembly; installation errors or flaws in building design and construction; installation must be in strict conformance with the installation instructions provided by the manufacturer of the door entry system.
- Structural integrity issues or other problems caused by improper field fitting of the hardware, improper sizing of the door slab, or other assembly problems.
- Slight imperfections or wavy distortions in the glass that don't impair structural integrity. Note: wavy distortions in the glass (e.g. related to laminate interlayer or heat strengthening of glass) are not considered a defect. Slight color variations in glass are not considered a defect.
- Screen damage due to normal wear and tear, misuse, abuse, or insect or animal activity.
- Condensation or damage as a result of condensation (Note: unless due to insulating glass failure, most condensation problems are related to excessive humidity levels in a structure; contact a heating/air conditioning specialist for help).
- Damage or poor product performance resulting from installation into a condition that exceeds product design standards and/or certified performance specifications and/or does not comply with applicable building codes.
- Hardware, accessories or inserts that are not provided by us.

- Discoloration or rusting of decorative metal accent options, such as grilles, clavos, straps, etc.; discoloration of wood sills provided by us.
- Cost for labor, removal or disposal of defective product(s), installation or finishing of the replacement door or component.
- Incidental or consequential damage. Some states/provinces do not allow the exclusion or limitation of incidental or consequential damages, so this may not apply to you.

#### Important Legal Information --

##### Please read this carefully. It affects your rights.

This Limited Warranty document sets forth our maximum liability for our products. We shall not be liable for special, indirect, consequential, or incidental damages. Your sole and exclusive remedy with respect to any and all losses or damages resulting from any cause whatsoever shall be as specified above. We make no other warranty or guarantee, either express or implied, including implied warranties of merchantability and fitness for a particular purpose to the original purchaser or to any subsequent user of the Product, except as expressly contained herein. In the event state or provincial law precludes exclusion or limitation of implied warranties, the duration of any such warranties shall be no longer than, and the time and manner of presenting any claim thereon shall be the same as, that provided in the express warranty stated herein. This Limited Warranty document gives you specific legal rights, and you may have other rights that vary from state/province to state/province.

Any dispute, controversy or claim arising out of or relating to this warranty, any alleged breach thereof, or the use or sale of the products to which this warranty applies shall be resolved by mandatory and binding arbitration administered by the American Arbitration Association in accordance with its commercial arbitration rules. Original purchaser agrees that they may assert claims against JELD-WEN in their individual capacity only, and not as a plaintiff or class member in any purported class action proceeding. Rejection of these dispute resolution provisions must be sent to JELD-WEN at the address provided herein within thirty (30) days of original purchaser's receipt of the Products to which this warranty applies.

No distributor, dealer or representative of JELD-WEN has the authority to change, modify or expand this warranty. The original purchaser of this Product acknowledges that they have read this warranty, understand it and are bound by its terms and agrees to provide this warranty to the original owner of the structure into which the Product is installed.

<sup>1</sup> "JELD-WEN Products" shall refer to interior and exterior door slabs and systems manufactured in the United States and marketed under the JELD-WEN brand name for use in the United States and Canada. See our separate Export Warranty for applicable coverage on products used outside the United States and Canada.

<sup>2</sup> This warranty extends to the original owner (original owner means the contractor/dealer/distributor/purchaser and the initial owner of the structure where the product is initially installed) and is not transferable. The original purchaser of this product acknowledges that they have read this warranty, understand it and are bound by its terms and agrees to provide this warranty to the original owner of the structure into which the product is installed. Should state or provincial law preclude no transferability, then the warranty period is effective as applicable up to five (5) years from the date of initial purchase for door slabs and systems and one (1) year from the date of manufacture for the factory pre-finish.

<sup>3</sup> "Skilled labor" refers to tasks where specialized technical knowledge, experience, methods or tools are required to properly identify, diagnose and/or correct product-related problems.

© 2010, JELD-WEN, inc. | JELD-WEN, Aurora, FiberLast and AuraLast are trademarks or registered trademarks of JELD-WEN, inc., Oregon, USA. All other marks are the property of their respective owners.

## ABOUT JELD-WEN



Since 1960, when JELD-WEN began with one Oregon millwork plant, we've been dedicated to crafting reliable windows and doors. Today you can see, touch and feel reliability in our beautiful windows and doors because of their durability, energy efficiency and worry-free performance.

We measure our success by the relationships we build with our customers, suppliers and communities where we live and work. We've partnered with organizations such as the Green Building Initiative, which accelerates green-building practices by promoting environmentally progressive approaches that are practical, affordable and accessible.

Another way we fulfill our commitment to the communities where we operate, is through the JELD-WEN Foundation, which was created in 1969 to support worthwhile endeavors in the communities where JELD-WEN operates.

JELD-WEN is an official partner of Major League Soccer and the Portland Timbers, as well as a founding member of the Portland Timbers Community Fund. Our soccer partnerships help us connect with grass roots efforts that build strong communities.

Every time the Timbers score a goal, we sponsor a tree to be planted through Friends of Trees.

The JELD-WEN website is your ultimate resource for learning about our reliable windows and doors. It has all the product information and design advice you need. Visit us at [jeld-wen.com](http://jeld-wen.com) today.



Official window and door provider of Major League Soccer



JELD-WEN is proud to support a better way to build

©2012, 2011 JELD-WEN, inc.; Door designs and this publication are owned by JELD-WEN, inc. and are protected under the U.S. Copyright Act and other intellectual property laws. All trademarks, service marks, logos and the like (whether registered or unregistered) are owned or controlled by JELD-WEN, inc. or others. Unauthorized use or duplication of JELD-WEN intellectual property is prohibited.

JELD-WEN reserves the right to change product specifications without notice. Please check our website, [jeld-wen.com](http://jeld-wen.com), for current information.

10-030 08/12 (SB 04/13 4M)