





**G-Tech**

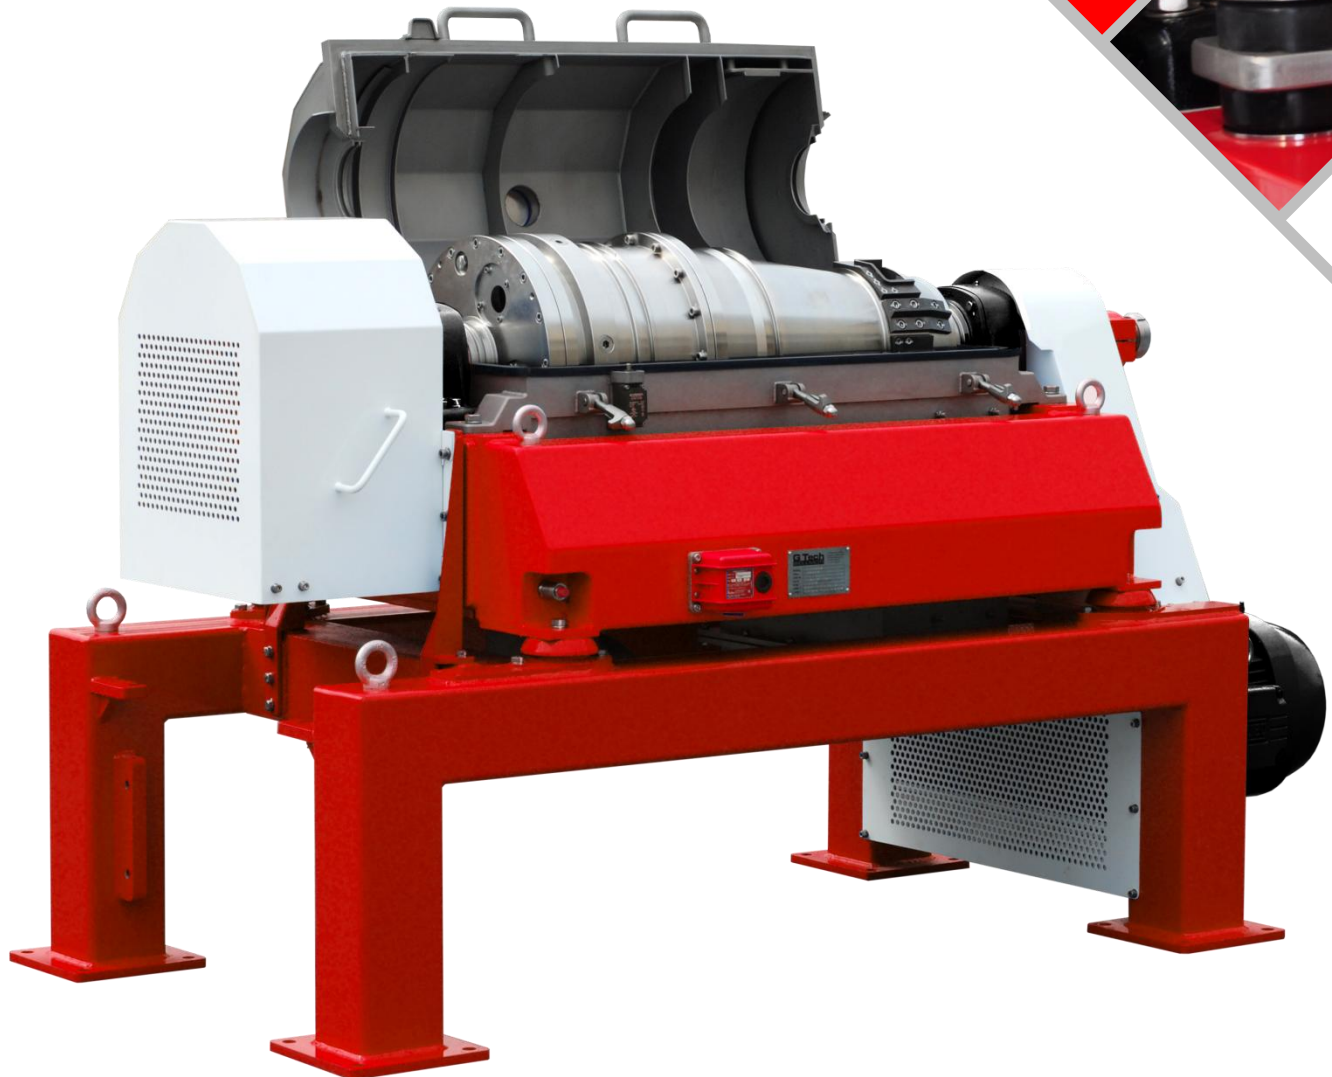

**Decanter 1433**

## Specifications

<b>Application:</b>	2 or 3 Phase separation
<b>Capacity:</b>	3m <sup>3</sup> /hr - 10m <sup>3</sup> /hr (product dependant)
<b>Bowl Diameter:</b>	353mm (14")
<b>Bowl Length:</b>	838mm (33")
<b>Max Bowl Speed:</b>	4000rpm
<b>Max G-Force:</b>	3150g
<b>Power:</b>	WEG 18.5 - 37kW Main Drive /WEG 4 - 15kW Back Drive
<b>Gearbox:</b>	2.5kNm (158:1), 3.5kNm (57:1) or Hydraulic Viscotherm Rotodiff
<b>Materials/Finish:</b>	Bowl Material: 316 Stainless Steel / Wetted Parts: Stainless Steel
<b>Options:</b>	Frame or skid mount Conveyor wear protection options Fixed torque arm or backdrive Other options on request

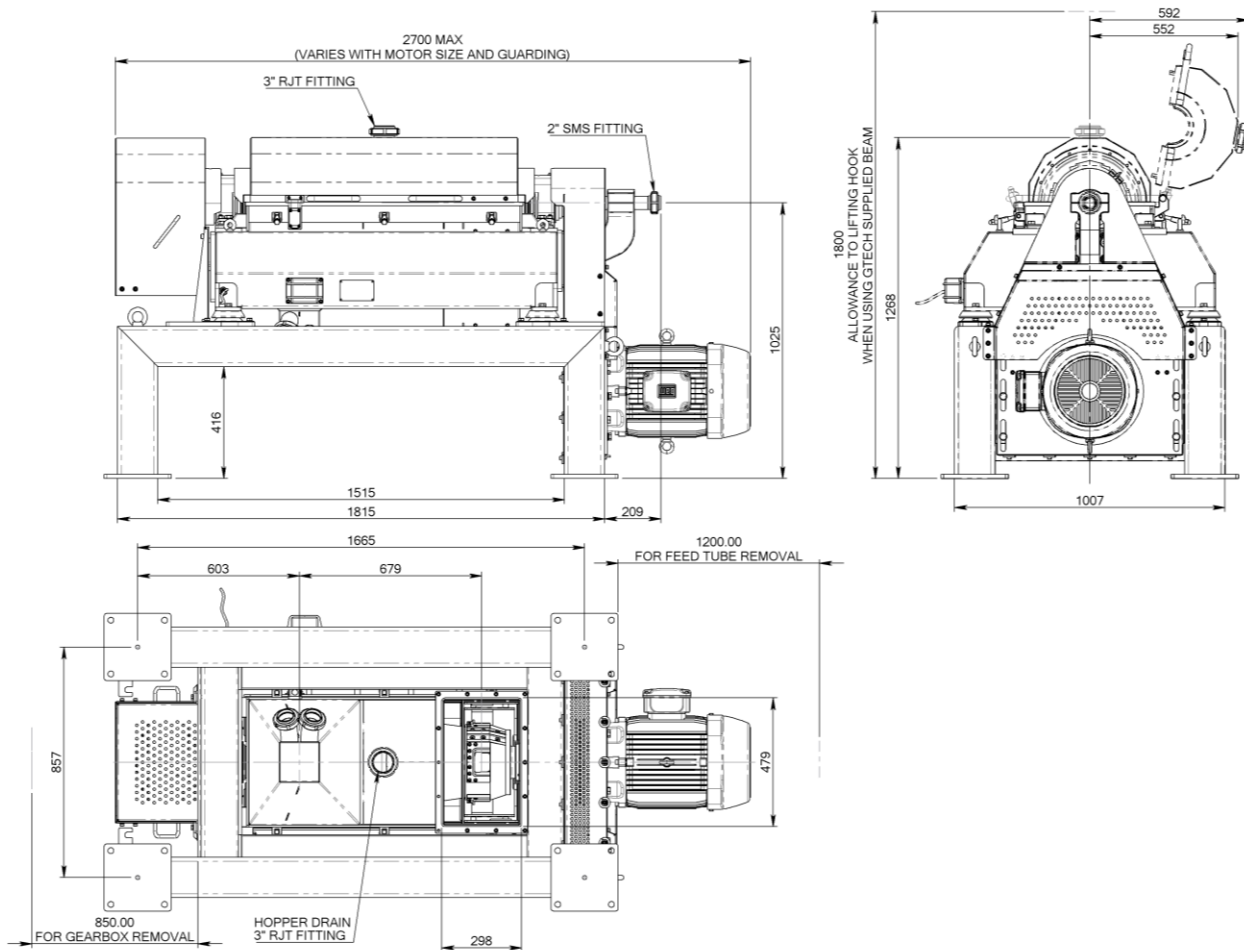

## Contact Us

**USA**  
2511 N Frazier Street  
Conroe  
Texas 77303  
Tel: +1281 290 9229  
Email: [sales@gtechus.com](mailto:sales@gtechus.com)  
Website: [www.gtechus.com](http://www.gtechus.com)  
ISO9001 registered

**New Zealand**  
P.O. Box 29 · Kaiapoi 7644  
21 Empire Rd. · Kainga  
Christchurch 8083 New Zealand  
Tel: +64 3 323 6151  
Email: [sales@gtechnz.com](mailto:sales@gtechnz.com)  
Website: [www.gtechnz.com](http://www.gtechnz.com)  
ISO9001 registered

**Australia**  
14A Nicholas Drive,  
Dandenong 3175  
Victoria, Australia  
Tel: +61 3 9768 3866  
Email: [sales@gtechau.com](mailto:sales@gtechau.com)  
Website: [www.gtech-australia.com](http://www.gtech-australia.com)



ISO 9001