


# Sustainable Coils

## Replacement Coil Solutions!

### MOBILE HOME COIL DIMENSIONS

Revision Date: 7/17/17

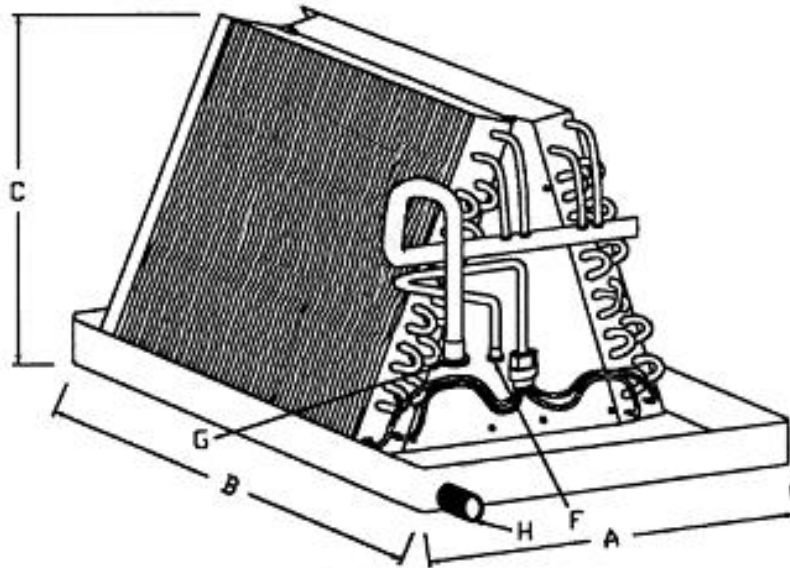

COIL MODEL	A	B	C	F	G	H
1024A-MH	18	19 1/2	16 1/2	3/8	3/4	3/4
1036A-MH	18	19 1/2	14 1/2	3/8	3/4	3/4
1048A-MH	18	19 1/2	18 1/2	3/8	7/8	3/4
1064A-MH	18	19 1/2	18 1/2	3/8	7/8	3/4

Hairpin Tube:	3/8 O.D. UNIGUARD® by Luvata copper alloy tubing
Rows/FPI:	2 rows, 14 FPI: 1024A-MH 3 rows, 14 FPI: 1036A-MH, 1048A-MH 4 rows, 12 FPI: 1064A-MH
End Plates:	Aluminum
Surface Area (sq. ft.):	1024A=3.56, 1036A=3.11, 1048A=4.00, 1064A=4.00
Metering:	Piston metered for R-22 refrigerant, additional 410A piston optional
Refrigerant connections:	Pre-swaged
IRV (cu. In.):	1024A=100.35, 1036A=131.71, 1048A=169.34, 1064A=225.79
Drain Pan:	1024A, 1036A, 1048A: Plastic 1064A: 22 ga. G-90 Paint Grip, coated & painted
Holding Charge:	Dry nitrogen
Warranty:	5 year replacement

Please visit our website [www.SustainableCoils.com](http://www.SustainableCoils.com) for further information regarding our complete product line.