


SAFE-COM**WIRELESS**

Safe-Com DASassure™
Public Safety Distributed Antenna System
Off-Air Solution
VHF, UHF, 700, 800 & 900 MHz
Preliminary Data Sheet


- Class A Channelized Repeater - DAS
- Supports All Five Public Safety Bands / 1 or 2 watts per band
- Upgradeable – add new channels, even new bands
- Small Size : 12 x 15 inch
- Very Low Power Consumption
- Card Level Automatic Redundancy
- Lowest Spurious due to advanced filtering design

Safe-Com's *DASassure™* is a patent-pending fiber Distributed Antenna System utilizing an new architecture that addresses the challenges of designing, deploying and maintaining a Public Safety DAS over its life-time. This innovative approach utilizes dedicated parallel channel processing assuring the lowest spurious and highest signal performance for clear mission-critical coverage enhancement. This modular hot-swap card system permits single channel expansion on ANY frequency thanks to it's micro-power amp architecture. The design is the most compact fiber DAS available – easily fitting up to 5 bands into a ~12x15x6inch NEMA 4 unit. All this with the industry's lowest power consumption of 50 watts avg. and 65 watts peak. This also makes the battery backup system the smallest available with 12 - 24 hours packed into < 0.5 ft³. Safe-Com's high-quality manufacturing system and superior applications support assures your success and the public's safety.



Parameter	Value
Output Power, 1 watt nominal (Note 2) 2 watt nominal (Note 3)	UHF,7,8,9 : 20dBm at 8 channels, 18dBm min. VHF : 20dBm at 4 channels, 18 dBm min. 2 watt version: 3dB higher per channel
Input Power maximum UL / DL	-10dBm max input (off-air port) 2 watts max downlink (direct connect)
Gain UL / DL	100 to 80 dB (off-air version)
Noise Figure	9 dB
Spurious	FCC Compliant – typically -60dBc
Rejection	-50 dBc at 50kHz typical (Class A Unit)
Gain Control (Note 4)	30dB
Optical Loss (SMF SC/APC)	5dB _o
Power	40 watts avg. at 10 channels, 60 watts peak (Note 4)
Size	11.8 x 10.8 x 6.5 inches - 20lbs Head-end / Remote / Battery backup
Temperature	-10 to +50 deg C

Note 1) Redundancy feature is an option; 2,3) Duplexer reduces output power by 2dB; 3) 2 watts is supplied at 2 ports, 1 watt each. 4) Gain range is shared with Automatic Level Protection Control Circuit.

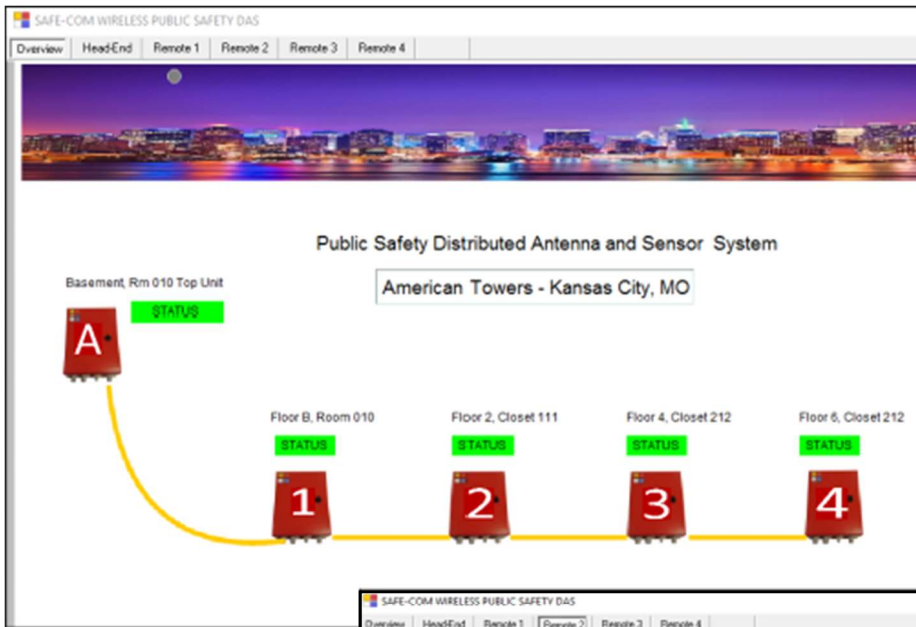


DASSassure™ NMS

A full featured Network Management Systems assures you have control of your radio network. Shown here is the top layer of the NMS displaying overall status of the fielded units.

You have full insight and remote control of each band, each channel and full independent uplink and downlink controls. Critical monitor values related to each fielded unit is displayed clearly and distinctly.
(Preliminary Graphic).

Card #	Channel Status	Type	U/L - D/L	Enter Frequency	RF out dBm	RF out Adjust	Attenuator Setpoint	Alarms	Notes
1	ON	DL	DL	151.3025	20.5	▲ ▼	6	OK	
2	ON	DL	DL	468.1760	21.5	▲ ▼	5	OK	
3	ON	DL	DL	468.1850	21.0	▲ ▼	6	OK	
4	ON	DL	DL	769.65625	20.5	▲ ▼	7	OK	
5	ON	DL	DL	769.15625	21.0	▲ ▼	6	OK	
6	ON	DL	DL	858.2125	20.5	▲ ▼	7	OK	Added 2-17
7	ON	DL	DL	856.2125	21.5	▲ ▼	5	OK	
8	ON	DL	DL	854.9875	20.5	▲ ▼	6	OK	
9	ON	UL	UL	VHF-UHF	OPEN	▲ ▼	18	OK	
10	ON	UL	UL	700 - 800	Squelched	▲ ▼	10	OK	

NFPA Alarms : BDA Alarm VSWR AC Power Battery Charge Status

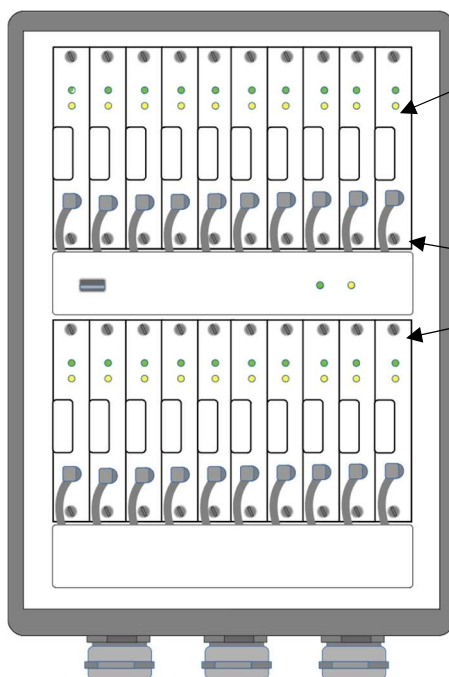


Channel Cards – Class A filtering

- Single Frequency per card
- Card Level Redundancy - Automatic Switchover
- Uplink – Channel Cards
- Downlink – Channel Cards
- Upgradeable
- New frequency? plug-in a card


High reliability and ultimate flexibility is assured by design. The ground breaking architecture of the Safe-Com DAS solution guarantees it.

No major single point of failures as can be found in other current designs. Public safety requires reliability and Safe-Com delivers.


System Deployment Options

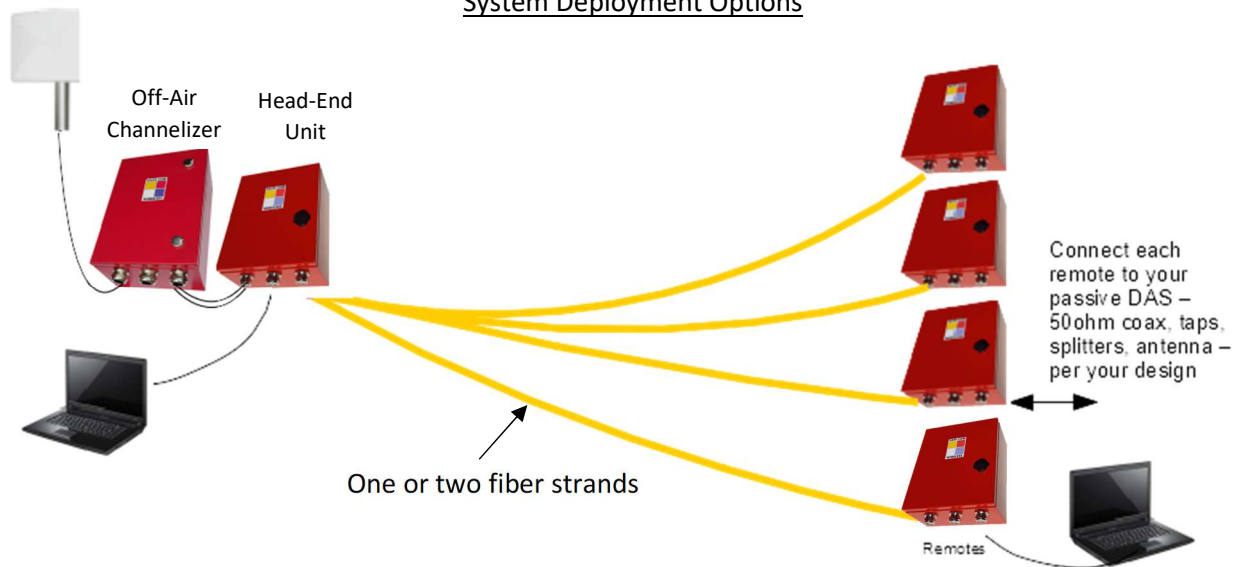

Off-Air Mode - Linear Topology

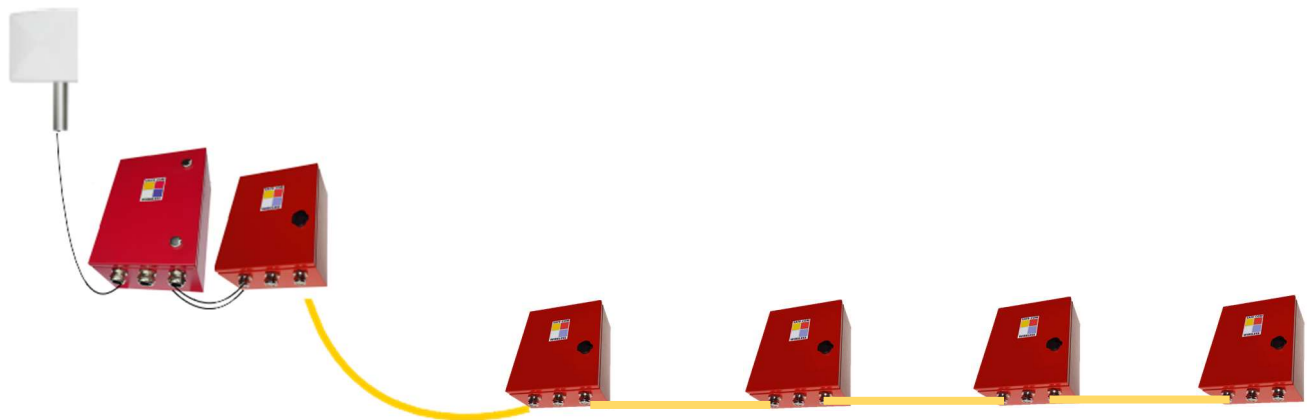

Off-Air Mode - Star / Linear Combination

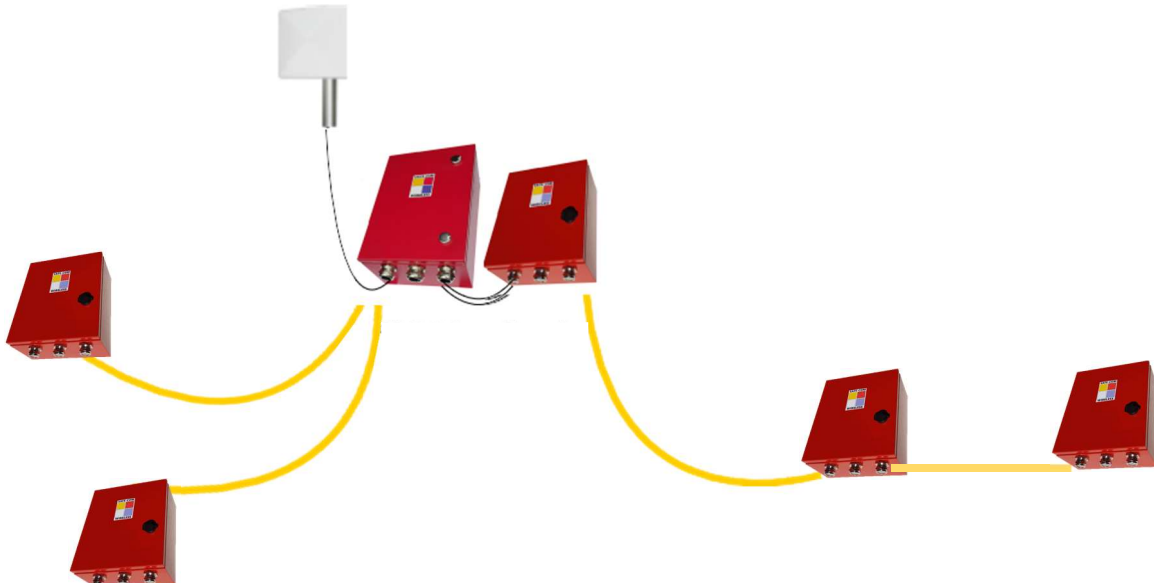

Safe-Com DASassure™
Public Safety Distributed Antenna System
Off-Air Solution
VHF, UHF, 700, 800 & 900 MHz

Series Model Number: SAFE-1000

Standard Features:

- NEMA 4 Enclosure
- NEMA Red Color
- Alarm outputs
- USB Computer Interface
with Windows NMS Configuration Software
- 110 – 240VAC Power Supply

SAFE-1010	: Head-end Fiber Unit – Direct Connect to Radio Base-Station
SAFE-1011	: Head-end Off-Air Unit – Connects to Channelizer
SAFE-1015	: Remote Fiber Unit
SAFE-1020	: Channelizer (Class A “BDA”) – Connects to Head-End Off-Air Unit

SAFE-1020: AV – BU – C7 – D8 – E9 – FF

A = Number of RF radio channel in VHF Band
B = Number of RF radio channel in UHF Band
C = Number of RF radio channel in 700 MHz Band – narrow-band
D = Number of RF radio channel in 800 MHz Band
E = Number of RF radio channels in 900 MHz Band
F = Number of RF radio channles in the BB First-Net Band

PX : Power options: X = 1 or 2 for number of AC power supplies. 1 is default, 2 requires external enclosure
BY : Battery options: Y = 12 or 24 for hours of Battery backup – external unit 10 x 12 x 6 inches, with charger.
TZ : Topology options: Z = S for Star (default) or L for Linear or X for hybrid (define configuration with order)
RS : Redundancy Switching at Card Level. Requires open plug-in slots available for backup card(s).
EN : Ethernet NMS option for remote access, monitoring and SNMP, (future, check availability at time of order)
SA : Integrated Spectrum Analyzer

SAFE-1010: 2U-27-4 Options: B24, T2L/2S

Description: Direct Connect Headend (SAFE-1010)
with two UHF (2U), two 700 (27) and four 800 (48) MHz channels

Options included: B24 = 24 Hours Battery backup
TL2-S2 = two linear connected remotes and 2 star connected remotes

Frequencies and modulation required with order – example detail shown:
two UHF: 453.475 DL/458.475 UL (FM) / 500.8 DL/503.8 UL (FM)
two 700 : 769.68125 DL (+30MHz UL) / 769.95625 DL (+30MHz UL) P25
two 800 : 854.3125 DL (-45MHz UL) / 854.4375 DL (-45MHz UL) P25

Power Supply	85-240 VAC (24 VDC, -48 VDC option) Note: Depending on configuration, power supply may be external unit
Power Consumption	65 watts maximum peak, 50 watts avg. (with 10 frequencies, lower power with fewer frequencies)
Size, weight	15 x 12 x 6.5 inches - 20 lbs. per unit
Enclosure, ports	NEMA 4, IP65, Heavy duty Nickle-plated brass water-proof cable feed-throughs
Alarms	NFPA alarm outputs, optically isolated contact closures
Battery Backup Option	12 or 24 hours – 300 x 275 x 165mm NEMA4
FCC Identifier	2AKSM-SAFE1

Safe-Com Wireless, Holmdel, NJ · patent-pending · safe-comwireless.com · Preliminary Data ©2017 Safe-Com Wireless, Rev 3-15-18
Tel 202-780-SAFE (72333)